



Test Report issued under the responsibility of:



TEST REPORT
IEC 62368-1
Audio/video, information and communication technology equipment
Part 1: Safety requirements

Report Number..... : CN24XDHF 001
Date of issue : October 23, 2024
Total number of pages : 70

Name of Testing Laboratory preparing the Report : **Dongguan Nore Testing Center Co., Ltd.**

Applicant's name : Shenzhen SDAPO Communication Co., Ltd.
Address : Room 6B30, Huaqiang North Pacific Security Market, Futian District, Shenzhen, Guangdong, P.R. China

Test specification:

Standard : IEC 62368-1:2018
Test procedure..... : CB Scheme
Non-standard test method..... : N/A

TRF template used : IECEE OD-2020-F1:2020, Ed.1.4
Test Report Form No...... : IEC62368_1E
Test Report Form(s) Originator.... : UL(US)
Master TRF : Dated 2022-04-14

Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description	POE Injector	
Trade Mark(s)	No trade mark	
Manufacturer	Dongguan SDAPO Communication Co., Ltd. 501, No.2 factory building, Tian An Shen Chuang Valley Industrial Center, Fenggang Town, Dongguan City, Guangdong, P.R. China	
Model/Type reference	PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B	
Ratings	Input: 100-240V~, 50/60Hz, 0.7A Max Output: 54Vdc, 0.6A	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	Dongguan Nore Testing Center Co., Ltd.
Testing location/ address	Building D, Gaosheng Science & Technology Park, Zhouxi Longxi Road, Nancheng District, Dongguan City, Guangdong, China	
Tested by (name, function, signature)	Mike Wang (Project Handler)	<i>mike wang</i>
Approved by (name, function, signature) ..	Ryan Luo (Reviewer)	<i>R Luo</i>
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	N/A
Testing location/ address	N/A	
Tested by (name, function, signature)		
Approved by (name, function, signature) ..		
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	N/A
Testing location/ address	N/A	
Tested by (name, function, signature)		
Witnessed by (name, function, signature) .		
Approved by (name, function, signature) ..		
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	N/A
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	N/A
Testing location/ address	N/A	
Tested by (name, function, signature)		
Witnessed by (name, function, signature) .		
Approved by (name, function, signature) ..		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment):

Attachment: National Differences (70 pages)

Attachment: Special National Differences (5 pages)

Attachment 1: Construction of transformer (3 pages)

Attachment 2: Photo documentation (13 pages)

Summary of testing:**Tests performed (name of test and test clause):**

- All applicable tests as described in Test Case and Measurement Sections were performed.
- Maximal ambient temperature as specified by the manufacturer: +40°C.
- Load conditions used during testing see appended table B.2.5 for details.

Following tests performed during evaluation:

5.2	Electrical energy source classifications
5.4.1.4, 9.3, B.1.5, B.2.6	Maximum operating temperatures for materials, components and systems
5.3.2	Accessibility to electrical energy sources and safeguards (Accessibility test)
5.4.1.8	Determination of working voltage
5.4.2, 5.4.3	Minimum Clearances/Creepage distance
5.4.4.2	Minimum distance through insulation
5.4.5	Antenna terminal insulation
5.4.8	Humidity conditioning
5.4.9	Electric strength test
5.5.2.2	Stored discharge on capacitors
5.6.6	Resistance of protective conductors and terminations
5.7.4	Unearthed accessible parts
5.7.5	Earthed accessible conductive part
6.2.2	Electrical power sources (PS) measurements for classification
B.2.5	Input tests
B.3	Simulated Abnormal operating condition tests
B.4	Simulated single fault conditions
F.3.9	Durability, legibility and permanence of markings
G.5.3.2	Transformer insulation
G.5.3.3	Transformer overload
G.8.2.2	Varistor overload test
Q.1	Limited power source test (LPS)
T.2	Steady force test, 10 N
T.5	Steady force test, 250 N
T.6	Impact test

Testing location:

Unless otherwise indicated, all tests were performed at the location stated in "Testing procedure and testing location".

T.8	Stress relief test	
<p>- If not otherwise specified, tests were performed on models PSE802G to represent other similar models.</p> <p>-The Unit passed all the test.</p>		

Summary of compliance with National Differences (List of countries addressed):

EU Group Differences, EU Special National Conditions, CA, US, SA, JP, AU, NZ, KR

Explanation of used codes: CA=Canada, US=United State of America, SA=Saudi Arabia, JP=Japan, AU=Australia, NZ=New Zealand, KR= Republic of Korea

For National Differences see attachment of this test report.

The product fulfils the requirements of EN IEC 62368-1:2020+A11:2020, UL 62368-1:2019, CSA C22.2 No. 62368-1:19; J62368-1(2023); AS/NZS 62368.1:2022; KC 62368-1(2021-08),

Use of uncertainty of measurement for decisions on conformity (decision rule) :

No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

Other:... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

Information on uncertainty of measurement:

The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

PoE Injector

Single-Port

Model Name: PSE802G

IEEE802.3at;Gigabit;2.5G

Power out Pin: Mode-A;Pin 1,2(+)/3,6(-)

Input:100-240V \sim ,50/60Hz,0.7A Max

Output:54V = 0.6A



CAUTION:INDOOR USE ONLY.

MADE IN CHINA

Dongguan SDAPO Communication Co.,Ltd.

Notes: Since similar label used, only label for models above listed to represent other similar ones.

Possible test case verdicts:	
- test case does not apply to the test object	
- test case does not apply to the test object	N/A
- test object does meet the requirement.....	
- test object does meet the requirement.....	P (Pass)
- test object does not meet the requirement	
- test object does not meet the requirement	F (Fail)
Testing:	
Date of receipt of test item	
Date of receipt of test item	July 06, 2024
Date (s) of performance of tests	
Date (s) of performance of tests	July 06, 2024 to August 20, 2024
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC60950-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)	
Name and address of factory (ies)	Dongguan SDAPO Communication Co., Ltd. 501, No.2 factory building, Tian An Shen Chuang Valley Industrial Center, Fenggang Town, Dongguan City, Guangdong, P.R. China
General product information and other remarks:	
1. This test report covers models PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B are POE Injector intended to be used for information technology equipment as a POE Injector for connection to Ethernet networks limited to the same building.	
2. The bottom enclosure is secured to the top enclosure by metal screws.	
3. The specified Max. ambient temperature is +40°C	
4. EUT includes signal terminal "Data in" and output terminal "POE".	
5. These models are in compliance with the requirements of Clause Q.1 (limited power source)	
Model differences:	
All models are identical to each other except for model names, colour of enclosure (according to different market needs).	
Others national differences listed as below:	
The product also fulfils the requirements of below national differences:	
<u>GB 4943.1-2022</u>	

OVERVIEW OF ENERGY SOURCES AND SAFEGUARDS				
Clause	Possible Hazard			
5	Electrically-caused injury			
Class and Energy Source (e.g. ES3: Primary circuit)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
ES3: Primary circuits supplied by a.c. mains supply	Ordinary	Equipment safeguard (for parts connected to Earth)	Equipment safeguard (Earthing)	Y-cap., transformer, Optical isolator, enclosure
ES3: Appliance inlet (for stored charge on X-capacitor)	Ordinary	N/A	N/A	X-capacitor, Bleeder resistors
ES3: Secondary circuit (measured transformer secondary pin 8,9-10,11)	Ordinary	N/A	N/A	enclosure
ES1: Secondary circuit after D3, accessible terminal, enclosure	Ordinary	N/A	N/A	N/A
6	Electrically-caused fire			
Class and Energy Source (e.g. PS2: 100 Watt circuit)	Material part (e.g. Printed board)	Safeguards		
		B	1 st S	2 nd S
PS3 / PS2 circuits	Enclosure	Equipment safeguard (e.g., no ignition occurs)	V-0	N/A
PS3 / PS2 circuits	PCB	Equipment safeguard (e.g., no ignition occurs)	V-1 or better	N/A
PS3 / PS2 circuits	The other components/materials	Equipment safeguard (e.g., no ignition occurs)	See 6.4.5, 6.4.6	N/A
PS2 circuits	Output connector	Equipment safeguard (e.g., no ignition occurs)	See 6.4.5	N/A
7	Injury caused by hazardous substances			
Class and Energy Source (e.g. Ozone)	Body Part (e.g., Skilled)	Safeguards		
		B	S	R
N/A	N/A	N/A	N/A	N/A
8	Mechanically-caused injury			

Class and Energy Source (e.g. MS3: Plastic fan blades)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
MS1: Edges and corners	Ordinary	N/A	N/A	N/A
MS1: Mass of the unit	Ordinary	N/A	N/A	N/A
MS1: Wall mount (<2m)	Ordinary	N/A	N/A	N/A
9	Thermal burn			
Class and Energy Source (e.g. TS1: Keyboard caps)	Body Part (e.g., Ordinary)	Safeguards		
		B	S	R
TS3: Internal parts/circuits	Ordinary	N/A	N/A	V-0 plastic enclosure
TS1: All accessible parts	Ordinary	N/A	N/A	N/A
10	Radiation			
Class and Energy Source (e.g. RS1: PMP sound output)	Body Part (e.g., Ordinary)	Safeguards		
		B	S	R
RS1: LED for indicating	Ordinary	N/A	N/A	N/A
Supplementary Information:				
"B" – Basic Safeguard; "S" – Supplementary Safeguard; "R" – Reinforced Safeguard				


ENERGY SOURCE DIAGRAM

Optional. Manufacturers are to provide the energy sources diagram identify declared energy sources and identifying the demarcations are between power sources. Recommend diagram be provided included in power supply and multipart systems.

Insert diagram below. Example diagram designs are; Block diagrams; image(s) with layered data; mechanical drawings

☒ ES ☒ PS ☒ MS ☒ TS ☒ RS

Main unit

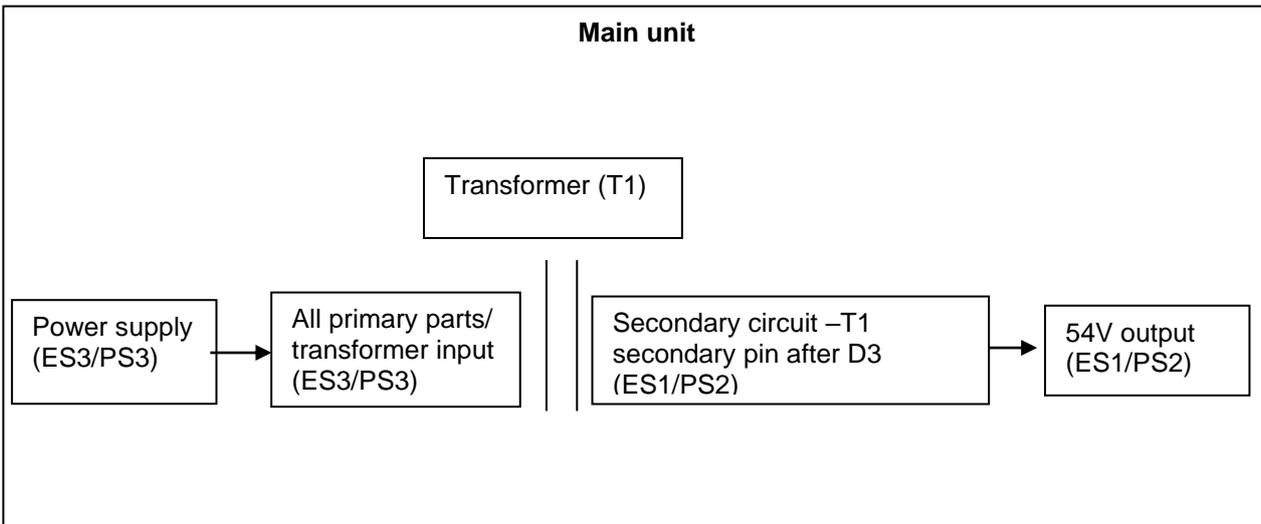

- Enclosure (TS1)
- Internal part(TS3)
- Edges and corners of enclosure (MS1)
- Mass of equipment (MS1)
- Wall mount (MS1)
- LED for indicating (RS1)

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4	GENERAL REQUIREMENTS		P
4.1.1	Acceptance of materials, components and subassemblies	(See appended table 4.1.2)	P
4.1.2	Use of components	Components which are certified to IEC and/or national standards are used correctly within their ratings. Components not covered by IEC standards are tested under the conditions present in the equipment. See also Annex G	P
4.1.3	Equipment design and construction	No accessible part which could cause injury. Also see sub-clause B.2, B.3 and B.4	P
4.1.4	Specified ambient temperature for outdoor use (°C):	Only indoor use.	N/A
4.1.5	Constructions and components not specifically covered		N/A
4.1.8	Liquids and liquid filled components (LFC)	No such components used	N/A
4.1.15	Markings and instructions	(See Annex F)	P
4.4.3	Safeguard robustness		P
4.4.3.1	General	See below.	P
4.4.3.2	Steady force tests	(See Clause T.5)	P
4.4.3.3	Drop tests		N/A
4.4.3.4	Impact tests	(See Clause T.6)	P
4.4.3.5	Internal accessible safeguard tests	The external enclosure cannot be opened without damaging the product	N/A
4.4.3.6	Glass impact tests	No such glass used.	N/A
4.4.3.7	Glass fixation tests	No such glass used.	N/A
	Glass impact test (1J)		N/A
	Push/pull test (10 N)		N/A
4.4.3.8	Thermoplastic material tests	(See Clause T.8)	P
4.4.3.9	Air comprising a safeguard	(See Clause T)	P
4.4.3.10	Accessibility, glass, safeguard effectiveness	No safeguard damaged.	P
4.4.4	Displacement of a safeguard by an insulating liquid	No such components used	N/A
4.4.5	Safety interlocks	No such components used	N/A
4.5	Explosion		P
4.5.1	General		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.5.2	No explosion during normal/abnormal operating condition	(See Clause B.2, B.3)	P
	No harm by explosion during single fault conditions	(See Clause B.4)	P
4.6	Fixing of conductors		P
	Fix conductors not to defeat a safeguard	Considered	P
	Compliance is checked by test	(See Clause T.2)	P
4.7	Equipment for direct insertion into mains socket-outlets		N/A
4.7.2	Mains plug part complies with relevant standard... :	Not direct plug-in equipment	N/A
4.7.3	Torque (Nm)..... :		N/A
4.8	Equipment containing coin/button cell batteries		N/A
4.8.1	General	No coin/button cell batteries used.	N/A
4.8.2	Instructional safeguard..... :		N/A
4.8.3	Battery compartment door/cover construction		N/A
	Open torque test		N/A
4.8.4.2	Stress relief test		N/A
4.8.4.3	Battery replacement test		N/A
4.8.4.4	Drop test		N/A
4.8.4.5	Impact test		N/A
4.8.4.6	Crush test		N/A
4.8.5	Compliance		N/A
	30N force test with test probe		N/A
	20N force test with test hook		N/A
4.9	Likelihood of fire or shock due to entry of conductive object		P
4.10	Component requirements		P
4.10.1	Disconnect Device	(See Annex L)	P
4.10.2	Switches and relays	No such components used	N/A

5	ELECTRICALLY-CAUSED INJURY		P
5.2	Classification and limits of electrical energy sources		P
5.2.2	ES1, ES2 and ES3 limits		P
5.2.2.2	Steady-state voltage and current limits	(See appended table 5.2)	P
5.2.2.3	Capacitance limits	(See appended table 5.2)	P
5.2.2.4	Single pulse limits..... :	No such single pulses generated in the EUT or applied to it.	N/A
5.2.2.5	Limits for repetitive pulses..... :	No such repetitive pulses within the EUT	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.2.6	Ringling signals	No such ringing signals within the EUT	N/A
5.2.2.7	Audio signals	No such audio signals	N/A
5.3	Protection against electrical energy sources		P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons	See "OVERVIEW OF EMPLOYED SAFEGUARDS" table.	P
5.3.1 a)	Accessible ES1/ES2 derived from ES2/ES3 circuits	Only ES1 circuit and the enclosure (safeguard) are accessed to person.	P
5.3.1 b)	Skilled persons not unintentional contact ES3 bare conductors		N/A
5.3.2.1	Accessibility to electrical energy sources and safeguards	Only ES1 circuit and the enclosure (safeguard) are accessed to person.	P
	Accessibility to outdoor equipment bare parts		N/A
5.3.2.2	Contact requirements	No opening of enclosure	P
	Test with test probe from Annex V		—
5.3.2.2 a)	Air gap – electric strength test potential (V)..... :		N/A
5.3.2.2 b)	Air gap – distance (mm)		N/A
5.3.2.3	Compliance		P
5.3.2.4	Terminals for connecting stripped wire	No stripped wire used.	N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material	The choice and application have been taken into account as specified in this Clause 5 and Annex T. Natural rubber, hygroscopic materials or asbestos are not used as insulation.	P
5.4.1.3	Material is non-hygroscopic	No hygroscopic material used.	N/A
5.4.1.4	Maximum operating temperature for insulating materials	(See appended table 5.4.1.4, 9.3, B.1.5, B.2.6)	P
5.4.1.5	Pollution degrees..... :	2	P
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound	Pollution degree 2 is applied. No insulating compound applied (however see 5.5.4).	N/A
5.4.1.5.3	Thermal cycling test	See above	N/A
5.4.1.6	Insulation in transformers with varying dimensions	No such transformer within the EUT	N/A
5.4.1.7	Insulation in circuits generating starting pulses	No such starting pulses within the EUT	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.1.8	Determination of working voltage	(See appended table 5.4.1.8)	P
5.4.1.9	Insulating surfaces	Considered.	P
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		N/A
5.4.1.10.2	Vicat test		N/A
5.4.1.10.3	Ball pressure test.....	The bobbin materials of T1 and L1 is phenolic. No other parts need to be tested.	N/A
5.4.2	Clearances	See below.	P
5.4.2.1	General requirements		P
	Clearances in circuits connected to AC Mains, Alternative method		N/A
5.4.2.2	Procedure 1 for determining clearance		P
	Temporary overvoltage	2000Vpeak	—
5.4.2.3	Procedure 2 for determining clearance		P
5.4.2.3.2.2	a.c. mains transient voltage	2500Vpeak	—
5.4.2.3.2.3	d.c. mains transient voltage		—
5.4.2.3.2.4	External circuit transient voltage		—
5.4.2.3.2.5	Transient voltage determined by measurement.....		—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test		N/A
5.4.2.5	Multiplication factors for clearances and test voltages	Altitude up to 2000m, multiplication factor for clearance is 1.0	N/A
5.4.2.6	Clearance measurement.....	(See appended table 5.4.2, 5.4.3)	P
5.4.3	Creepage distances		P
5.4.3.1	General		P
5.4.3.3	Material group.....	IIIa/IIIb	—
5.4.3.4	Creepage distances measurement.....	(See appended table 5.4.2, 5.4.3)	P
5.4.4	Solid insulation	See below	P
5.4.4.1	General requirements		P
5.4.4.2	Minimum distance through insulation	(See appended table 5.4.4.2)	P
5.4.4.3	Insulating compound forming solid insulation	See only 5.4.4.4 regarding to optocoupler.	P
5.4.4.4	Solid insulation in semiconductor devices	Approved optocoupler used. See table 4.1.2 for listed component used.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.4.5	Insulating compound forming cemented joints	No such construction within the EUT	N/A
5.4.4.6	Thin sheet material	See below	N/A
5.4.4.6.1	General requirements	The insulating tape on transformer not used as insulation	N/A
5.4.4.6.2	Separable thin sheet material	The insulating tape on transformer not used as insulation	N/A
	Number of layers (pcs)		N/A
5.4.4.6.3	Non-separable thin sheet material		N/A
	Number of layers (pcs)		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material.....		N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components	See G.5.3 and G.6.1	P
5.4.4.9	Solid insulation at frequencies >30 kHz, E_P , K_R , d , V_{PW} (V).....		N/A
	Alternative by electric strength test, tested voltage (V), K_R		N/A
5.4.5	Antenna terminal insulation	See below	P
5.4.5.1	General	See below	P
5.4.5.2	Voltage surge test	The insulation between L/N and accessible terminal is subjected to 50 discharges at maximum rate of 12/min, from a 1nF capacitor charged to 10kV	P
5.4.5.3	Insulation resistance ($M\Omega$)	Measured: >100 $M\Omega$	P
	Electric strength test.....	(See appended table 5.4.9)	P
5.4.6	Insulation of internal wire as part of supplementary safeguard	No such insulation of internal wire as part of supplementary safeguard.	N/A
5.4.7	Tests for semiconductor components and for cemented joints	No tests necessary –see only 5.4.4.4.	N/A
5.4.8	Humidity conditioning	Test was performed on product with each source of transformer listed in table 4.1.2.	P
	Relative humidity (%), temperature ($^{\circ}C$), duration (h)	93%, 40 $^{\circ}C$, 120h	—
5.4.9	Electric strength test		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.9.1	Test procedure for type test of solid insulation	Compliance was checked immediately following temperature test in 5.4.1.4 on the complete unit and on a sample of the transformer raised to the relevant temperature as measured during that test. (See appended table 5.4.9)	P
5.4.9.2	Test procedure for routine test	No routine tests considered. To be considered during the relevant national approval.	N/A
5.4.10	Safeguards against transient voltages from external circuits	POE Power Supply intended to be used for information technology equipment as a power supply for connection to Ethernet networks limited to the same building.	N/A
5.4.10.1	Parts and circuits separated from external circuits	The EUT does not intend to be connected directly such external circuits	N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test.....:		N/A
5.4.10.2.3	Steady-state test		N/A
5.4.10.3	Verification for insulation breakdown for impulse test		N/A
5.4.11	Separation between external circuits and earth	No such external circuits	N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	SPDs bridge separation between external circuit and earth		N/A
	Rated operating voltage U_{op} (V)		—
	Nominal voltage U_{peak} (V)		—
	Max increase due to variation ΔU_{sp}		—
	Max increase due to ageing ΔU_{sa}		—
5.4.11.3	Test method and compliance		N/A
5.4.12	Insulating liquid		N/A
5.4.12.1	General requirements		N/A
5.4.12.2	Electric strength of an insulating liquid		N/A
5.4.12.3	Compatibility of an insulating liquid.....:		N/A
5.4.12.4	Container for insulating liquid.....:		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.5	Components as safeguards		P
5.5.1	General	See the following details.	P
5.5.2	Capacitors and RC units	Approved X capacitor and Y capacitor provided.	P
5.5.2.1	General requirement	(See Clause G.11)	P
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector	(See appended table 5.5.2.2)	P
5.5.3	Transformers	(See Clause G.5.3)	P
5.5.4	Optocouplers	(See Clause G.12)	P
5.5.5	Relays	No such relay used	N/A
5.5.6	Resistors	No such resistor used	N/A
5.5.7	SPDs	No such component provided.	N/A
5.5.8	Insulation between the mains and an external circuit consisting of a coaxial cable	No such external circuits.	N/A
5.5.9	Safeguards for socket-outlets in outdoor equipment		N/A
	RCD rated residual operating current (mA)		—
5.6	Protective conductor		P
5.6.2	Requirement for protective conductors		P
5.6.2.1	General requirements		P
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirement for protective earthing conductors		N/A
	Protective earthing conductor size (mm ²)		—
	Protective earthing conductor serving as a reinforced safeguard		N/A
	Protective earthing conductor serving as a double safeguard		N/A
5.6.4	Requirements for protective bonding conductors		P
5.6.4.1	Protective bonding conductors	The PCB trace from PE of AC inlet to metal enclosure as protective bonding conductor and has sufficient current carrying capacity, also see sub-clause 5.6.6	P
	Protective bonding conductor size (mm ²).....	PCB trace : min.0.3mm ²	—
5.6.4.2	Protective current rating (A)	Building: 16A (13A for UK) Equipment: 2A Max.	P
5.6.5	Terminals for protective conductors		P
5.6.5.1	Terminal size for connecting protective earthing conductors (mm)	Approved appliance inlet used.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Terminal size for connecting protective bonding conductors (mm)..... :		N/A
5.6.5.2	Corrosion	(See Annex N)	P
5.6.6	Resistance of the protective bonding system	See below	P
5.6.6.1	Requirements		P
5.6.6.2	Test Method	(See appended table 5.6.6)	P
5.6.6.3	Resistance (Ω) or voltage drop	(See appended table 5.6.6)	P
5.6.7	Reliable connection of a protective earthing conductor	Not permanently connected equipment	N/A
5.6.8	Functional earthing		N/A
	Conductor size (mm^2)		N/A
	Class II with functional earthing marking		N/A
	Appliance inlet cl & cr (mm)		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		P
5.7.2	Measuring devices and networks		P
5.7.2.1	Measurement of touch current	(See appended table 5.7.4)	P
5.7.2.2	Measurement of voltage	(See appended table 5.2)	P
5.7.3	Equipment set-up, supply connections and earth connections	Clause 4, 5.3 and 5.4 of IEC 60990: 1999 applied.	P
5.7.4	Unearthed accessible parts	(See appended table 5.7.4)	P
5.7.5	Earthed accessible conductive parts	(See appended table 5.7.5)	P
5.7.6	Requirements when touch current exceeds ES2 limits	Touch current not exceeds ES2 limits.	N/A
	Protective conductor current (mA)		N/A
	Instructional Safeguard		N/A
5.7.7	Prospective touch voltage and touch current associated with external circuits		N/A
5.7.7.1	Touch current from coaxial cables		N/A
5.7.7.2	Prospective touch voltage and touch current associated with paired conductor cables		N/A
5.7.8	Summation of touch currents from external circuits		N/A
	a) Equipment connected to earthed external circuits, current (mA)		N/A
	b) Equipment connected to unearthed external circuits, current (mA)		N/A
5.8	Backfeed safeguard in battery backed up supplies		N/A
	Mains terminal ES		N/A
	Air gap (mm)		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6	ELECTRICALLY- CAUSED FIRE		P
6.2	Classification of PS and PIS		P
6.2.2	Power source circuit classifications	(See appended table 6.2.2)	P
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS	(See appended table 6.2.3.1)	P
6.2.3.2	Resistive PIS	(See appended table 6.2.3.2)	P
6.3	Safeguards against fire under normal operating and abnormal operating conditions		P
6.3.1	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials	(See appended table B.1.5 and B.3)	P
	Combustible materials outside fire enclosure.....		N/A
6.4	Safeguards against fire under single fault conditions		P
6.4.1	Safeguard method	Method of Control fire spread used, V-0 fire enclosure provided.	P
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits	See above.	N/A
6.4.3.1	Supplementary safeguards		N/A
6.4.3.2	Single Fault Conditions	(See appended table B.3, B.4)	N/A
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		P
6.4.5	Control of fire spread in PS2 circuits	See below	P
6.4.5.2	Supplementary safeguards	Compliance detailed as follows: <ul style="list-style-type: none"> - <u>Printed board</u>: rated min. V-1 - <u>All other components</u>: at least V-2 except for components mounted on min. V-1 material or small parts of combustible material. - <u>Isolating transformer</u>: complying with G.5.3. 	P
6.4.6	Control of fire spread in PS3 circuits	Compliance detailed as follows: <ul style="list-style-type: none"> - Parts as in 6.4.5 above - Inlet: complying to IEC standard - Fire enclosure: rated V-0 used. 	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.7	Separation of combustible materials from a PIS	Fire enclosure provided.	N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers	See below.	P
6.4.8.2	Fire enclosure and fire barrier material properties		P
6.4.8.2.1	Requirements for a fire barrier	The output connector used as fire barrier to fill an opening	P
6.4.8.2.2	Requirements for a fire enclosure	Fire enclosure: rated V-0 used.	P
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		P
6.4.8.3.1	Fire enclosure and fire barrier openings		P
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top openings and properties	No openings in fire enclosure.	N/A
	Openings dimensions (mm)		N/A
6.4.8.3.4	Bottom openings and properties	See below	P
	Openings dimensions (mm)	Numerous rectangle openings, with width dimension 0.75mm max. openings that do not exceed 1 mm in width regardless of length;	P
	Flammability tests for the bottom of a fire enclosure		N/A
	Instructional Safeguard		N/A
6.4.8.3.5	Side openings and properties	See below	P
	Openings dimensions (mm)	Numerous rectangle openings, with width dimension 0.75mm max. openings that do not exceed 1 mm in width regardless of length;	P
6.4.8.3.6	Integrity of a fire enclosure, condition met: a), b) or c)		N/A
6.4.8.4	Separation of a PIS from a fire enclosure and a fire barrier distance (mm) or flammability rating	Fire enclosure is made of V-0 material, other part see 6.4.8.2.1	P
6.4.9	Flammability of insulating liquid		N/A
6.5	Internal and external wiring		N/A
6.5.1	General requirements	No such wire used.	N/A
6.5.2	Requirements for interconnection to building wiring	No such interconnection to building wiring.	N/A
6.5.3	Internal wiring size (mm ²) for socket-outlets		N/A
6.6	Safeguards against fire due to the connection to additional equipment		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
7	INJURY CAUSED BY HAZARDOUS SUBSTANCES		N/A
7.2	Reduction of exposure to hazardous substances		N/A
7.3	Ozone exposure		N/A
7.4	Use of personal safeguards or personal protective equipment (PPE)		N/A
	Personal safeguards and instructions..... :		—
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010)..... :		—
7.6	Batteries and their protection circuits		N/A

8	MECHANICALLY-CAUSED INJURY		P
8.2	Mechanical energy source classifications		P
8.3	Safeguards against mechanical energy sources		P
8.4	Safeguards against parts with sharp edges and corners		P
8.4.1	Safeguards	MS1: Edges and corners of enclosure.	P
	Instructional Safeguard..... :		N/A
8.4.2	Sharp edges or corners	MS1: Edges and corners of enclosure.	P
8.5	Safeguards against moving parts		N/A
8.5.1	Fingers, jewellery, clothing, hair, etc., contact with MS2 or MS3 parts	No moving parts.	N/A
	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
	Moving MS3 parts only accessible to skilled person		N/A
8.5.2	Instructional safeguard..... :		N/A
8.5.4	Special categories of equipment containing moving parts		N/A
8.5.4.1	General		N/A
8.5.4.2	Equipment containing work cells with MS3 parts		N/A
8.5.4.2.1	Protection of persons in the work cell		N/A
8.5.4.2.2	Access protection override		N/A
8.5.4.2.2.1	Override system		N/A
8.5.4.2.2.2	Visual indicator		N/A
8.5.4.2.3	Emergency stop system		N/A
	Maximum stopping distance from the point of activation (m)..... :		N/A
	Space between end point and nearest fixed mechanical part (mm)..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.5.4.2.4	Endurance requirements		N/A
	Mechanical system subjected to 100 000 cycles of operation		N/A
	- Mechanical function check and visual inspection		N/A
	- Cable assembly..... :		N/A
8.5.4.3	Equipment having electromechanical device for destruction of media		N/A
8.5.4.3.1	Equipment safeguards		N/A
8.5.4.3.2	Instructional safeguards against moving parts..... :		N/A
8.5.4.3.3	Disconnection from the supply		N/A
8.5.4.3.4	Cut type and test force (N)..... :		N/A
8.5.4.3.5	Compliance		N/A
8.5.5	High pressure lamps		N/A
	Explosion test..... :		N/A
8.5.5.3	Glass particles dimensions (mm)..... :		N/A
8.6	Stability of equipment		N/A
8.6.1	General	Classification MS1 according to table 35, line 5 and no stability requirements.	N/A
	Instructional safeguard..... :		N/A
8.6.2	Static stability		N/A
8.6.2.2	Static stability test..... :		N/A
8.6.2.3	Downward force test		N/A
8.6.3	Relocation stability		N/A
	Wheels diameter (mm)..... :		—
	Tilt test		N/A
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test..... :		N/A
8.7	Equipment mounted to wall, ceiling or other structure		N/A
8.7.1	Mount means type..... :	MS1: Wall mount	N/A
8.7.2	Test methods		N/A
	Test 1, additional downwards force (N)..... :	--	N/A
	Test 2, number of attachment points and test force (N)..... :		N/A
	Test 3 Nominal diameter (mm) and applied torque (Nm)..... :		N/A
8.8	Handles strength		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.8.1	General		N/A
8.8.2	Handle strength test		N/A
	Number of handles :		—
	Force applied (N)..... :		—
8.9	Wheels or casters attachment requirements		N/A
8.9.2	Pull test		N/A
8.10	Carts, stands and similar carriers		N/A
8.10.1	General		N/A
8.10.2	Marking and instructions :		N/A
8.10.3	Cart, stand or carrier loading test		N/A
	Loading force applied (N)..... :		N/A
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Force applied (N)..... :		—
8.10.6	Thermoplastic temperature stability		N/A
8.11	Mounting means for slide-rail mounted equipment (SRME)		N/A
8.11.1	General		N/A
8.11.2	Requirements for slide rails		N/A
	Instructional Safeguard :		N/A
8.11.3	Mechanical strength test		N/A
8.11.3.1	Downward force test, force (N) applied :		N/A
8.11.3.2	Lateral push force test		N/A
8.11.3.3	Integrity of slide rail end stops		N/A
8.11.4	Compliance		N/A
8.12	Telescoping or rod antennas		N/A
	Button/ball diameter (mm)..... :		—

9	THERMAL BURN INJURY		P
9.2	Thermal energy source classifications		P
9.3	Touch temperature limits		P
9.3.1	Touch temperatures of accessible parts..... :	The equipment evaluated by temperature test. (See appended table 5.4.1.4, 9.3, B.1.5, B.2.6)	P
9.3.2	Test method and compliance	(See appended table 5.4.1.4, 9.3, B.1.5, B.2.6)	P
9.4	Safeguards against thermal energy sources		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
9.5	Requirements for safeguards		P
9.5.1	Equipment safeguard		P
9.5.2	Instructional safeguard		N/A
9.6	Requirements for wireless power transmitters		N/A
9.6.1	General		N/A
9.6.2	Specification of the foreign objects		N/A
9.6.3	Test method and compliance		N/A

10	RADIATION		P
10.2	Radiation energy source classification		P
10.2.1	General classification	The LED only used for indicating, which is considered as low power & inherently exempt group according to IEC 62471	P
	Lasers		—
	Lamps and lamp systems		—
	Image projectors		—
	X-Ray		—
	Personal music player.....		—
10.3	Safeguards against laser radiation		N/A
	The standard(s) equipment containing laser(s) comply		N/A
10.4	Safeguards against optical radiation from lamps and lamp systems (including LED types)		P
10.4.1	General requirements	LED indicator are considered as RS1.	P
	Instructional safeguard provided for accessible radiation level needs to exceed		N/A
	Risk group marking and location		N/A
	Information for safe operation and installation		N/A
10.4.2	Requirements for enclosures		N/A
	UV radiation exposure.....		N/A
10.4.3	Instructional safeguard.....		N/A
10.5	Safeguards against X-radiation		N/A
10.5.1	Requirements		N/A
	Instructional safeguard for skilled persons		—
10.5.3	Maximum radiation (pA/kg)		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.6	Safeguards against acoustic energy sources		N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output $L_{Aeq,T}$, dB(A)	:	N/A
	Unweighted RMS output voltage (mV)	:	N/A
	Digital output signal (dBFS)	:	N/A
10.6.3	Requirements for dose-based systems		N/A
10.6.3.1	General requirements		N/A
10.6.3.2	Dose-based warning and automatic decrease		N/A
10.6.3.3	Exposure-based warning and requirements		N/A
	30 s integrated exposure level (MEL30)	:	N/A
	Warning for MEL \geq 100 dB(A)	:	N/A
10.6.4	Measurement methods		N/A
10.6.5	Protection of persons		N/A
	Instructional safeguards	:	N/A
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	Corded listening devices with analogue input		N/A
	Listening device input voltage (mV)	:	N/A
10.6.6.2	Corded listening devices with digital input		N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A)	:	N/A
10.6.6.3	Cordless listening devices		N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A)	:	N/A

B	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS		P
B.1	General		P
B.1.5	Temperature measurement conditions	(See appended table B.1.5)	P
B.2	Normal operating conditions		P
B.2.1	General requirements	(See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers	Not such equipment.	N/A
B.2.3	Supply voltage and tolerances	+10 % and -10 % considered.	P
B.2.5	Input test	(See appended table B.2.5)	P
B.3	Simulated abnormal operating conditions		P
B.3.1	General	(See appended table B.3, B.4)	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.3.2	Covering of ventilation openings	No ventilation openings	N/A
	Instructional safeguard.....:		N/A
B.3.3	DC mains polarity test	The EUT is not connected to a D.C. mains	N/A
B.3.4	Setting of voltage selector	No voltage selector was used.	N/A
B.3.5	Maximum load at output terminals	(See appended table B.3, B.4)	P
B.3.6	Reverse battery polarity	No battery used.	N/A
B.3.7	Audio amplifier abnormal operating conditions	Not such equipment.	N/A
B.3.8	Safeguards functional during and after abnormal operating conditions.....:	All safeguards remained effective.	P
B.4	Simulated single fault conditions		P
B.4.1	General		P
B.4.2	Temperature controlling device	No such devices.	N/A
B.4.3	Blocked motor test	No such devices.	N/A
B.4.4	Functional insulation	(See appended table B.3, B.4)	P
B.4.4.1	Short circuit of clearances for functional insulation	(See appended table B.3, B.4)	P
B.4.4.2	Short circuit of creepage distances for functional insulation	(See appended table B.3, B.4)	P
B.4.4.3	Short circuit of functional insulation on coated printed boards	No coated printed boards used.	N/A
B.4.5	Short-circuit and interruption of electrodes in tubes and semiconductors	(See appended table B.3, B.4)	P
B.4.6	Short circuit or disconnection of passive components	(See appended table B.3, B.4)	P
B.4.7	Continuous operation of components	The EUT is continuous operating type and no such components intended for short time operation or intermittent operation	N/A
B.4.8	Compliance during and after single fault conditions.....:	(See appended table B.3, B.4)	P
B.4.9	Battery charging and discharging under single fault conditions	No battery used.	N/A
C	UV RADIATION		N/A
C.1	Protection of materials in equipment from UV radiation		N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus.....:		N/A
C.2.2	Mounting of test samples		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
C.2.3	Carbon-arc light-exposure test		N/A
C.2.4	Xenon-arc light-exposure test		N/A
D	TEST GENERATORS		P
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		P
D.3	Electronic pulse generator		N/A
E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS		N/A
E.1	Electrical energy source classification for audio signals		N/A
	Maximum non-clipped output power (W)		—
	Rated load impedance (Ω)		—
	Open-circuit output voltage (V)		—
	Instructional safeguard.....		—
E.2	Audio amplifier normal operating conditions		N/A
	Audio signal source type		—
	Audio output power (W)		—
	Audio output voltage (V)		—
	Rated load impedance (Ω)		—
	Requirements for temperature measurement		N/A
E.3	Audio amplifier abnormal operating conditions		N/A
F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS		P
F.1	General		P
	Language	English. The other languages will be provided during the national approval.	—
F.2	Letter symbols and graphical symbols		P
F.2.1	Letter symbols according to IEC60027-1	Letter symbols for quantities and units are complied with IEC 60027-1.	P
F.2.2	Graphic symbols according to IEC, ISO or manufacturer specific	Graphical symbols are complied with IEC 60417, ISO 3864-2, ISO 7000 or ISO 7010.	P
F.3	Equipment markings		P
F.3.1	Equipment marking locations	The required marking is located on the enclosure of the equipment and is easily visible.	P
F.3.2	Equipment identification markings	See copy of marking plate.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.2.1	Manufacturer identification	See copy of marking plate.	P
F.3.2.2	Model identification	See model list.	P
F.3.3	Equipment rating markings	See the following details.	P
F.3.3.1	Equipment with direct connection to mains	The equipment is connected to AC mains supply.	P
F.3.3.2	Equipment without direct connection to mains		N/A
F.3.3.3	Nature of the supply voltage	See copy of marking plate	P
F.3.3.4	Rated voltage	See copy of marking plate	P
F.3.3.5	Rated frequency	See copy of marking plate	P
F.3.3.6	Rated current or rated power	See copy of marking plate	P
F.3.3.7	Equipment with multiple supply connections	Only one supply connection.	N/A
F.3.4	Voltage setting device	No such devices within the equipment.	N/A
F.3.5	Terminals and operating devices	See below.	P
F.3.5.1	Mains appliance outlet and socket-outlet markings	No such devices within the equipment.	N/A
F.3.5.2	Switch position identification marking	No such devices within the equipment.	N/A
F.3.5.3	Replacement fuse identification and rating markings	The fuse is located within the equipment and not replaceable by an ordinary person or an instructed person. marking provided on PCB: F1: F2AL 250V	P
	Instructional safeguards for neutral fuse.....		N/A
F.3.5.4	Replacement battery identification marking	No such battery within the equipment.	N/A
F.3.5.5	Neutral conductor terminal	No permanently connected equipment	N/A
F.3.5.6	Terminal marking location		P
F.3.6	Equipment markings related to equipment classification	See below.	P
F.3.6.1	Class I equipment		P
F.3.6.1.1	Protective earthing conductor terminal	Protective earthing symbol marked on the appliance coupler	P
F.3.6.1.2	Protective bonding conductor terminals		N/A
F.3.6.2	Equipment class marking	Class I equipment	N/A
F.3.6.3	Functional earthing terminal marking		N/A
F.3.7	Equipment IP rating marking	IPX0.	N/A
F.3.8	External power supply output marking	See copy of marking plate.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.9	Durability, legibility and permanence of marking	Marking is considered to be legible and easily discernible. See also the following details.	P
F.3.10	Test for permanence of markings	The label was subjected to the permanence of marking test. The label was rubbed with cloth soaked with water for 15 sec. And then again for 15 sec, with the cloth soaked with petroleum spirit. After this test there was no damage to the label. The marking on the label did not fade. There was no curling and lifting of the label edge. After each test, the marking remained legible.	P
F.4	Instructions		P
	a) Information prior to installation and initial use		P
	b) Equipment for use in locations where children not likely to be present		N/A
	c) Instructions for installation and interconnection	Provided in user's manual.	P
	d) Equipment intended for use only in restricted access area		N/A
	e) Equipment intended to be fastened in place		N/A
	f) Instructions for audio equipment terminals	No such terminals provided.	N/A
	g) Protective earthing used as a safeguard		P
	h) Protective conductor current exceeding ES2 limits		N/A
	i) Graphic symbols used on equipment		N/A
	j) Permanently connected equipment not provided with all-pole mains switch		N/A
	k) Replaceable components or modules providing safeguard function		N/A
	l) Equipment containing insulating liquid		N/A
	m) Installation instructions for outdoor equipment		N/A
F.5	Instructional safeguards		N/A
G	COMPONENTS		P
G.1	Switches		N/A
G.1.1	General	No switch used.	N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.1.3	Test method and compliance		N/A
G.2	Relays		N/A
G.2.1	Requirements	No relay used.	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supplying power to other equipment		N/A
G.2.4	Test method and compliance		N/A
G.3	Protective devices		P
G.3.1	Thermal cut-offs		N/A
	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Test method and compliance		N/A
G.3.2	Thermal links		N/A
G.3.2.1	a) Thermal links tested separately according to IEC 60691 with specifics		N/A
	b) Thermal links tested as part of the equipment		N/A
G.3.2.2	Test method and compliance		N/A
G.3.3	PTC thermistors	No PTC thermistor used.	N/A
G.3.4	Overcurrent protection devices	Current fuse complying with IEC 60127 as overcurrent protection device. (see appended table 4.1.2)	P
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.4		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions		N/A
G.4	Connectors		P
G.4.1	Spacings	No such connector with insulated surfaces accessible within the EUT.	N/A
G.4.2	Mains connector configuration	Appliance AC inlet complied with standard.	P
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely	Output connector insert into a mains connector is unlikely to occur.	P
G.5	Wound components		P
G.5.1	Wire insulation in wound components	Approved triple insulated wire used as Reinforced insulation for secondary winding of transformer.	P
G.5.1.2	Protection against mechanical stress	Physical separation provided by insulation tube.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.2	Endurance test		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Test time (days per cycle)		—
	Test temperature (°C)		—
G.5.2.3	Wound components supplied from the mains		N/A
G.5.2.4	No insulation breakdown		N/A
G.5.3	Transformers		P
G.5.3.1	Compliance method	The transformers meet the requirements given in G.5.3.2 and G.5.3.3.	P
	Position	T1	P
	Method of protection	By protection circuit design.	P
G.5.3.2	Insulation	Primary windings and secondary windings are separated by Reinforced insulation.	P
	Protection from displacement of windings	The end-turn of each winding is fixed by insulating tape or insulation tube.	—
G.5.3.3	Transformer overload tests	(See appended tables B.3, B.4)	P
G.5.3.3.1	Test conditions	Tested in the complete equipment.	P
G.5.3.3.2	Winding temperatures	(See appended tables B.3, B.4)	P
G.5.3.3.3	Winding temperatures - alternative test method		N/A
G.5.3.4	Transformers using FIW		N/A
G.5.3.4.1	General		N/A
	FIW wire nominal diameter		—
G.5.3.4.2	Transformers with basic insulation only		N/A
G.5.3.4.3	Transformers with double insulation or reinforced insulation		N/A
G.5.3.4.4	Transformers with FIW wound on metal or ferrite core		N/A
G.5.3.4.5	Thermal cycling test and compliance		N/A
G.5.3.4.6	Partial discharge test		N/A
G.5.3.4.7	Routine test		N/A
G.5.4	Motors	No motor used.	N/A
G.5.4.1	General requirements		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.4.2	Motor overload test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4.2	Locked-rotor overload test		N/A
	Test duration (days)		—
G.5.4.5	Running overload test for DC motors		N/A
G.5.4.5.2	Tested in the unit		N/A
G.5.4.5.3	Alternative method		N/A
G.5.4.6	Locked-rotor overload test for DC motors		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature		N/A
G.5.4.6.3	Alternative method		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage		—
G.6	Wire Insulation		P
G.6.1	General	Triple insulated winding in transformer secondary windings used as reinforced safeguard in the isolating transformer that has separately complied with Annex J.	P
G.6.2	Enamelled winding wire insulation		N/A
G.7	Mains supply cords		P
G.7.1	General requirements	Approved power cord used	P
	Type	See appended table 4.1.2	—
G.7.2	Cross sectional area (mm ² or AWG).....	Detachable power cord set used	N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N)		N/A
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm)		N/A
G.7.3.2.4	Strain relief and cord anchorage material		N/A
G.7.4	Cord Entry		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Test method and compliance		N/A
	Overall diameter or minor overall dimension, D (mm).....:		—
	Radius of curvature after test (mm)		—
G.7.6	Supply wiring space		N/A
G.7.6.1	General requirements		N/A
G.7.6.2	Stranded wire	No such wire used	N/A
G.7.6.2.1	Requirements		N/A
G.7.6.2.2	Test with 8 mm strand		N/A
G.8	Varistors		P
G.8.1	General requirements	RV1 used in primary (mains) between L and N.	P
G.8.2	Safeguards against fire	Approved RV1 used, see table 4.1.2 for details.	P
G.8.2.1	General	Method of control fore spread used. The varistor overload test is considered.	P
G.8.2.2	Varistor overload test	Each type of varistor are considered. During and following the test, the varistor no damaged, no risk of fire and equipment safeguards is remain effective.	P
G.8.2.3	Temporary overvoltage test		N/A
G.9	Integrated circuit (IC) current limiters		N/A
G.9.1	Requirements		N/A
	IC limiter output current (max. 5A).....:		—
	Manufacturers' defined drift		—
G.9.2	Test Program		N/A
G.9.3	Compliance		N/A
G.10	Resistors		N/A
G.10.1	General		N/A
G.10.2	Conditioning		N/A
G.10.3	Resistor test		N/A
G.10.4	Voltage surge test		N/A
G.10.5	Impulse test		N/A
G.10.6	Overload test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.11	Capacitors and RC units		P
G.11.1	General requirements	The X-Capacitor and the Y-Capacitor are used as safeguard and complied with IEC/EN 60384-14:2013. (see appended table 4.1.2)	P
G.11.2	Conditioning of capacitors and RC units		P
G.11.3	Rules for selecting capacitors		P
G.12	Optocouplers		P
	Optocouplers comply with IEC 60747-5-5 with specifics	The optocouplers used in the equipment are complied with IEC 60747-5-5. (see appended table 4.1.2)	P
	Type test voltage $V_{ini,a}$:	See above.	—
	Routine test voltage, $V_{ini,b}$:	See above.	—
G.13	Printed boards		P
G.13.1	General requirements	See below.	P
G.13.2	Uncoated printed boards	The insulation between conductors on the outer surfaces of an uncoated printed board complied with the minimum clearance and creepage requirements of 5.4.2 and 5.4.3.	P
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation.....:		N/A
	Number of insulation layers (pcs)		—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2	Test method and compliance		N/A
G.14	Coating on components terminals		N/A
G.14.1	Requirements	No coating on component terminals considered to affect creepage or clearances.	N/A
G.15	Pressurized liquid filled components		N/A
G.15.1	Requirements		N/A
G.15.2	Test methods and compliance		N/A
G.15.2.1	Hydrostatic pressure test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.15.2.2	Creep resistance test		N/A
G.15.2.3	Tubing and fittings compatibility test		N/A
G.15.2.4	Vibration test		N/A
G.15.2.5	Thermal cycling test		N/A
G.15.2.6	Force test		N/A
G.15.3	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
G.16.1	Condition for fault tested is not required	No such discharge IC used.	N/A
	ICX with associated circuitry tested in equipment		N/A
	ICX tested separately		N/A
G.16.2	Tests		N/A
	Smallest capacitance and smallest resistance specified by ICX manufacturer for impulse test		—
	Mains voltage that impulses to be superimposed on		—
	Largest capacitance and smallest resistance for ICX tested by itself for 10000 cycles test		—
G.16.3	Capacitor discharge test		N/A
H	CRITERIA FOR TELEPHONE RINGING SIGNALS		N/A
H.1	General		N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringing signal		N/A
H.3.1.1	Frequency (Hz)		—
H.3.1.2	Voltage (V)		—
H.3.1.3	Cadence; time (s) and voltage (V)		—
H.3.1.4	Single fault current (mA):		—
H.3.2	Tripping device and monitoring voltage		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V)		N/A
J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION		P
J.1	General		P
	Winding wire insulation	Approved triple insulated wire used in transformer T1.	—
	Solid round winding wire, diameter (mm)		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Solid square and rectangular (flatwise bending) winding wire, cross-sectional area (mm ²)		N/A
J.2/J.3	Tests and Manufacturing		—
K	SAFETY INTERLOCKS		N/A
K.1	General requirements		N/A
	Instructional safeguard.....		N/A
K.2	Components of safety interlock safeguard mechanism		N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
K.5.1	Under single fault condition		N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Test method and compliance		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements		N/A
	In circuit connected to mains, separation distance for contact gaps (mm)		N/A
	In circuit isolated from mains, separation distance for contact gaps (mm)		N/A
	Electric strength test before and after the test of K.7.2		N/A
K.7.2	Overload test, Current (A)		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test		N/A
L	DISCONNECT DEVICES		P
L.1	General requirements	The appliance coupler used as disconnect device.	P
L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized	When the power cord is removed from the inlet no remaining parts with hazardous voltage in the equipment.	P
L.4	Single-phase equipment	The disconnect device disconnects both poles simultaneously.	P
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
L.8	Multiple power sources		N/A
	Instructional safeguard.....:		N/A
M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS		N/A
M.1	General requirements		N/A
M.2	Safety of batteries and their cells		N/A
M.2.1	Batteries and their cells comply with relevant IEC standards		N/A
M.3	Protection circuits for batteries provided within the equipment		N/A
M.3.1	Requirements		N/A
M.3.2	Test method		N/A
	Overcharging of a rechargeable battery		N/A
	Excessive discharging		N/A
	Unintentional charging of a non-rechargeable battery		N/A
	Reverse charging of a rechargeable battery		N/A
M.3.3	Compliance		N/A
M.4	Additional safeguards for equipment containing a portable secondary lithium battery		N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Requirements		N/A
M.4.2.2	Compliance		N/A
M.4.3	Fire enclosure		N/A
M.4.4	Drop test of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation and procedure for the drop test		N/A
M.4.4.3	Drop, Voltage on reference and dropped batteries (V); voltage difference during 24 h period (%):		N/A
M.4.4.4	Check of the charge/discharge function		N/A
M.4.4.5	Charge / discharge cycle test		N/A
M.4.4.6	Compliance		N/A
M.5	Risk of burn due to short-circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Test method and compliance		N/A
M.6	Safeguards against short-circuits		N/A
M.6.1	External and internal faults		N/A
M.6.2	Compliance		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.7	Risk of explosion from lead acid and NiCd batteries		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
	Calculated hydrogen generation rate.....:		N/A
M.7.2	Test method and compliance		N/A
	Minimum air flow rate, Q (m ³ /h)		N/A
M.7.3	Ventilation tests		N/A
M.7.3.1	General		N/A
M.7.3.2	Ventilation test – alternative 1		N/A
	Hydrogen gas concentration (%)		N/A
M.7.3.3	Ventilation test – alternative 2		N/A
	Obtained hydrogen generation rate		N/A
M.7.3.4	Ventilation test – alternative 3		N/A
	Hydrogen gas concentration (%)		N/A
M.7.4	Marking		N/A
M.8	Protection against internal ignition from external spark sources of batteries with aqueous electrolyte		N/A
M.8.1	General		N/A
M.8.2	Test method		N/A
M.8.2.1	General		N/A
M.8.2.2	Estimation of hypothetical volume V_z (m ³ /s).....:		—
M.8.2.3	Correction factors.....:		—
M.8.2.4	Calculation of distance d (mm)		—
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage		N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse		N/A
	Instructional safeguard.....:		N/A
N	ELECTROCHEMICAL POTENTIALS		P
	Material(s) used	Considered.	—
O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES		P
	Value of X (mm)	Considered.	—
P	SAFEGUARDS AGAINST CONDUCTIVE OBJECTS		P
P.1	General		P
P.2	Safeguards against entry or consequences of entry of a foreign object		P
P.2.1	General		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
P.2.2	Safeguards against entry of a foreign object		P
	Location and Dimensions (mm)	Numerous rectangle bottom and side openings, with width dimension 0.75mm max. openings that do not exceed 1 mm in width regardless of length;	—
P.2.3	Safeguards against the consequences of entry of a foreign object		N/A
P.2.3.1	Safeguard requirements		N/A
	The ES3 and PS3 keep-out volume in Figure P.3 not applicable to transportable equipment		N/A
	Transportable equipment with metalized plastic parts		N/A
P.2.3.2	Consequence of entry test		N/A
P.3	Safeguards against spillage of internal liquids		N/A
P.3.1	General		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Compliance		N/A
P.4	Metallized coatings and adhesives securing parts		N/A
P.4.1	General		N/A
P.4.2	Tests		N/A
	Conditioning, T _c (°C)		—
	Duration (weeks)		—
Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		P
Q.1	Limited power sources	See appended table Annex Q.1	P
Q.1.1	Requirements		P
	a) Inherently limited output		N/A
	b) Impedance limited output		N/A
	c) Regulating network limited output	A regulating network limits the output in compliance with table Q.1 both under normal operating conditions and after any single fault.	P
	d) Overcurrent protective device limited output		N/A
	e) IC current limiter complying with G.9		N/A
Q.1.2	Test method and compliance	See appended table Annex Q.1	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Current rating of overcurrent protective device (A)		N/A
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A)		N/A
	Current limiting method		—
R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General	No such consideration.	N/A
R.2	Test setup		N/A
	Overcurrent protective device for test		—
R.3	Test method		N/A
	Cord/cable used for test		—
R.4	Compliance		N/A
S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material		—
	Wall thickness (mm)		—
	Conditioning (°C)		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material		—
	Wall thickness (mm)		—
	Conditioning (°C)		—
S.3	Flammability test for the bottom of a fire enclosure		N/A
S.3.1	Mounting of samples		N/A
S.3.2	Test method and compliance		N/A
	Mounting of samples		—
	Wall thickness (mm)		—
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosure materials of equipment with a steady state power exceeding 4 000 W		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Samples, material		—
	Wall thickness (mm).....		—
	Conditioning (°C).....		—
T	MECHANICAL STRENGTH TESTS		P
T.1	General		P
T.2	Steady force test, 10 N	(See appended table T.2, T.3, T.4, T.5)	P
T.3	Steady force test, 30 N		N/A
T.4	Steady force test, 100 N		N/A
T.5	Steady force test, 250 N	(See appended table T.2, T.3, T.4, T.5)	P
T.6	Enclosure impact test	(See appended table T.6, T9)	P
	Fall test	A 500 g steel sphere ball fell freely from rest through a vertical distance of 1300 mm onto the sample.	P
	Swing test		P
T.7	Drop test		N/A
T.8	Stress relief test	(See appended table T.8)	P
T.9	Glass Impact Test.....	No such glass is provided within the equipment.	N/A
T.10	Glass fragmentation test		N/A
	Number of particles counted		N/A
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm)		N/A
U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION		N/A
U.1	General		N/A
	Instructional safeguard :		N/A
U.2	Test method and compliance for non-intrinsically protected CRTs		N/A
U.3	Protective screen		N/A
V	DETERMINATION OF ACCESSIBLE PARTS		P
V.1	Accessible parts of equipment		P
V.1.1	General		P
V.1.2	Surfaces and openings tested with jointed test probes		P
V.1.3	Openings tested with straight unjointed test probes		P
V.1.4	Plugs, jacks, connectors tested with blunt probe		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
V.1.5	Slot openings tested with wedge probe		N/A
V.1.6	Terminals tested with rigid test wire		N/A
V.2	Accessible part criterion		P
X	ALTERNATIVE METHOD FOR DETERMINING CLEARANCES FOR INSULATION IN CIRCUITS CONNECTED TO AN AC MAINS NOT EXCEEDING 420 V PEAK (300 V RMS)		N/A
	Clearance :	(See appended table X)	N/A
Y	CONSTRUCTION REQUIREMENTS FOR OUTDOOR ENCLOSURES		N/A
Y.1	General		N/A
Y.2	Resistance to UV radiation		N/A
Y.3	Resistance to corrosion		N/A
Y.3	Resistance to corrosion		N/A
Y.3.1	Metallic parts of outdoor enclosures are resistant to effects of water-borne contaminants by..... :		N/A
Y.3.2	Test apparatus		N/A
Y.3.3	Water – saturated sulphur dioxide atmosphere		N/A
Y.3.4	Test procedure :		N/A
Y.3.5	Compliance		N/A
Y.4	Gaskets		N/A
Y.4.1	General		N/A
Y.4.2	Gasket tests		N/A
Y.4.3	Tensile strength and elongation tests		N/A
	Alternative test methods :		N/A
Y.4.4	Compression test		N/A
Y.4.5	Oil resistance		N/A
Y.4.6	Securing means	(See Annex P.4)	N/A
Y.5	Protection of equipment within an outdoor enclosure		N/A
Y.5.1	General		N/A
Y.5.2	Protection from moisture		N/A
	Relevant tests of IEC 60529 or Y.5.3..... :		N/A
Y.5.3	Water spray test		N/A
Y.5.4	Protection from plants and vermin		N/A
Y.5.5	Protection from excessive dust		N/A
Y.5.5.1	General		N/A
Y.5.5.2	IP5X equipment		N/A
Y.5.5.3	IP6X equipment		N/A
Y.6	Mechanical strength of enclosures		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Y.6.1	General		N/A
Y.6.2	Impact test.....:	(See Table T.6)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.2	TABLE: Classification of electrical energy sources						P
Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters				ES Class
			U (V)	I (mA)	Type ¹⁾	Additional Info ²⁾	
264Va.c. 60Hz	Primary circuits supplied by a.c. mains supply	Normal	264Vrms	--	SS	60 Hz	ES3
		Abnormal	--	--	--	--	
		Single fault	--	--	--	--	
264Va.c. 60Hz	T1 pin 8,9 to 10,11	Normal:	304Vpeak	--	SS	32.4k	ES3
		Abnormal:	304Vpeak	--	SS	32.4k	
		Single fault: T1 pin 8,9 to 10,11 SC	0	--	--	--	
264Va.c. 60Hz	T1 pin 8,9 to 10,11 output after D3	Normal:	54.24Vdc	--	SS	DC	ES1
		Abnormal:	54.24Vdc	--	SS	DC	
		Single fault: D3 SC	0	--	--	--	
264Va.c. 60Hz	POE port	Normal	54.09Vdc	--	SS	DC	ES1
		Abnormal-overload	54.09Vdc	--	SS	DC	
		Single fault: SC/OC (Refer to fault condition on table B.3, B.4, output shutdown)	See B.3, B.4 for details	--	--	--	
		Single fault: SC/OC (Refer to fault condition on table B.3, B.4, fuse open)	See B.3, B.4 for details	--	--	--	
264Va.c. 60Hz	Signal in port	Normal	0	--	--	--	ES1
		Abnormal	0	--	--	--	
		Single fault: SC/OC (Refer to fault condition on table B.3, B.4, output shutdown)	See B.3, B.4 for details	--	--	--	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

		Single fault: SC/OC (Refer to fault condition on table B.3, B.4, fuse open)	See B.3, B.4 for details	--	--	--
--	--	--	--------------------------------	----	----	----

Supplementary information:

1) Type: Steady state (SS), Capacitance (CP), Single pulse (SP), Repetitive pulses (RP), etc.

2) Additional Info: Frequency, Pulse duration, Pulse off time, Capacitance value, etc.

5.4.1.8	TABLE: Working voltage measurement				P
Location	RMS voltage (V)	Peak voltage (V)	Frequency (Hz)	Comments	
T1 Pin 1-8,9	225	632	12.41k	Max. V _{peak} of T1	
T1 Pin 3-8,9	233	416	12.41k	Max. V _{rms} of T1	
T1 Pin 5-8,9	212	408	12.41k	--	
T1 Pin 6-8,9	228	408	12.41k	--	
T1 Pin 1-10,11	217	348	12.41k	--	
T1 Pin 3-10,11	222	360	12.41k	--	
T1 Pin 5-10,11	227	480	12.41k	--	
T1 Pin 6-10,11	223	440	12.41k	--	
U2 Pin 1-3	215	352	60	--	
U2 Pin 1-4	215	352	60	--	
U2 Pin 2-3	241	368	60	--	
U2 Pin 2-4	216	352	60	--	
CY1 primary to secondary	237	400	60	--	
CY2 primary to secondary	7.01	32	4.68	--	
CY3 primary to secondary	224	368	60	--	
Supplementary information:					
Test voltage: 240Vac / 60Hz					

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics			N/A
Method.....:			ISO 306 / B50	—
Object/ Part No./Material	Manufacturer/trademark	Thickness (mm)	T softening (°C)	
--	--	--	--	
--	--	--	--	
Supplementary information:				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

--

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics				N/A
Allowed impression diameter (mm): ≤ 2 mm					—
Object/Part No./Material	Manufacturer/trademark	Thickness (mm)	Test temperature (°C)	Impression diameter (mm)	
--	--	--	--	--	
--	--	--	--	--	
Supplementary information:					

5.4.2, 5.4.3	TABLE: Minimum Clearances/Creepage distance							P
Clearance (cl) and creepage distance (cr) at/of/between:	U _p (V)	U _{rms} (V)	Freq ¹⁾ (Hz)	Required cl (mm)	cl (mm)	E.S. ²⁾ (V)	Required cr (mm)	cr (mm)
Basic:								
Line and Neutral before fuse F1 on PCB trace(BI)	420	250	<30K	1.5	6.2	--	2.5	6.2
Different polarity of fuse F1 on PCB trace(BI)	420	250	<30K	1.5	4.6	--	2.5	4.6
Primary to earth trace under CY1, CY2 (BI)	420	250	<30K	1.5	3.9	--	2.5	3.9
T1 core to primary pins (BI)	632	250	<30K	1.5	2.8	--	2.5	2.8
T1 core to secondary pins (SI)	632	250	<30K	1.5	3.7	--	2.5	3.7
Reinforced:								
PCB trace under U2(RI)	420	250	<30K	3.0	6.1	--	5.0	6.1
Primary to secondary trace under CY3 (RI)	420	250	<30K	3.0	6.2	--	5.0	6.2
Primary trace to secondary trace under T1 (RI)	632	250	<30K	3.0	6.2	--	5.0	6.2
T1 Primary pin to secondary pin (RI)	632	250	<30K	3.0	6.2	--	5.0	6.2
Primary trace of heat sink S1 to function earth trace (RI)	420	250	<30K	3.0	3.9	--	5.0	5.2

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Primary trace to outside of enclosure (RI)	420	250	<30K	3.0	5.8	--	5.0	5.8
Primary heat sink S1(10N applied) to outside of enclosure (RI)	420	250	<30K	3.0	6.4	--	5.0	6.4

Supplementary information:

“BI” – Basic insulation; “SI” – Supplementary insulation; “RI” – Reinforced insulation

1) Only for frequency above 30 kHz

2) Complete Electric Strength voltage (E.S. (V) when 5.4.2.4 applied)

3) Material group: IIIa/IIIb

1. Triple insulated wire used as all winding of T1. The Core of T1 is considered as intermeddle part.

2. The components: AC inlet, Fuse F1 body, RV1, E-cap E1, L1 and CX1 are additionally fixed by glue.

3. Unless otherwise specified, the worst conditions of Cl. & Cr. in above mentioned locations have been considered and listed.

5.4.4.2	TABLE: Minimum distance through insulation				P
Distance through insulation (DTI) at/of	Peak voltage (V)	Insulation	Required DTI (mm)	Measured DTI (mm)	
Plastic Enclosure	420	Reinforced	Min.0.4	1)	
Bobbin used for transformer (T1)	632	Reinforced	Min.0.4	1)	
Supplementary information:					
1) See appended table 4.1.2 for details.					

5.4.4.9	TABLE: Solid insulation at frequencies >30 kHz					N/A
Insulation material	E_P	Frequency (kHz)	K_R	Thickness d (mm)	Insulation	V_{PW} (Vpk)
--	--	--	--	--	--	--
Supplementary information:						

5.4.9	TABLE: Electric strength tests			P
Test voltage applied between:	Voltage shape (Surge, Impulse, AC, DC, etc.)	Test voltage (V)	Breakdown Yes / No	
Basic/supplementary:				
L and N of input (with fuse opened)	DC	2500	No	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
L&N to earth pin	DC	2500	No
T1 core to primary	DC	2500	No
T1 core to secondary	DC	2500	No
Reinforced:			
L/N to plastic enclosure (Enclosure wrapped with copper foil)	DC	4000	No
L/N to output terminal	DC	4000	No
T1 primary to secondary	DC	4000	No
Supplementary information:			
Core of transformer T1 were considered as intermiddle part. Test after humidity treatment, heating test, and for unit primary to secondary, primary to plastic enclosure electric strength after each fault condition test. Test were performed on product with each source listed in table 4.1.2.			
The DC voltage source was performed on all testing once in forward and once in reverse.			

5.5.2.2	TABLE: Stored discharge on capacitors					P
Location	Supply voltage (V)	Operating and fault condition ¹⁾	Switch position	Measured voltage (Vpk)	ES Class	
L to N	264Vac, 60Hz	Normal	--	4V	ES1	
L to N	264Vac, 60Hz	Fault (R3 open)	--	12V	ES1	
Supplementary information:						
X-capacitors installed for testing: CX1 = 0.22uF±10%						
[X] bleeding resistor rating: R3=R4=R5=R6=5.6M ohm						
[] ICX:						
1) Normal operating condition (e.g., normal operation, or open fuse), SC= short circuit, OC= open circuit						

5.6.6	TABLE: Resistance of protective conductors and terminations				P
Location	Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)	
From earthing pin of inlet to terminal of earthing wire soldered to PCB	32	2	0.35	0.011	
From earthing pin of inlet to terminal of earthing wire soldered to PCB	40	2	0.48	0.012	
From earthing pin of inlet to earthed metal enclosure which surround the output connector	32	2	0.28	0.009	
From earthing pin of inlet to earthed metal enclosure which surround the output connector	40	2	0.56	0.014	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

5.7.4	TABLE: Unearthed accessible parts					P
Location	Operating and fault conditions	Supply Voltage (V)	Parameters			ES class
			Voltage (V _{rms} or V _{pk})	Current (A _{rms} or A _{pk})	Freq. (Hz)	
L/N to accessible Terminal	Normal	264Va.c. 60Hz	--	0.608mApk	--	ES1
	Abnormal: output overload	264Va.c. 60Hz	--	See B.3, B.4 for details	--	
	Single fault -- (Fault condition on table B.3, B.4, output shutdown)	264Va.c. 60Hz	--	See B.3, B.4 for details	--	
	Single fault: (Fault condition on table B.3, B.4, fuse open)	264Va.c. 60Hz	--	See B.3, B.4 for details	--	
L/N to plastic enclosure with metal foil	Normal	264Va.c. 60Hz	--	0.080mApk	--	ES1
	Abnormal: output overload	264Va.c. 60Hz	--	See B.3, B.4 for details	--	
	Single fault -- (Fault condition on table B.3, B.4, output shutdown)	264Va.c. 60Hz	--	See B.3, B.4 for details	--	
	Single fault: (Fault condition on table B.3, B.4, fuse open)	264Va.c. 60Hz	--	See B.3, B.4 for details	--	
Supplementary information:						
Abbreviation: SC= short circuit; OC= open circuit						

5.7.5	TABLE: Earthed accessible conductive part			P
Supply voltage (V)	264Va.c. 60Hz			—
Phase(s)	[X] Single Phase; [] Three Phase: [] Delta [] Wye			
Power Distribution System	[X] TN [] TT [] IT			
Location	Fault Condition No in IEC 60990 clause 6.2.2	Touch current (mA)	Comment	
Earth terminal	1 (e open, normal and reverse polarity p)	1.58mApk	--	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary Information:

5.8	TABLE: Backfeed safeguard in battery backed up supplies					N/A
Location	Supply voltage (V)	Operating and fault condition	Time (s)	Open-circuit voltage (V)	Touch current (A)	ES Class
--	--	--	--	--	--	--
--	--	--	--	--	--	--

Supplementary information:

Abbreviation: SC= short circuit, OC= open circuit

6.2.2	TABLE: Power source circuit classifications					P
Location	Operating and fault condition	Voltage (V)	Current (A)	Max. Power ¹⁾ (W)	Time (S)	PS class
Primary circuit	Normal operation	--	--	--	3s	PS3 (declared)
		--	--	--	5s	
T1 pin 8,9 to 10,11 output after D3	Normal operation	53.7	1.22	65.51	3s	PS2
		53.7	1.22	65.51	5s	
	U2 Pin 1-2 SC	0	0	0	3s	PS1
		--	--	--	5s	
	U2 Pin 3-4 SC	0	0	0	3s	PS1
		--	--	--	5s	
	U2 Pin 1 OC	0	0	0	3s	PS1
		--	--	--	5s	
	U2 Pin 3 OC	0	0	0	3s	PS1
		--	--	--	5s	
	R20 SC	0	0	0	3s	PS1
		--	--	--	5s	
	D8 SC	0	0	0	3s	PS1
		--	--	--	5s	
U1 pin 2-5 SC	0	0	0	3s	PS1	
	--	--	--	5s		
POE port	Normal operation	53.6V	0.61	32.70	3s	PS2
		53.6V	0.61	32.70	5s	
	U2 Pin 1-2 SC	0	0	0	3s	PS1
		--	--	--	5s	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

	U2 Pin 3-4 SC	0	0	0	3s	PS1	
		--	--	--	5s		
	U2 Pin 1 OC	0	0	0	3s	PS1	
		--	--	--	5s		
	U2 Pin 3 OC	0	0	0	3s	PS1	
		--	--	--	5s		
	R20 SC	0	0	0	3s	PS1	
		--	--	--	5s		
	D8 SC	0	0	0	3s	PS1	
		--	--	--	5s		
	U1 pin 2-5 SC	0	0	0	3s	PS1	
		--	--	--	5s		
	Signal in port	Normal operation	0	0	0	3s	PS1
			--	--	--	5s	
U2 Pin 1-2 SC		0	0	0	3s	PS1	
		--	--	--	5s		
U2 Pin 3-4 SC		0	0	0	3s	PS1	
		--	--	--	5s		
U2 Pin 1 OC		0	0	0	3s	PS1	
		--	--	--	5s		
U2 Pin 3 OC		0	0	0	3s	PS1	
		--	--	--	5s		
R20 SC		0	0	0	3s	PS1	
		--	--	--	5s		
D8 SC		0	0	0	3s	PS1	
		--	--	--	5s		
U1 pin 2-5 SC		0	0	0	3s	PS1	
		--	--	--	5s		

Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit

1) Measured after 3 s for PS1 and measured after 5 s for PS2 and PS3.

6.2.3.1	TABLE: Determination of Arcing PIS				P
Location	Open circuit voltage after 3 s (Vpk)	Measured r.m.s current (A)	Calculated value	Arcing PIS? Yes / No	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Primary circuits and secondary circuit / parts except for Signal in port	--	--	--	Yes (Declaration)
Supplementary information:				
An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (Vp) and normal operating condition rms current (Irms) is greater than 15.				

6.2.3.2	TABLE: Determination of resistive PIS			P
Location	Operating and fault condition	Dissipate power (W)	Arcing PIS? Yes / No	
Primary circuits and secondary circuit / parts except for Signal in port	--	--	Yes (Declaration)	
Supplementary information:				
A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter.				
If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification.				
A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, or (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC				

8.5.5	TABLE: High pressure lamp				N/A
Lamp manufacturer	Lamp type	Explosion method	Longest axis of glass particle (mm)	Particle found beyond 1 m Yes / No	
--	--	--	--	--	
--	--	--	--	--	
Supplementary information:					

9.6	TABLE: Temperature measurements for wireless power transmitters							N/A
Supply voltage (V)..... :							---	
Max. transmit power of transmitter (W)..... :							---	
Foreign objects	w/o receiver and direct contact		with receiver and direct contact		with receiver and at distance of 2 mm		with receiver and at distance of 5 mm	
	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

5.4.1.4, 9.3, B.1.5, B.2.6	TABLE: Temperature measurements				P
Supply voltage (V)..... :	90V/60Hz		264V/60Hz		—
Ambient temperature during test T_{amb} (°C)..... :	--	--	--	--	—
Maximum measured temperature T of part/at:	T (°C)				Allowed T_{max} (°C)
--	Label up	Label down	Label up	Label down	--
AC inlet (inside)	62.2	65.1	53.2	52.5	70
Y-cap (CY2)	95.6	109.8	67.1	62.4	125
Varistor (RV1)	71.4	75.3	70.9	65.3	125
E-cap (E1)	77.3	73.5	78.6	79.8	105
L1 winding	113.3	109.5	83.8	83.1	130
X-cap (CX1)	91.0	97.1	77.6	75.4	100
PCB near Q1 under heat sink S1	97.8	93.5	92.9	94.0	130
PCB near D1	96.6	98.7	90.9	85.9	130
U2 body	80.4	78.5	70.4	75.2	100
T1 winding	95.6	98.0	84.7	80.4	110
T1 core	95.2	97.4	82.5	76.2	110
Y-cap (CY3)	83.2	79.9	77.7	83.3	125
PCB near D3	92.9	94.3	84.2	81.3	130
E-cap (E3)	81.6	83.5	72.3	69.0	105
PCB near DP1	108.6	107.4	81.5	81.6	130
Enclosure inside near T1	72.7	70.3	64.1	57.8	85
Ambient(°C)	40.0	40.0	40.0	40.0	--
Accessible parts					
AC inlet surface	48.1	53.8	35.6	32.1	77*
POE output terminal surface	37.6	40.7	36.6	37.9	60*
Plastic enclosure outside near T1	58.3	58.8	52.2	47.0	77*
Ambient(°C)	25.0	25.0	25.0	25.0	--

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:							
* Temperature limit for TS1 of accessible enclosure according to Table 38 to be measured at normal ambient temperature.							
Note 1: The apparatus was submitted and evaluated for maximum manufacturer's recommended ambient (T _{ma}) of 40 °C.							
Note 2: The temperatures were measured under the worst-case normal mode defined in table B.2.5.							
Note 3: Temperature limits are calculated as follows:							
Winding components providing safety isolation: Class B → T _{max} = 120 – 10 = 110 °C							
Temperature T of winding:	t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	Allowed T _{max} (°C)	Insulation class
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
Supplementary information:							

B.2.5 TABLE: Input test								P
U (V)	Hz	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
90	50	0.660	--	37.3	--	F1	0.660	Max. normal load (54Vdc, 0.6A)
100	50	0.594	0.7	37.1	--	F1	0.594	
240	50	0.294	0.7	36.9	--	F1	0.294	
264	50	0.273	--	37.4	--	F1	0.273	
90	60	0.699	--	37.7	--	F1	0.699	
100	60	0.634	0.7	37.3	--	F1	0.634	
240	60	0.320	0.7	36.8	--	F1	0.320	
264	60	0.305	--	37.6	--	F1	0.305	
Supplementary information:								
The maximum measured current under rated voltage did not exceed 110% of the rated current.								

B.3, B.4 TABLE: Abnormal operating and fault condition tests							P
Ambient temperature T _{amb} (°C)					25°C, if not specified		—
Power source for EUT: Manufacturer, model/type, outputrating...:					--		—
Component No.	Condition	Supply voltage (V)	Test time	Fuse no.	Fuse current (A)	Observation	
Output	O-L	264	2hr 42min	F1	0.305 to 0.308 to 0.023	Unit output normal working. Max. unit output overload current was 0.614A, when increased to 0.62A, unit	

IEC 62368-1						
Clause	Requirement + Test			Result - Remark	Verdict	
						<p>output shut down, no damaged, no hazards.</p> <p>T1 winding: 86.5°C</p> <p>T1 core: 81.8°C</p> <p>Ambient : 40.0°C</p> <p>AC inlet surface: 38.0°C</p> <p>Output terminal surface: 38.9°C</p> <p>Enclosure outside near T1: 58.9°C</p> <p>Ambient: 25.0°C</p> <p>Output voltage:</p> <p>Signal in port: 0Vdc</p> <p>POE port voltage: 54.09Vdc</p> <p>Touch current:</p> <p>L/N to accessible Terminal:0.608Vpeak</p> <p>L/N to plastic enclosure with metal foil: 0.080Vpeak</p>
Transformer output load with E3	O-L	264	3hr 20min	F1	0.305 to 0.462 to 0.020	<p>Unit normal working. Max T1 overload current was 1.22A, when load to 1.23A, unit shutdown immediately, max. temperature was obtained, no damage, no hazard</p> <p>T1 winding: 103.7°C</p> <p>T1 core: 100.3°C</p> <p>Ambient: 40.0°C</p> <p>AC inlet surface: 41.2°C</p> <p>Output terminal surface: 42.3°C</p> <p>Enclosure outside near T1: 60.97°C</p> <p>Ambient: 25.0°C</p> <p>Output voltage:</p> <p>Signal in port: 0Vdc</p> <p>POE port voltage: 54.09Vdc</p> <p>Touch current:</p> <p>L/N to accessible Terminal:0.608Vpeak</p> <p>L/N to plastic enclosure with metal foil: 0.080Vpeak</p>

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
DP1 pin 1-3	S-C	264V	1s	F1	0	Fuse F1 opened immediately. Repeat three times, the same result was obtained. No hazard. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.610Vpeak L/N to plastic enclosure with metal foil: 0.084Vpeak
DP1 pin 2-4	S-C	264V	1s	F1	0	Fuse F1 opened immediately. Repeat three times, the same result was obtained. No hazard. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.610Vpeak L/N to plastic enclosure with metal foil: 0.084Vpeak
E1	S-C	264V	1s	F1	0	Fuse F1 opened immediately. Repeat three times, the same result was obtained. No hazard. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.610Vpeak L/N to plastic enclosure with metal foil: 0.084Vpeak
R15	S-C	264V	1s	F1	0	Fuse F1 opened immediately. Repeat three times, the same result was obtained. No hazard. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
						Touch current: L/N to accessible Terminal:0.610Vpeak L/N to plastic enclosure with metal foil: 0.084Vpeak
D1	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
Q1 pin 1-2	S-C	264V	1s	F1	0	Fuse F1 opened immediately. Repeat three times, the same result was obtained. No hazard. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.610Vpeak L/N to plastic enclosure with metal foil: 0.084Vpeak
Q1 pin 1-3	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
Q1 pin 2-3	S-C	264V	1s	F1	0	Fuse F1 opened immediately. Repeat three times, the same result was obtained. No hazard. Output voltage: Signal in port: 0Vdc

IEC 62368-1						
Clause	Requirement + Test	Result - Remark			Verdict	
						POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.610Vpeak L/N to plastic enclosure with metal foil: 0.084Vpeak
U1 Pin 2-5	S-C	264V	1s	F1	0	Fuse F1 opened immediately. Repeat three times, the same result was obtained. No hazard. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.610Vpeak L/N to plastic enclosure with metal foil: 0.084Vpeak
U1 Pin 5-6	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
T1 Pin 1-5	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
T1 Pin 3-6	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
						POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
T1 Pin 8,9-10,11	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
D3	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
C5	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
E3	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc

IEC 62368-1						
Clause	Requirement + Test	Result - Remark			Verdict	
						Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
R29	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
U2 Pin1	O-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
U2 Pin3	O-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
U2 Pin1-2	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
						Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
U2 Pin3-4	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
D3	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
E3	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak
R34	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

						metal foil: 0.082Vpeak
Output	S-C	264V	10min	F1	0.011	Unit shut down immediately, No damage. No hazards. Output voltage: Signal in port: 0Vdc POE port voltage: 0Vdc Touch current: L/N to accessible Terminal:0.608Vpeak L/N to plastic enclosure with metal foil: 0.082Vpeak

Supplementary information:

Test table is provided to record abnormal and fault conditions for all applicable energy sources including Thermal burn injury. Column "Abnormal/Fault." Specify if test condition by indicating "Abnormal" then the condition for a Clause B.3 test or "Single Fault" then the condition for Clause B.4.

1. S-C: Short-circuited; O-C: Open-circuited; O-L: Overloaded.
2. The test result shown all safeguards remained effective and didn't lead to a single fault condition during abnormal operating condition; besides, all safeguards complied with applicable requirements in this standard after restoration of normal operating conditions.
3. The test result showed no Class 1 or 2 energy source become Class 3 level during and after single fault condition.
4. Transformer winding and core: limit temperature is 175 °C -10 = 165 °C, Enclosure outside: TS2=87°C. Metal part outside: TS2=70°C.

M.3	TABLE: Protection circuits for batteries provided within the equipment						N/A
Is it possible to install the battery in a reverse polarity position?						---	
Equipment Specification	Charging						
	Voltage (V)			Current (A)			
	--			--			
Manufacturer/type	Battery specification						
	Non-rechargeable batteries		Rechargeable batteries				
	Discharging current (A)	Unintentional charging current (A)	Charging		Discharging current (A)	Reverse charging current (A)	
			Voltage (V)	Current (A)			
	--	--	--	--	--	--	
--	--	--	--	--	--		
Note: The tests of M.3.2 are applicable only when above appropriate data is not available.							
Specified battery temperature (°C)							
Component No.	Fault condition	Charge/discharge mode	Test time	Temp. (°C)	Current (A)	Voltage (V)	Observation

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit NL= no chemical leakage; NS= no spillage of liquid; NE= no explosion; NF= no emission of flame or expulsion of molten metal.

M.4.2	TABLE: Charging safeguards for equipment containing a secondary lithium battery					N/A
Maximum specified charging voltage (V)						---
Maximum specified charging current (A)						---
Highest specified charging temperature (°C)						
Lowest specified charging temperature (°C)						
Battery manufacturer/type	Operating and fault condition	Measurement			Observation	
		Charging voltage (V)	Charging current (A)	Temp. (°C)		
--	--	--	--	--	--	
--	--	--	--	--	--	
Supplementary information:						
Abbreviation: SC= short circuit; OC= open circuit; MSCV= maximum specified charging voltage; MSCC= maximum specified charging current; HSCT= highest specified charging temperature; LSCT= lowest specified charging temperature						

Q.1	TABLE: Circuits intended for interconnection with building wiring (LPS)						P
Output Circuit	Condition	U _{oc} (V)	Time (s)	I _{sc} (A)		S (VA)	
				Meas.	Limit	Meas.	Limit
POE port	Normal condition	54.09	5s	0.61	2.7*	32.70	100
	U2 Pin 1 to 2 SC	0	5s	0	8.0	0	100
	U2 Pin 3 to 4 SC	0	5s	0	8.0	0	100
	U2 Pin 1 OC	0	5s	0	8.0	0	100
	U2 Pin 3 OC	0	5s	0	8.0	0	100
	R20 SC	0	5s	0	8.0	0	100
	D8 SC	0	5s	0	8.0	0	100
	U1 pin 2-5 SC	0	5s	0	8.0	0	100
Supplementary Information:							
*When U _{oc} of output over 30Vdc and under 60Vdc, the limit of I _{sc} should be ≤ 150/U _{oc} ..							

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

T.2, T.3, T.4, T.5		TABLE: Steady force test					P
Location/Part	Material	Thickness (mm)	Probe	Force (N)	Test Duration (s)	Observation	
Enclosure top (T.5)	Plastic	1)	--	250	5	Enclosure remained intact, no crack/ opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Enclosure top, closed to transformer (T.5)	Plastic	1)	--	250	5	Enclosure remained intact, no crack/ opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Enclosure bottom, closed to transformer (T.5)	Plastic	1)	--	250	5	Enclosure remained intact, no crack/ opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Internal components near the gap between primary and secondary (T.2)	--	--	--	10	5	No insulation breakdown. No reduction the clearances and creepage distances	

Supplementary information:

1) See appended table 4.1.2

Each source of enclosure in table 4.1.2 was applied and passed the relevant tests.

T.6, T.9		TABLE: Impact test			P
Location/Part	Material	Thickness (mm)	Height (mm)	Observation	
External enclosure	Plastic	1)	1300	No energy source exceed ES1 can be accessed	

Supplementary information:

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

1) See appended table 4.1.2

Each source of enclosure in table 4.1.2 was applied and passed the relevant tests.

T.7	TABLE: Drop test				N/A
Location/Part	Material	Thickness (mm)	Height (mm)	Observation	
--	--	--	--	--	
Supplementary information:					

T.8	TABLE: Stress relief test					P
Location/Part	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation	
Enclosure	Plastics	1)	83	7	Enclosure remained intact, no cracking/opening developed in the enclosure joint. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Supplementary information:						
1). See appended table 4.1.2.						
Each source of enclosure in table 4.1.2 was applied and passed the relevant tests.						

X	TABLE: Alternative method for determining minimum clearances distances			N/A
Clearance distanced between:	Peak of working voltage (V)	Required cl (mm)	Measured cl (mm)	
--	--	--	--	
--	--	--	--	
Supplementary information:				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.1.2	TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
Enclosure	FORMOSA CHEMICALS & FIBRE CORP PLASTICS DIV	AC310(+)	V-0, 85°C, Min.1.5mm	UL 94	UL E162823	
Detachable Power cord set (KC type)	Ningbo Yuxin Electrical Appliance Co., Ltd.	Plug: YX03	16A, 250V~	KC 60884-1 KS C 8305	KTC HU04044-8005D	
	Ningbo Yuxin Electrical Appliance Co., Ltd.	Cord: H05VV-F	2*0.75mm ²	KC 60227-5	KTC HU01026-6001D	
	Ningbo Yuxin Electrical Appliance Co., Ltd.	Connector: XT3	10A, 250V~	K60320-1	KTC HU04044-8004C	
PCB	Interchangeable	Interchangeable	V-1 or better, min. 130°C	UL 94, UL 796	UL	
AC Inlet (JK1)	Dongguan HUACONN Electronics Co., Ltd	HC-99 Series (For VDE) HC-99 (For UL)	10A, 250Vac, 70°C, standard sheet C14	IEC/EN 60320-1 IEC/EN 60320-3 UL 60320-1	VDE 40032734 UL E340249	
(Alternative)	SHENZHEN KANGYONGDA ELECTRONICS CO LTD	DE-14-Serie(s) (For VDE) DE-14 (For UL)	10A, 250Vac, 70°C, standard sheet C14	IEC/EN 60320-1 IEC/EN 60320-3 UL 60320-1	VDE 40036820 UL E362692	
(Alternative)	Guangdong Boytall Electronics Co., Ltd	BT-14 (-1A, -1B, -1C, -1D, -1E, -2A, -2B, -2C) (For TUV) BT-14-1X (For UL)	10A, 250Vac, 70°C, standard sheet C14	IEC/EN 60320-1 IEC/EN 60320-3 UL 60320-1	TUV R 50502150 UL E519256	
(Alternative)	ZHE JIANG BEI ER JIA ELECTRONIC CO LTD	For VDE: ST-A01-003J, ST-A01-003K, For UL: ST-A03 Series	10A, 250Vac, 70°C, standard sheet C14	IEC/EN 60320-1 IEC/EN 60320-3 UL 60320-1	VDE 40013388 UL E225980	
Fuse (F1)	DONGGUAN HONGDA ELECTRONIC TECHNOLOGY CO LTD	31FD (For VDE) 31F (For UL)	F2AL 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 UL 248-1, UL 248-14	VDE 40033985 UL E318938	

IEC 62368-1					
Clause	Requirement + Test	Result - Remark		Verdict	
(Alternative)	Dongguan Chevron Electronic Technology Co., Ltd.	3GT	F2AL 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 UL 248-1, UL 248-14	VDE 40036523 UL E358589
(Alternative)	DONGGUAN REOMAX ELECTRONICS TECHNOLOGY CO LTD	FBP	F2AL 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 UL 248-1, UL 248-14	VDE 40034581 UL E340427
Varistor (RV1)	HONGZHI ENTERPRISES LTD	HEL10D681K (For VDE) HEL10D681K# T (For UL)	Min. 420Vac, 560Vdc, min. 125°C (Test for 6KV/3KA combination pulse), coating V-0	IEC 61051-1, IEC 61051-2, UL 1449	VDE 40037512 UL E324904
(Alternative)	CERGLASS MFG INC	10D681K	Min. 420Vac, 560Vdc, min. 125°C (Test for 6KV/3KA combination pulse), coating V-0	IEC 61051-1, IEC 61051-2, UL 1449	VDE 40028836 UL E317616
(Alternative)	WALSIN TECHNOLOGY CORP	VZ10D681K	Min. 420Vac, 560Vdc, min. 125°C (Test for 6KV/3KA combination pulse), coating V-0	IEC 61051-1, IEC 61051-2, UL 1449	VDE 40010090 UL E309297
X-Capacitors (CX1)	TENTA ELECTRIC INDUSTRIAL CO LTD	MEX	Max. 0.22 uF, Min. 250Vac, 100°C, X2 type	IEC/EN/UL 60384-14	VDE 119119 UL E222911
(Alternative)	GUANGDONG JURCC ELECTRONICS CO LTD	MPX/MKP (For VDE) MPX/MKP # (For UL)	Max. 0,22uF, Min. 275Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE 40034920 UL E343072
(Alternative)	GUANGDONG CHAMPION ELECTRONIC TECHNOLOGY CO LTD	MPX Series (For VDE) MPX (For UL)	Max. 0.22uF, Min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE 40044148 UL E477525
Opto-coupler (U2)	Shenzhen Orient Components Co. Ltd.	ORPC817 x (For VDE) ORPC817x (For UL)	Dti≥0.4mm, Ext.cr ≥7.6mm, Ext.cl ≥7.6mm, 125°C	IEC/EN 60747-5-5 UL 1577	VDE 40029733 UL E323844

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
(Alternative)	Bright Led Electronics Corp.	BPC-817 (A;B;C;D;L) (For VDE) BPC-817XXXXXX* (For UL)	Dti≥0.4mm, Ext.cr ≥7.6mm, Ext.cl ≥7.6mm, 110°C	IEC/EN 60747-5-5 UL 1577	VDE 40007240 UL E236324
(Alternative)	Hubei Xingbao Electronics Co Ltd	JC817 (A,B,C,D) (For VDE) JC817 (For UL)	Dti≥0.4mm, Ext.cr ≥7.6mm, Ext.cl ≥7.6mm, 100°C	IEC/EN 60747-5-5 UL 1577	VDE 40037109 UL E341140
(Alternative)	EVERLIGHT ELECTRONICS CO LTD	EL817 (blank;M;S;S1;S2;M2) (blank;V) (For VDE) EL817 (For UL)	Dti≥0.4mm, Ext.cr ≥7.6mm, Ext.cl ≥7.6mm, 110°C	IEC/EN 60747-5-5 UL 1577	VDE 132249 UL E214129
Bleeder Resistor (R3, R4, R5, R6)	Interchangeable	Interchangeable	Each maximum 5.6Mohm, Min.1/4W	IEC/EN 62368-1	Test with appliance
Electrolytic Capacitor (E1)	Interchangeable	Interchangeable	Max. 47uF, Min. 400V, 105°C	IEC/EN 62368-1	Test with appliance
Rectifier bridge (DP1)	Interchangeable	Interchangeable	Min. 700V, min.2A.	IEC/EN 62368-1	Test with appliance
Transistor (Q1)	Interchangeable	Interchangeable	Min.650V Min.5A	IEC/EN 62368-1	Test with appliance
Current sensor resistor (R20)	Interchangeable	Interchangeable	Min. 0.5Ω, 1W	IEC/EN 62368-1	Test with appliance
White glue	Interchangeable	Interchangeable	Min. V-2	UL 94, UL 746C	UL
Thermistor (NTC1)	NANJING SHIHENG ELECTRONICS CO LTD	MF72-10D9 (For TUV) MF72 10D9 (For UL)	Min. 2A, min. 10ohm at 25°C	EN 60539-1 UL 1434 IEC 62368-1	TUV: R 50245892 UL E241319 Test with appliance
(Alternative)	SHANTOU HIGH-NEW TECHNOLOGY DEVELOPMNT ZONE SONGTIAN ENTERPRISE CO LTD	MF72 10D-9X (For VDE) 10D-9X (For UL)	Min. 2A, min. 10ohm at 25°C	EN 60539-1 UL 1434 IEC 62368-1	VDE 40050168 UL E474052 Test with appliance
(Alternative)	HONGZHI ENTERPRISES LTD	10D-9	Min. 2A, min. 10ohm at 25°C	UL 1434 IEC 62368-1	UL E319959 Test with appliance

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Y-Capacitor (CY1, CY2) (Y1 type)	JYA-NAY CO LTD	JN series (For TUV) JN (For UL)	Max.1000pF, Min. 250Vac, 125°C	IEC/EN/UL 60384-14	TUV: R 50232059 UL E201384
(Alternative)	South China Electronic Co Ltd	CY	Max.1000pF, Min. 250Vac, 125°C	IEC/EN/UL 60384-14	VDE 40045823 UL E492769
(Alternative)	Dongguan City Dafu Electronics Co Ltd	CT7 Y1 Series (For VDE) CT7 Y1 (For UL)	Max.1000pF, Min. 250Vac, 125°C	IEC/EN/UL 60384-14	VDE 40041523 UL E465278
Y-Capacitor (CY3) (Y1 type)	JYA-NAY CO LTD	JN series (For TUV) JN (For UL)	Max.2200pF, Min. 250Vac, 125°C	IEC/EN/UL 60384-14	TUV: R 50232059 UL E201384
(Alternative)	South China Electronic Co Ltd	CY	Max.2200pF, Min. 400Vac, 125°C	IEC/EN/UL 60384-14	VDE 40045823 UL E492769
(Alternative)	Dongguan City Dafu Electronics Co Ltd	CT7 Y1 Series (For VDE) CT7 Y1 (For UL)	Max.2200pF, Min. 250Vac, 125°C	IEC/EN/UL 60384-14	VDE 40041523 UL E465278
Line chock (L1)	Guangzhou Zhongyi Electronics Co., LTD	UF-9.8	130°C	IEC/EN 62368-1	Test with appliance
Transformer (T1)	SHENZHENSHI KAIFENG ELECTRONICS CO.,LTD	EE28-PSE801N-30W	Class B	Applicable part of IEC 62368-1 and evaluated according to IEC 60085	Test with appliance
Transformer (T1) (Alternative)	DONGGUAN CHIPSEN ELECTRONICS TECHNOLOGY LTD	EE28-PSE801N-30W	Class B	Applicable part of IEC 62368-1 and evaluated according to IEC 60085	Test with appliance
--Bobbin	CHANG CHUN PLASTICS CO LTD	T375J(G5)(G6), T200HF	Phenolic, V-0, 150°C, minimum thickness 0.75mm	UL 94	UL E59481
--(Alternative)	SUMITOMO BAKELITE CO LTD	PM-9630	Phenolic, V-0, 150°C, minimum thickness 0.70mm	UL 94	UL E41429
--Triple insulated wire	Furukawa Electric Co., Ltd.	TEX-BS	130°C	IEC/EN 62368-1 UL 2353	VDE 40020335 UL E206440

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
--(Alternative)	TOTOKU INC.	TIW-3 XX YY ZZ (For VDE) TIW-3X\$+ (For UL)	130°C	IEC/EN 62368-1 UL 2353	VDE 40051888 UL E166483
--Insulation tape	SUZHOU MAILADUONA ELECTRIC MATERIAL CO LTD	JY313#	130°C	UL 510A	UL E188295
--(Alternative)	3M COMPANY	1350-1 (b)	130°C	UL 510A	UL E17385
--(Alternative)	SHEN ZHEN XINHUAHUI ELECTRONIC MATERIALS CO LTD	HMT803, HMT804	130°C	UL 510A	UL E328315
--Tube	CHANGYUAN ELECTRONICS GROUP CO LTD	CB-TT-S	600V, 200°C, VW-1	UL 224	UL E180908
--(Alternative)	SHENZHEN WOER HEAT- SHRINKABLE MATERIAL CO LTD	WF	600V, 200°C, VW-1	UL 224	UL E203950
--Varnish	HANG CHEUNG COATINGS (HUIYANG) LTD	8562*	155°C	UL 1446	UL E200154
--(Alternative)	John C Dolph Co	BC-346A	155°C	UL 1446	UL E317427
--(Alternative)	Resonac Corporation	WP-2952F-2G	155°C	UL 1446	UL E72979
Material of output connector	Interchangeable	Interchangeable	Min V-1	IEC/EN 62368-1	Test with appliance
Supplementary information:					
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					
2) License available upon request.					

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 62368-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES (Audio/video, information and communication technology equipment - Part 1: Safety requirements)										
Differences according to : EN IEC 62368-1:2020+A11:2020										
Attachment Form No. : EU_GD_IEC62368_1E										
Attachment Originator : UL(Demko)										
Master Attachment : 2021-02-04										
Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.										
	CENELEC COMMON MODIFICATIONS (EN)	P								
	<p>Clause numbers in the cells that are shaded light grey are clause references in EN IEC 62368-1:2020+A11:2020. All other clause numbers in that column, except for those in the paragraph below, refers to IEC 62368-1:2018.</p> <p>Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2018 are prefixed "Z".</p>	P								
	<p>Add the following annexes:</p> <table border="0"> <tr> <td>Annex ZA (normative)</td> <td>Normative references to international publications with their corresponding European publications</td> </tr> <tr> <td>Annex ZB (normative)</td> <td>Special national conditions</td> </tr> <tr> <td>Annex ZC (informative)</td> <td>A-deviations</td> </tr> <tr> <td>Annex ZD (informative)</td> <td>IEC and CENELEC code designations for flexible cords</td> </tr> </table>	Annex ZA (normative)	Normative references to international publications with their corresponding European publications	Annex ZB (normative)	Special national conditions	Annex ZC (informative)	A-deviations	Annex ZD (informative)	IEC and CENELEC code designations for flexible cords	P
Annex ZA (normative)	Normative references to international publications with their corresponding European publications									
Annex ZB (normative)	Special national conditions									
Annex ZC (informative)	A-deviations									
Annex ZD (informative)	IEC and CENELEC code designations for flexible cords									
1	Modification to Clause 3 .	N/A								
3.3.19	Sound exposure <i>Replace 3.3.19 of IEC 62368-1 with the following definitions:</i>	N/A								

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
3.3.19.1	<p>momentary exposure level, MEL</p> <p>metric for estimating 1 s sound exposure level from the HD 483-1 S2 test signal applied to both channels, based on EN 50332-1:2013, 4.2.</p> <p>Note 1 to entry: MEL is measured as A-weighted levels in dB. Note 2 to entry: See B.3 of EN 50332-3:2017 for additional information.</p>		N/A
3.3.19.3	<p>sound exposure, E</p> <p>A-weighted sound pressure (p) squared and integrated over a stated period of time, T</p> <p>Note 1 to entry: The SI unit is Pa² s.</p> $E = \int_0^T p(t)^2 dt$		N/A
3.3.19.4	<p>sound exposure level, SEL</p> <p>logarithmic measure of sound exposure relative to a reference value, E_0, typically the 1 kHz threshold of hearing in humans.</p> <p>Note 1 to entry: SEL is measured as A-weighted levels in dB.</p> $SEL = 10 \lg \left(\frac{E}{E_0} \right) \text{ dB}$ <p>Note 2 to entry: See B.4 of EN 50332-3:2017 for additional information.</p>		N/A
3.3.19.5	<p>digital signal level relative to full scale, dBFS</p> <p>levels reported in dBFS are always r.m.s. Full scale level, 0 dBFS, is the level of a dc-free 997-Hz sine wave whose undithered positive peak value is positive digital full scale, leaving the code corresponding to negative digital full scale unused</p> <p>Note 1 to entry: It is invalid to use dBFS for non-r.m.s. levels. Because the definition of full scale is based on a sine wave, the level of signals with a crest factor lower than that of a sine wave may exceed 0 dBFS. In particular, square wave signals may reach +3,01 dBFS.</p>		N/A
2	Modification to Clause 10		N/A
10.6	Safeguards against acoustic energy sources Replace 10.6 of IEC 62368-1 with the following:		N/A
10.6.1.1	<p>Introduction</p> <p>Safeguard requirements for protection against long-term exposure to excessive sound pressure levels from personal music players closely coupled to the ear are specified below. Requirements</p>		N/A

IEC62368_1E - ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
	<p>for earphones and headphones intended for use with personal music players are also covered. A personal music player is a portable equipment intended for use by an ordinary person, that:</p> <ul style="list-style-type: none"> – is designed to allow the user to listen to audio or audiovisual content / material; and – uses a listening device, such as headphones or earphones that can be worn in or on or around the ears; and – has a player that can be body worn (of a size suitable to be carried in a clothing pocket) and is intended for the user to walk around with while in continuous use (for example, on a street, in a subway, at an airport, etc.). <p>EXAMPLES Portable CD players, MP3 audio players, mobile phones with MP3 type features, PDAs or similar equipment.</p> <p>Personal music players shall comply with the requirements of either 10.6.2 or 10.6.3.</p> <p>NOTE 1 Protection against acoustic energy sources from telecom applications is referenced to ITU-T P.360.</p> <p>NOTE 2 It is the intention of the Committee to allow the alternative methods for now, but to only use the dose measurement method as given in 10.6.5 in future. Therefore, manufacturers are encouraged to implement 10.6.5 as soon as possible.</p> <p>Listening devices sold separately shall comply with the requirements of 10.6.6. These requirements are valid for music or video mode only. The requirements do not apply to:</p> <ul style="list-style-type: none"> – professional equipment; <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> <ul style="list-style-type: none"> – hearing aid equipment and other devices for assistive listening; – the following type of analogue personal music players: <ul style="list-style-type: none"> • long distance radio receiver (for example, a multiband radio receiver or world band radio receiver, an AM radio receiver), and • cassette player/recorder; <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <ul style="list-style-type: none"> – a player while connected to an external amplifier that does not allow the user to walk around while in use. 		

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>For equipment that is clearly designed or intended primarily for use by children, the limits of the relevant toy standards may apply.</p> <p>The relevant requirements are given in EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.</p>		
10.6.1.2	<p>Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz</p> <p>The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz). For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body mounted devices, attention is drawn to EN 50360 and EN 50566.</p>		N/A
10.6.2	Classification of devices without the capacity to estimate sound dose		N/A
10.6.2.1	<p>General</p> <p>This standard is transitioning from short-term based (30 s) requirements to long-term based (40 hour) requirements. These clauses remain in effect only for devices that do not comply with sound dose estimation as stipulated in EN 50332-3.</p> <p>For classifying the acoustic output $L_{Aeq,T}$, measurements are based on the A-weighted equivalent sound pressure level over a 30 s period.</p> <p>For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, measurements may be done over the duration of the complete song. In this case, T becomes the duration of the song.</p> <p>NOTE Classical music, acoustic music and broadcast typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the content and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song does not exceed the required limit. For example, if the player is set with the programme simulation noise to 85 dB, but the average music level of the song is only 65 dB, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dB.</p>		N/A
10.6.2.2	<p>RS1 limits (to be superseded, see 10.6.3.2)</p> <p>RS1 is a class 1 acoustic energy source that does not exceed the following:</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>– for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 85 dB when playing the fixed “programme simulation noise” described in EN 50332-1.</p> <p>– for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 27 mV (analogue interface) or -25 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1.</p> <p>– The RS1 limits will be updated for all devices as per 10.6.3.2.</p>		
10.6.2.3	<p>RS2 limits (to be superseded, see 10.6.3.3)</p> <p>RS2 is a class 2 acoustic energy source that does not exceed the following:</p> <p>– for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or when the combination of player and listening device is known by other means such as setting or automatic 130 detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 100 dB(A) when playing the fixed “programme simulation noise” as described in EN 50332-1.</p> <p>– for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 150 mV (analogue interface) or -10 dBFS (digital interface) when playing the fixed “programme simulation noise” as described in EN 50332-1.</p>		N/A
10.6.2.4	<p>RS3 limits</p> <p>RS3 is a class 3 acoustic energy source that exceeds RS2 limits.</p>		N/A
10.6.3	Classification of devices (new)		N/A
10.6.3.1	<p>General</p> <p>Previous limits (10.6.2) created abundant false negative and false positive PMP sound level warnings. New limits, compliant with The Commission Decision of 23 June 2009, are given below.</p>		N/A
10.6.3.2	<p>RS1 limits (new)</p> <p>RS1 is a class 1 acoustic energy source that does not exceed the following:</p> <p>– for equipment provided as a package (player with its listening device), and with a proprietary</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 80 dB when playing the fixed "programme simulation noise" described in EN 50332-1.</p> <p>– for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed "programme simulation noise" described in EN 50332-1.</p>		
10.6.3.3	<p>RS2 limits (new)</p> <p>RS2 is a class 2 acoustic energy source that does not exceed the following:</p> <p>– for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the weekly sound exposure level, as described in EN 50332-3, shall be ≤ 80 dB when playing the fixed "programme simulation noise" described in EN 50332-1.</p> <p>– for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output level, integrated over one week, as described in EN50332-3, shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed "programme simulation noise" described in EN 50332-1.</p>		N/A
10.6.4	Requirements for maximum sound exposure		N/A
10.6.4.1	<p>Measurement methods</p> <p>All volume controls shall be turned to maximum during tests.</p> <p>Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable.</p>		N/A
10.6.4.2	<p>Protection of persons</p> <p>Except as given below, protection requirements for parts accessible to ordinary persons, instructed persons and skilled persons are given in 4.3.</p> <p>NOTE 1 Volume control is not considered a safeguard.</p> <p>Between RS2 and an ordinary person, the basic safeguard may be replaced by an instructional safeguard in accordance with Clause F.5, except that the instructional safeguard shall be placed</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>on the equipment, or on the packaging, or in the instruction manual. Alternatively, the instructional safeguard may be given through the equipment display during use.</p> <p>The elements of the instructional safeguard shall be as follows:</p> <p style="text-align: center;">  </p> <ul style="list-style-type: none"> – element 1a: the symbol , IEC 60417-6044 (2011-01) – element 2: “High sound pressure” or equivalent wording – element 3: “Hearing damage risk” or equivalent wording – element 4: “Do not listen at high volume levels for long periods.” or equivalent wording <p>An equipment safeguard shall prevent exposure of an ordinary person to an RS2 source without intentional physical action from the ordinary person and shall automatically return to an output level not exceeding what is specified for an RS1 source when the power is switched off.</p> <p>The equipment shall provide a means to actively inform the user of the increased sound level when the equipment is operated with an output exceeding RS1. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an output exceeding RS1. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time.</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always needed.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent of how often and how long the personal music player has been switched off.</p> <p>A skilled person shall not be unintentionally exposed to RS3.</p>		
10.6.5	Requirements for dose-based systems		N/A
10.6.5.1	<p>General requirements</p> <p>Personal music players shall give the warnings as provided below when tested according to EN 50332-3, using the limits from this clause.</p> <p>The manufacturer may offer optional settings to allow the users to modify when and how they wish to receive the notifications and warnings to promote a better user experience without defeating the safeguards. This allows the users to be informed in a method that best meets their physical capabilities and device usage needs. If such optional settings are offered, an administrator (for</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>example, parental restrictions, business/educational administrators, etc.) shall be able to lock any optional settings into a specific configuration.</p> <p>The personal music player shall be supplied with easy to understand explanation to the user of the dose management system, the risks involved, and how to use the system safely. The user shall be made aware that other sources may significantly contribute to their sound exposure, for example work, transportation, concerts, clubs, cinema, car races, etc.</p>		
10.6.5.2	<p>Dose-based warning and requirements</p> <p>When a dose of 100 % <i>CSD</i> is reached, and at least at every 100 % further increase of <i>CSD</i>, the device shall warn the user and require an acknowledgement. In case the user does not acknowledge, the output level shall automatically decrease to compliance with class RS1.</p> <p>The warning shall at least clearly indicate that listening above 100 % <i>CSD</i> leads to the risk of hearing damage or loss.</p>		N/A
10.6.5.3	<p>Exposure-based requirements</p> <p>With only dose-based requirements, cause and effect could be far separated in time, defying the purpose of educating users about safe listening practice. In addition to dose-based requirements, a PMP shall therefore also put a limit to the short-term sound level a user can listen at.</p> <p>The exposure-based limiter (EL) shall automatically reduce the sound level not to exceed 100 dB(A) or 150 mV integrated over the past 180 s, based on methodology defined in EN 50332-3.</p> <p>The EL settling time (time from starting level reduction to reaching target output) shall be 10 s or faster.</p> <p>Test of EL functionality is conducted according to EN 50332-3, using the limits from this clause. For equipment provided as a package (player with its listening device), the level integrated over 180 s shall be 100 dB or lower. For equipment provided with a standardized connector, the unweighted level integrated over 180 s shall be no more than 150 mV for an analogue interface and no more than -10 dBFS for a digital interface.</p> <p>NOTE In case the source is known not to be music (or test signal), the EL may be disabled.</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	<p>Corded listening devices with analogue input</p> <p>With 94 dB L_{Aeq} acoustic pressure output of the listening device, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the input voltage of the listening device when playing the fixed “programme simulation noise” as described in EN 50332-1 shall be ≥ 75 mV.</p> <p>NOTE The values of 94 dB and 75 mV correspond with 85 dB and 27 mV or 100 dB and 150 mV.</p>		N/A
10.6.6.2	<p>Corded listening devices with digital input</p> <p>With any playing device playing the fixed “programme simulation noise” described in EN 50332-1, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the $L_{Aeq,T}$ acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS.</p>		N/A
10.6.6.3	<p>Cordless listening devices</p> <p>In cordless mode,</p> <ul style="list-style-type: none"> – with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and – respecting the cordless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and – with volume and sound settings in the receiving device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the above mentioned programme simulation noise, the $L_{Aeq,T}$ acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS. 		N/A
10.6.6.4	<p>Measurement method</p> <p><i>Measurements shall be made in accordance with EN 50332-2 as applicable.</i></p>		N/A
3	Modification to the whole document		P

IEC62368_1E - ATTACHMENT																																																																		
Clause	Requirement + Test				Result - Remark	Verdict																																																												
	<p>Delete all the “country” notes in the reference document according to the following list:</p> <table border="1"> <tr> <td>0.2.1</td> <td>Note 1 and 2</td> <td>1</td> <td>Note 4 and 5</td> <td>3.3.8.1</td> <td>Note 2</td> </tr> <tr> <td>3.3.8.3</td> <td>Note 1</td> <td>4.1.15</td> <td>Note</td> <td>4.7.3</td> <td>Note 1 and 2</td> </tr> <tr> <td>5.2.2.2</td> <td>Note</td> <td>5.4.2.3.2.2 Table 12</td> <td>Note c</td> <td>5.4.2.3.2.4</td> <td>Note 1 and 3</td> </tr> <tr> <td>5.4.2.3.2.4 Table 13</td> <td>Note 2</td> <td>5.4.2.5</td> <td>Note 2</td> <td>5.4.5.1</td> <td>Note</td> </tr> <tr> <td>5.4.10.2.1</td> <td>Note</td> <td>5.4.10.2.2</td> <td>Note</td> <td>5.4.10.2.3</td> <td>Note</td> </tr> <tr> <td>5.5.2.1</td> <td>Note</td> <td>5.5.6</td> <td>Note</td> <td>5.6.4.2.1</td> <td>Note 2 and 3 and 4</td> </tr> <tr> <td>5.6.8</td> <td>Note 2</td> <td>5.7.6</td> <td>Note</td> <td>5.7.7.1</td> <td>Note 1 and Note 2</td> </tr> <tr> <td>8.5.4.2.3</td> <td>Note</td> <td>10.2.1 Table 39</td> <td>Note 3 and 4 and 5</td> <td>10.5.3</td> <td>Note 2</td> </tr> <tr> <td>10.6.4</td> <td>Note 3</td> <td>F.3.3.6</td> <td>Note 3</td> <td>Y.4.1</td> <td>Note</td> </tr> <tr> <td>Y.4.5</td> <td>Note</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>					0.2.1	Note 1 and 2	1	Note 4 and 5	3.3.8.1	Note 2	3.3.8.3	Note 1	4.1.15	Note	4.7.3	Note 1 and 2	5.2.2.2	Note	5.4.2.3.2.2 Table 12	Note c	5.4.2.3.2.4	Note 1 and 3	5.4.2.3.2.4 Table 13	Note 2	5.4.2.5	Note 2	5.4.5.1	Note	5.4.10.2.1	Note	5.4.10.2.2	Note	5.4.10.2.3	Note	5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3 and 4	5.6.8	Note 2	5.7.6	Note	5.7.7.1	Note 1 and Note 2	8.5.4.2.3	Note	10.2.1 Table 39	Note 3 and 4 and 5	10.5.3	Note 2	10.6.4	Note 3	F.3.3.6	Note 3	Y.4.1	Note	Y.4.5	Note					P
0.2.1	Note 1 and 2	1	Note 4 and 5	3.3.8.1	Note 2																																																													
3.3.8.3	Note 1	4.1.15	Note	4.7.3	Note 1 and 2																																																													
5.2.2.2	Note	5.4.2.3.2.2 Table 12	Note c	5.4.2.3.2.4	Note 1 and 3																																																													
5.4.2.3.2.4 Table 13	Note 2	5.4.2.5	Note 2	5.4.5.1	Note																																																													
5.4.10.2.1	Note	5.4.10.2.2	Note	5.4.10.2.3	Note																																																													
5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3 and 4																																																													
5.6.8	Note 2	5.7.6	Note	5.7.7.1	Note 1 and Note 2																																																													
8.5.4.2.3	Note	10.2.1 Table 39	Note 3 and 4 and 5	10.5.3	Note 2																																																													
10.6.4	Note 3	F.3.3.6	Note 3	Y.4.1	Note																																																													
Y.4.5	Note																																																																	
4	Modification to Clause 1					P																																																												
1	<p>Add the following note:</p> <p><i>NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.</i></p>					P																																																												

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5	Modification to 4.Z1		P
4.Z1	<p>Add the following new subclause after 4.9:</p> <p>To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. mains, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for pluggable equipment type B or permanently connected equipment, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for pluggable equipment type A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>	<p>Considered.</p> <p>Complied with item a) for internal fuses used on unit and for parts as described in b) reliance on the protection in the building installation.</p>	P
6	Modification to 5.4.2.3.2.4		N/A
5.4.2.3.2.4	<p>Add the following to the end of this subclause:</p> <p>The requirement for interconnection with external circuit is in addition given in EN 50491-3:2009.</p>		N/A
7	Modification to 10.2.1		N/A
10.2.1	<p>Add the following to ^{c)} and ^{d)} in table 39:</p> <p>For additional requirements, see 10.5.1.</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
8	Modification to 10.5.1		N/A
10.5.1	<p>Add the following after the first paragraph:</p> <p>For RS 1 compliance is checked by measurement under the following conditions:</p> <p>In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or pre-sets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.</p> <p>NOTE Z1 Soldered joints and paint lockings are examples of adequate locking.</p> <p>The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus.</p> <p>Moreover, the measurement shall be made under fault conditions causing an increase of the high voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.</p> <p>For RS1, the dose-rate shall not exceed 1 μSv/h taking account of the background level.</p> <p>NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.</p>		N/A
9	Modification to G.7.1		--
G.7.1	<p>Add the following note:</p> <p>NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
10	Modification to Bibliography		N/A
	<p>Add the following notes for the standards indicated:</p> <p>IEC 60130-9 NOTE Harmonized as EN 60130-9. IEC 60269-2 NOTE Harmonized as HD 60269-2. IEC 60309-1 NOTE Harmonized as EN 60309-1. IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 series. IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4. IEC 60664-5 NOTE Harmonized as EN 60664-5. IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified). IEC 61508-1 NOTE Harmonized as EN 61508-1. IEC 61558-2-1 NOTE Harmonized as EN 61558-2-1. IEC 61558-2-4 NOTE Harmonized as EN 61558-2-4. IEC 61558-2-6 NOTE Harmonized as EN 61558-2-6. IEC 61843-1 NOTE Harmonized as EN 61843-1. IEC 61843-21 NOTE Harmonized as EN 61843-21. IEC 61843-311 NOTE Harmonized as EN 61843-311. IEC 61843-321 NOTE Harmonized as EN 61843-321. IEC 61843-331 NOTE Harmonized as EN 61843-331.</p>		N/A
11	ADDITION OF ANNEXES		P
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		P
4.1.15	<p>Denmark, Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added: Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord." In Finland: "Laitte on liitettävä suojakoskettimilla varustettuun pistorasiaan" In Norway: "Apparatet må tilkoples jordet stikkontakt" In Sweden: "Apparaten skall anslutas till jordat uttag"</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.3	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex</p>	Not direct plug in equipment.	N/A
5.2.2.2	<p>Denmark</p> <p>After the 2nd paragraph add the following:</p> <p>A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>	Not high touch current measured.	N/A
5.4.11.1 and Annex G	<p>Finland and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>For separation of the telecommunication network from earth the following is applicable:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), <p>and</p> <ul style="list-style-type: none"> • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under</p>	No such construction.	N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>the following conditions:</p> <ul style="list-style-type: none"> the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; the additional testing shall be performed on all the test specimens as described in EN 60384-14; <p>the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</p>		
5.5.2.1	<p>Norway</p> <p>After the 3rd paragraph the following is added:</p> <p>Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).</p>		P
5.5.6	<p>Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.2.</p>		N/A
5.6.1	<p>Denmark</p> <p>Add to the end of the subclause</p> <p>Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment.</p> <p><i>Justification:</i></p> <p>In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.</p>		N/A
5.6.4.2.1	<p>Ireland and United Kingdom</p> <p>After the indent for pluggable equipment type A, the following is added:</p> <p>– the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug.</p>	Added.	N/A
5.6.4.2.1	<p>France</p> <p>After the indent for pluggable equipment type A, the following is added:</p> <p>– in certain cases, the protective current rating of the circuit supplied from the mains is taken as 20 A instead of 16 A.</p>	Added.	N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.5.1	<p>To the second paragraph the following is added:</p> <p>The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm² to 1,5 mm² in cross-sectional area.</p>		N/A
5.6.8	<p>Norway</p> <p>To the end of the subclause the following is added: Equipment connected with an earthed mains plug is classified as class I equipment. See the Norway marking requirement in 4.1.15. The symbol IEC 60417-6092, as specified in F.3.6.2, is accepted.</p>	Should be evaluated in national difference approval.	N/A
5.7.6	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.6.2	<p>Denmark</p> <p>To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA .</p>		N/A
5.7.7.1	<p>Norway and Sweden</p> <p>To the end of the subclause the following is added: The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>“Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplede utstyr – og er tilkoplede et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.”</p> <p>Translation to Swedish: ”Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och</p>	Not TV set.	N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”.		
8.5.4.2.3	<p>United Kingdom</p> <p>Add the following after the 2nd dash bullet in 3rd paragraph:</p> <p>An emergency stop system complying with the requirements of IEC 60204-1 and ISO 13850 is required where there is a risk of personal injury.</p>	Added.	N/A
B.3.1 and B.4	<p>Ireland and United Kingdom</p> <p>The following is applicable:</p> <p>To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment, until the requirements of Annexes B.3.1 and B.4 are met</p>	Not a direct plug-in equipment.	N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a polyphase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p><i>Justification:</i> Heavy Current Regulations, Section 6c</p>	No main socket-outlets used.	N/A
G.4.2	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.1	<p>United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc. (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations.</p> <p>NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>		N/A
G.7.1	<p>Ireland</p> <p>To the first paragraph the following is added:</p> <p>Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard</p>		N/A
G.7.2	<p>Ireland and United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>A power supply cord with a conductor of 1,25 mm² is allowed for equipment which is rated over 10 A and up to and including 13 A.</p>		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A
10.5.2	<p>Germany</p> <p>The following requirement applies:</p> <p>For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.</p> <p><i>Justification:</i> German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM.</p> <p>NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de</p>		N/A

IEC62368_1E - ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict															
ZD	IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS (EN)		P															
	<table border="1"> <thead> <tr> <th data-bbox="336 371 884 479" rowspan="2">Type of flexible cord</th> <th colspan="2" data-bbox="884 371 1299 412">Code designations</th> </tr> <tr> <th data-bbox="884 412 1114 479">IEC</th> <th data-bbox="1114 412 1299 479">CENELEC</th> </tr> </thead> </table>		Type of flexible cord	Code designations		IEC	CENELEC	P										
Type of flexible cord	Code designations																	
	IEC	CENELEC																
	<table border="1"> <thead> <tr> <th colspan="3" data-bbox="336 479 1299 519">PVC insulated cords</th> </tr> </thead> <tbody> <tr> <td data-bbox="336 519 884 560">Flat twin tinsel cord</td> <td data-bbox="884 519 1114 560">60227 IEC 41</td> <td data-bbox="1114 519 1299 560">H03VH-Y</td> </tr> <tr> <td data-bbox="336 560 884 640">Light polyvinyl chloride sheathed flexible cord</td> <td data-bbox="884 560 1114 640">60227 IEC 52</td> <td data-bbox="1114 560 1299 640">H03VV-F H03VVH2-F</td> </tr> <tr> <td data-bbox="336 640 884 757">Ordinary polyvinyl chloride sheathed flexible cord</td> <td data-bbox="884 640 1114 757">60227 IEC 53</td> <td data-bbox="1114 640 1299 757">H05VV-F H05VVH2-F</td> </tr> </tbody> </table>		PVC insulated cords			Flat twin tinsel cord	60227 IEC 41	H03VH-Y	Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F	Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F				
PVC insulated cords																		
Flat twin tinsel cord	60227 IEC 41	H03VH-Y																
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F																
Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F																
	<table border="1"> <thead> <tr> <th colspan="3" data-bbox="336 757 1299 797">Rubber insulated cords</th> </tr> </thead> <tbody> <tr> <td data-bbox="336 797 884 837">Braided cord</td> <td data-bbox="884 797 1114 837">60245 IEC 51</td> <td data-bbox="1114 797 1299 837">H03RT-F</td> </tr> <tr> <td data-bbox="336 837 884 878">Ordinary tough rubber sheathed flexible cord</td> <td data-bbox="884 837 1114 878">60245 IEC 53</td> <td data-bbox="1114 837 1299 878">H05RR-F</td> </tr> <tr> <td data-bbox="336 878 884 918">Ordinary polychloroprene sheathed flexible cord</td> <td data-bbox="884 878 1114 918">60245 IEC 57</td> <td data-bbox="1114 878 1299 918">H05RN-F</td> </tr> <tr> <td data-bbox="336 918 884 1021">Heavy polychloroprene sheathed flexible cord</td> <td data-bbox="884 918 1114 1021">60245 IEC 66</td> <td data-bbox="1114 918 1299 1021">H07RN-F</td> </tr> </tbody> </table>		Rubber insulated cords			Braided cord	60245 IEC 51	H03RT-F	Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F	Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F	Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F	
Rubber insulated cords																		
Braided cord	60245 IEC 51	H03RT-F																
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F																
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F																
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F																
	<table border="1"> <thead> <tr> <th colspan="3" data-bbox="336 1021 1299 1061">Cords having high flexibility</th> </tr> </thead> <tbody> <tr> <td data-bbox="336 1061 884 1102">Rubber insulated and sheathed cord</td> <td data-bbox="884 1061 1114 1102">60245 IEC 86</td> <td data-bbox="1114 1061 1299 1102">H03RR-H</td> </tr> <tr> <td data-bbox="336 1102 884 1142">Rubber insulated, crosslinked PVC sheathed cord</td> <td data-bbox="884 1102 1114 1142">60245 IEC 87</td> <td data-bbox="1114 1102 1299 1142">H03RV4-H</td> </tr> <tr> <td data-bbox="336 1142 884 1236">Crosslinked PVC insulated and sheathed cord</td> <td data-bbox="884 1142 1114 1236">60245 IEC 88</td> <td data-bbox="1114 1142 1299 1236">H03V4V4-H</td> </tr> </tbody> </table>		Cords having high flexibility			Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H	Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H	Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H				
Cords having high flexibility																		
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H																
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H																
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H																
	<table border="1"> <thead> <tr> <th colspan="3" data-bbox="336 1236 1299 1303">Cords insulated and sheathed with halogen-free thermoplastic compounds</th> </tr> </thead> <tbody> <tr> <td data-bbox="336 1303 884 1393">Light halogen-free thermoplastic insulated and sheathed flexible cords</td> <td colspan="2" data-bbox="884 1303 1299 1393">H03Z1Z1-F H03Z1Z1H2-F</td> </tr> <tr> <td data-bbox="336 1393 884 1491">Ordinary halogen-free thermoplastic insulated and sheathed flexible cords</td> <td colspan="2" data-bbox="884 1393 1299 1491">H05Z1Z1-F H05Z1Z1H2-F</td> </tr> </tbody> </table>		Cords insulated and sheathed with halogen-free thermoplastic compounds			Light halogen-free thermoplastic insulated and sheathed flexible cords	H03Z1Z1-F H03Z1Z1H2-F		Ordinary halogen-free thermoplastic insulated and sheathed flexible cords	H05Z1Z1-F H05Z1Z1H2-F								
Cords insulated and sheathed with halogen-free thermoplastic compounds																		
Light halogen-free thermoplastic insulated and sheathed flexible cords	H03Z1Z1-F H03Z1Z1H2-F																	
Ordinary halogen-free thermoplastic insulated and sheathed flexible cords	H05Z1Z1-F H05Z1Z1H2-F																	

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 62368-1 U.S.A. AND CANADA NATIONAL DIFFERENCES (Audio/video, information and communication technology equipment – Part 1: Safety requirements)			
Differences according to.....: CSA/UL 62368-1:2019			
TRF template used:: IECEE OD-2020-F3, Ed. 1.1			
Attachment Form No.: US_CA_ND_IEC62368_1E			
Attachment Originator: UL(US)			
Master Attachment: Dated 2022-03-04			
Copyright © 2022 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
IEC 62368-1 - US and Canadian National Differences Special National Conditions based on Regulations and Other National Differences			
1 (1DV.1) (1.3)	All equipment is to be designed to allow installation in accordance with the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CEC), Part 1, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2. Also, for such equipment marked or otherwise identified, installation is allowed per the Standard for the Protection of Information Technology Equipment, ANSI/NFPA 75.	In accordance with the National Electrical Code (NEC) and the Canadian Electrical Code (CEC) part 1 CAN/CSA C22.1, ANSI/NFPA 70, and unless marked or otherwise identified, the Standard for Electronic Computer/Data-Processing Equipment, ANSI/NFPA 75.	P
1 (1DV.2.1)	This standard includes additional requirements for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities. See Annex DVB.		N/A
1 (1DV.2.2)	This standard includes additional requirements for equipment intended for mounting under cabinets. See Annex DVC.		N/A
1 (1DV.2.3)	IEC 62368-3 clause 5 for DC power transfer at ES1 or ES2 voltage levels is considered informative. IEC 62368-3 clause 6 for remote power feeding telecommunication (RFT) circuits is considered normative (see ITU K.50). Alternatively, equipment with RFT circuits are given in either UL 2391 or CSA/UL 60950-21. RFT-C circuits are not permitted unless the RFT-C circuit complies with RFT-V limits ($\leq 200V$ per conductor to earth).		N/A
1 (1DV.3)	For protection against direct lightning strikes, reference is made to NFPA 780 and CAN/CSA-B72 for additional requirements.		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
1 (DV.5)	Additional requirements apply to some forms of power distribution equipment, including sub-assemblies.		N/A
4.1 (4.1.17)	For lengths exceeding 3.05 m, external interconnecting cable assemblies are required to be a suitable cable type (e.g., DP, CL2) specified in the NEC.		P
	For lengths 3.05 m or less, external interconnecting cable assemblies that are not types specified in the NEC generally are required to have special construction features and identification markings.		N/A
4.6 (4.6.2)	Wire-wrap terminals have special construction and performance requirements.		N/A
4.8 (4.8.3, 4.8.4.5, 4.8.5)	Coin / button cell batteries have modified special construction and performance requirements.		N/A
5.4.2.3.2 (5.4.2.3.2.1)	Surge Arrestors and Transient Voltage Surge Suppressors installed external to the equipment are required to comply with the appropriate NEC and CEC requirements.		N/A
5.5.9	Receptacles, rated 125-V, single phase, 15- or 20-A accessible to either ordinary, instructed, or skilled persons are required to be provided with GFCI Protection for Personnel if the equipment containing the receptacles is installed outdoors. The protection devices are required to comply with UL 943, and CAN/CSA C22.2 No.144.		N/A
5.6.3	Protective earthing conductors comply with the minimum conductor sizes in Table G.7, except as required by Table G.7ADV.1 for cord connected equipment, or Annex DVH for permanently connected equipment.		N/A
5.7.8 (5.7.8.1)	Equipment intended to receive telecommunication ringing signals is required to comply with a special touch current measurement tests.		N/A
6.5.1	PS3 wiring outside a fire enclosure is required to comply with single fault testing in B.4, or be current limited per one of the permitted methods.		N/A
Annex F (F.3.3.9)	Output terminals provided for supply of other equipment, except mains supply, are required to be marked with a maximum rating or reference to equipment permitted to be connected.	See rating label	P
Annex F (F.3.7)	Outdoor Enclosures are required to be classified and marked in accordance with UL 50 or 50E, or CAN/CSA C22.2 No. 94.1 or 94.2.		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex G (G.7)	Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.		N/A
	Power supply cords are required to have attachment plugs rated not less than 125 percent of the rated current of the equipment.		N/A
	Flexible power supply cords are required to be compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.		N/A
	Minimum cord length is required to be 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement. Power supply cords are required to be no longer than 4.5 m in length if used in ITE Rooms.		N/A
	Power supply cords for outdoor equipment are required to be suitable outdoor use type as required by Section 400.4 of the NEC and Rule 4-012 of the CEC, i.e., marked "W."		N/A
Annex H.2	Continuous ringing signals under normal operating conditions up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.	No such circuits within the equipment.	N/A
Annex H.4	For circuits with other than ringing signals and with voltages exceeding 42.4 V _{peak} or 60 V _{d.c.} , the maximum acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.	No such circuits within the equipment.	N/A
Annex Q (Q.3)	Equipment with paired conductor and/or coax communications cables/wiring connected to building wiring are required to have special voltage, current, power and marking requirements.		N/A
Annex DVA (1)	Equipment that is designed such that it may be powered from a separate electrical service, is required to meet applicable requirements for service equipment for control and protection of services and their installation and complies with Article 230 of the National Electrical Code (NEC), NFPA 70 and Section 6 of the Canadian Electrical Code, Part I, CSA C22.1.		N/A
	Equipment intended for use in spaces used for environmental air (plenums) are subjected to special flammability requirements for heat and visible smoke release.		N/A

IEC62368_1E - ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
	For ITE room applications, automated information storage systems with combustible media greater than 0.76 m ³ (27 cu ft) are required to have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.		N/A
	Consumer products designed or intended primarily for children 12 years of age or younger are subject to additional requirements in accordance with U.S. and Canadian Regulations.		N/A
	Baby monitors are required to additionally comply with ASTM F2951, Consumer Safety Specification for Baby Monitors.		N/A
	Storage batteries and battery management equipment, other than associated with lead-acid batteries, and including battery backup systems that are not an integral part of stationary AV and ICT equipment, such as provided in separate cabinets, are required to be certified (listed) to the appropriate standard(s) for such storage batteries and equipment.		N/A
Annex DVA (5.6)	For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.		P
Annex DVA (6.3)	The maximum quantity of flammable liquid stored in equipment is required to comply with NFPA 30.		N/A
Annex DVA (6.4.8)	For ITE room applications, enclosures with combustible material measuring greater than 0.9 m ² (10 sq ft) or a single dimension greater than 1.8 m (6 ft) are required to have a flame spread rating of 50 or less. For equipment with the same dimensions for other applications, an external surface that is not a fire enclosure requires a minimum flammability classification of V-1.		N/A
Annex DVA (10.3)	Equipment with lasers is required to meet the U.S. Code of Federal Regulations 21 CFR 1040 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (10.5)	Equipment that produces ionizing radiation is required to comply with the U.S. Code of Federal Regulations, 21 CFR 1020 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVA (F.3.3.4)	Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings. Additional considerations apply for voltage ratings that exceed the attachment cap rating or that are lower than the "Normal Operating Condition" in Table 2 of CAN/CSA C22.2 No. 235."		N/A
Annex DVA (F.3.3.6)	Equipment identified for ITE (computer) room installation is required to be marked with the rated current.		N/A
Annex DVA (G.1)	Vertically-mounted disconnect switches and circuit breakers are required to have the "on" position indicated by the handle in the up position, where mounted in an enclosure, vertically mounted disconnect switches and circuit breakers with vertical operating means extending outside the enclosure are required to indicate in a location visible when accessing the external operating means whether the switch or circuit breaker is in the open (off) or closed (on) position.		N/A
Annex DVA (G.3.4)	Suitable NEC/CEC branch circuit protection rated at the maximum circuit rating is required for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable.		N/A
	Where a fuse is used to provide Class 2 or Class 3 current limiting, it is not operator-accessible unless it is non- interchangeable.		N/A
Annex DVA (G.4.2)	Equipment with isolated ground (earthing) receptacles is required to comply with NEC 250.146(D) and CEC 10-400 and 10-612.		N/A
Annex DVA (G.4.3)	Interconnection of units by conductors supplied by a limited power source, or a Class 2 circuit defined in the NEC/CEC may have field wiring connections other than specified in DVH.3, such as wire-wrap and crimp-on types, if the limited power source and Class 2 circuits are separated from all other circuits by barriers, routing or fixing.		N/A
Annex DVA (G.5.3)	Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, require special transformer overcurrent protection.		N/A
Annex DVA (G.5.4)	Motor control devices are required for cord-connected equipment with a mains-connected motor if the equipment is rated more than 12 A, or if the equipment has a nominal voltage rating greater than 120 V, or if the motor is rated more than 1/3 hp (locked rotor current over 43 A).		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVA (G.7)	Flexible cords used outdoors are required to have the suffix "W" marked on the flexible cord.		N/A
Annex DVA (M)	For ITE room applications, equipment with battery systems capable of supplying 750 VA for five minutes are required to have a battery disconnect means that may be connected to the ITE room remote power-off circuit.		N/A
Annex DVA (Q)	If applicable per NEC 725.121(C), some limited power sources supplied from AV/ICT equipment are required to have a label indicating the maximum voltage and rated current output for per conductor for each connection point. Where multiple connection points have the same rating, a single label is permitted to be used.		N/A
	Wiring terminals intended to supply Class 2 outputs in accordance with the NEC or CEC Part 1 are required to be marked with the voltage rating and "Class 2" or equivalent. The marking is located adjacent to the terminals and visible during wiring.		N/A
	Applicable parts of Chapter 8 of the NEC, and Rules 54 and 60 of the CEC, may be applicable to ITE installed outdoors with connections to communication systems.		N/A
Annex DVB (1)	Additional requirements apply for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities.		N/A
Annex DVC (1)	Additional requirements apply for equipment intended for mounting under kitchen cabinets.		N/A

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVE (4.1.1)	Some equipment, components, sub-assemblies and materials associated with the risk of fire, electric shock, or personal injury are required to have component or material ratings in accordance with the applicable national (U.S. and Canadian) component or material requirements. These equipment and components include: appliance couplers, attachment plugs, battery backup systems, circuit breakers, communication circuit accessories, connectors (used for current interruption of non-LPS circuits), direct plug-in equipment, electrochemical capacitor modules (energy storage modules with ultracapacitors), enclosures (outdoor), flexible cords and cables, fuses (branch circuit), ground-fault current interrupters, interconnecting cables, modular data centres, power supply cords, some power distribution equipment, printed wiring, protectors for communications circuits, receptacles, surge protective devices, vehicle battery adapters, wire connectors, and wire and cables.	UL approved components used. Refer to table 4.1.2 of IEC 62368-1 test report for details.	P
Annex DVH	Equipment for permanent connection to the mains supply is subjected to additional requirements.		N/A
Annex DVH (DVH.1)	Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains are required to be in accordance with the NEC/CEC.		N/A
Annex DVH (DVH.2.1)	For safe and reliable connection to a mains, permanently connected equipment is to be provided.		N/A
Annex DVH (DVH.2.2)	Additional considerations for D.C. mains.		N/A
Annex DVH (DVH.3.2.1)	Terminals for permanent wiring, including protective earthing terminals, are required to be suitable for U.S./Canadian wire gauge sizes, rated 125 percent of the equipment rating, and be specially marked when specified.		N/A
Annex DVH (DVH.3.2.3)	Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm ²).		N/A
Annex DVH (DVH.3.2.4)	All associated mains supply terminals are located in proximity to each other and to the main protective earthing terminal, if any.		N/A
Annex DVH (DVH.3.2.5)	Terminals are located, guarded or insulated so that, should a strand of a conductor escape when the conductor is fitted, there is no likelihood of accidental contact between such a strand and accessible conductive parts or unearthed conductive parts separated from accessible conductive parts by supplementary insulation only.		N/A

IEC62368_1E - ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
Annex DVH (DVH.3.3)	When field connection to an external circuit is via wires (example, free conductors), the wires are not smaller than 18 AWG (0.82 mm ²) and the free length of the wire inside an outlet box or wiring compartment is 150 mm or more.		N/A
Annex DVH (DVH.3.4)	Size of protective earthing conductors and terminals	(See sub-clause 5.6.5)	P
Annex DVH (DVH.4)	Permanently connected equipment is required to have a suitable wiring compartment and wire bending space.		N/A
Annex DVH (DVH.4.1)	Wire bending space		N/A
Annex DVH (DVH.4.2)	Volume of wiring compartment		N/A
Annex DVH (DVH.4.3)	Separation of circuits		N/A
Annex DVH (DVH.5)	Equipment markings and instructional safeguards		N/A
Annex DVH (DVH.5.1)	Identification of protective earthing terminal		N/A
Annex DVH (DVH.5.2)	Identification of terminal for earthed conductor (neutral)		N/A
Annex DVH (DVH.5.3)	Identification of terminals for aluminium conductors		N/A
Annex DVH (DVH.5.4)	Wire temperature ratings		N/A
Annex DVH (DVH 5.5)	Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment, is required to comply with special earthing, wiring, marking and installation instruction requirements.		N/A
Annex DVI (6.7)	Equipment intended for connection to telecommunication network outside plant cable is required to be protected against overvoltage from power line crosses.		N/A

Annex DVJ (10.6.1)	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.		N/A
--------------------	--	--	-----

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 62368-1:2018 SAUDI ARABIA NATIONAL DIFFERENCES (Audio/video, information and communication technology equipment Part 1: Safety requirements)			
Differences according to : National standard SASO-IEC 62368-1:2020			
TRF template used: : IECEE OD-2020-F3, Ed. 1.1			
Attachment Form No. : SA_ND_IEC62368_1E			
Attachment Originator : SASO			
Master Attachment : 2022-12-22			
Copyright © 2022 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		P
			--
	Plugs used for pluggable equipment comply with standard SASO-2203.	See appended table 4.1.2	P
--	Frequency (Hz)	50/60	P
	60 Hz	Including 60Hz	P
--	Rated voltage (V)	100-240Vac	P
	Single phase 230 V Three phase 400 V	Including Single phase 230VAC	P

IEC62368_1E – ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

ATTACHMENT TO TEST REPORT
IEC 62368-1:2018
JAPAN NATIONAL DIFFERENCES
 Audio/video, information and communication technology equipment – Part 1: Safety requirements

Differences according to	J62368-1(2023)
TRF template used:	IECEE OD-2020-F3:2022, Ed. 1.2
Attachment Form No.	JP_ND_IEC62368_1E
Attachment Originator	UL Solutions (JP)
Master Attachment	Dated 2023-05-12

Copyright © 2023 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

National Differences		--
4.1.2	Where the component, or a characteristic of a component, is a safeguard or a part of a safeguard, components shall comply with the requirements of this document or, where specified in a requirements clause, with the safety aspects of the relevant JIS component standards or IEC component standards, or components shall have properties equivalent to or better than these.	P
5.6.1	Mains socket-outlet and interconnection coupler shall comply with Clause G.4.2A if they are incorporated as part of the equipment.	N/A
5.6.2.1	<p>Connection for protective conductor of class 0I equipment provided with instructional safeguard in accordance with Clause F.3.6.1A is considered to make earlier and break later than supply connection.</p> <p>Mains plug having a lead wire for protective earthing connection of class 0I equipment shall comply with all of the following:</p> <ul style="list-style-type: none"> – Not to be used for equipment having a rated voltage of 150 V or more – Clip is not used for the earthing connection of the lead wire. – The lead wire for earthing is at least 10 cm long <p>If class 0I equipment provides an independent main protective earthing terminal and is intended to be installed by ordinary person, earthing wire shall be provided in the package of the equipment.</p>	N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.2.2	Internal earthing conductor of the cord set that is covered by the sheath of mains cord and is formed together with mains plug and appliance connector need not be green-and-yellow.		N/A
5.6.3	In case of class 0I equipment using power supply cord having two conductors (no earthing conductor), the conductor of protective earthing lead wire shall comply with either of the following: – use of annealed copper wire with 1.6 mm diameter or corrosion-inhibiting metal wire having size and strength that are equivalent to or more than the above copper wire – single core cord or single core cable with 1.25 mm ² or more cross-sectional area		N/A
5.7.3	For class 0I equipment that is provided with mains socket-outlet in the configuration as specified in JIS C 8282 series, JIS C 8300 or JIS C 8303, or that is provided with mains appliance outlet as specified in JIS C 8283 series for the purpose of interconnection, the measurement is conducted on the system of the interconnected equipment having a single connection to the mains.		N/A
5.7.5	In case of class 0I equipment, touch current shall not exceed 1.41 mA peak or for sinusoidal wave, 1.0 mA r.m.s. when measured using the network specified in Figure 4 of IEC 60990:2016.		P
6.4.3.2	A fuse complying with JIS C 6575 series or a fuse having equivalent characteristics shall open within 1 s. A fuse having time/current characteristics other than those specified in IEC 60127 shall be tested with the characteristics taken into account. In case of Class A fuse of JIS C 6575, replace “2.1 times” by “1.35 times” and in case of Class B fuse of JIS C 6575, replace “2.1 times” by “1.6 times”.		N/A
8.5.4.3.1	Only three-phase stationary equipment rated more than AC 200 V can be considered as being for use in locations where children are not likely to be present, when complying with Clause F.4.		N/A
8.5.4.3.2	For equipment installed where children may be present, an instructional safeguard shall be provided by easily understandable wording in accordance with Clause F.5, except that element 3 is optional.		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
8.5.4.3.4	The media destruction device is tested according to Clause V.1.2 with applicable jointed test probes to the opening. And then the wedge probe per Figure V.4 shall not contact any moving part.		N/A
8.5.4.3.5	The wedge probe of Figure V.4 and applicable jointed test probes specified in Clause V.1.2 shall not contact any moving part. Instructional safeguard shall not be used instead of equipment safeguard for preventing access to hazardous moving parts.		N/A
F.3.5.1	When the mains socket-outlet is configured in accordance with JIS C 8282 series, JIS C 8300 or JIS C 8303, the assigned current or power shall be marked. If the voltage of the socket-outlet is the same as the mains voltage, the voltage need not be marked. Instructional safeguard of Class 0I equipment shall be provided with an instructional safeguard in accordance with Clause F.5 when a mains socket-outlet as specified in JIS C 8282 series, JIS C 8300 or JIS C 8303 to which class I equipment can be connected is provided in accordance with Clause G.4.2A except for the cases where the socket-outlet is accessible only to skilled persons.		N/A
F.3.5.3	If the fuse is necessary for the safeguard function, the symbols indicating pre-arcing time-current characteristic shall be included.		P
F.3.6.1A	Marking for class 0I equipment The requirements of Clauses F.3.6.1.1 and F.3.6.1.2 shall be applied to class 0I equipment. For class 0I equipment, a marking of instructions shall be provided regarding the earthing connection. In addition to the above, for class 0I equipment, an instruction to connect earthing before and disconnect earthing after the connection of supply conductors shall be marked on the visible place of the main body or shall be in the text of an accompanying document.		N/A
F.3.6.2	Symbols, IEC 60417-5172 (2003-02) or IEC 60417-6092 (2011-10), shall not be used for class I equipment or class 0I equipment.		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.8A	<p>Attention marking for aging deterioration of CRT television</p> <p>Year of manufacture, standard usage period by design according to JIS C 9921-5 and cautionary statement for possible risks of aging deterioration when used beyond the specified period shall be marked on CRT television except for industrial use CRT television.</p>		N/A
F.4	<p>For audio equipment with terminals classified as ES3 in accordance with Table E.1, and for other equipment with terminals marked in accordance with F.3.6.1 and F.3.6.1A, the instructions shall require that the external wiring connected to these terminals shall be installed by a skilled person, or shall be connected by means of ready-made leads or cords that are constructed in a way that would prevent contact with any ES3 circuit.</p> <p>For class 0I equipment provided with independent main protective earthing terminal, where the cord for the protective earthing connection is not provided in the package of the equipment, if the protective earthing connection is made by instructed person or skilled person, the suitable installation instruction for the protective earthing connection shall be provided.</p>		N/A
G.3.2.1	<p>The thermal link when tested as a separate component, shall comply with the requirements of JIS C 6691 or have properties equivalent to or better than that.</p>		N/A
G.3.4	<p>Except for devices covered by Clause G.3.5, overcurrent protective devices used as a safeguard shall comply with the applicable JIS or IEC standard in accordance with 4.1.2 or shall have equivalent or better properties.</p> <p>Such a protective device shall have adequate breaking (rupturing) capacity to interrupt the maximum fault current (including short-circuit current) that can flow.</p>		P
G.4.1	<p>This requirement does not apply to connectors covered in Clauses G.4.2 and G.4.2A.</p>		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	<p>Mains connectors, mains plugs and socket-outlets shall comply with JIS C 8283 series, JIS C 8285, IEC 60309 series, JIS C 8282 series, JIS C 8300, JIS C 8303, or have equivalent or better properties.</p> <p>A power supply cord set provided with appliance connector that can fit appliance inlet complying with JIS C 8283-1 shall comply with JIS C 8286.</p> <p>Construction shall prevent mechanical stress not to transmit to the soldering part of appliance inlet terminal.</p> <p>When an equipment is rated not more than 125 V and all of the following are met, Type C14 and C18 appliance inlet complying with JIS C 8283-3 can be considered as rated 15 A.</p> <ul style="list-style-type: none"> – The temperature of appliance inlet does not exceed the value specified in JIS C 8283-1 under the most unfavourable normal operating condition as specified in Clause B.2.1. – "Use only designated cord set attached in this equipment" or equivalent text is described in the operating instruction. If the cord set is not provided in the package of the equipment, suitable information regarding to the cord set is described in the operating instruction. 		N/A
G.4.2A	Mains socket-outlet and interconnection coupler provided with the class II, class I and class 0I equipment respectively		N/A
G.7.1	A mains supply cord need not include the protective earthing conductor for class 0I equipment provided with independent protective earthing conductor.		N/A
G.7.2 Table G.7	Cross-sectional area of equipment rated up to and including 3 A shall be 0.75 mm ² .		N/A
G.7.6.1 Table G.9	<p>The cross-sectional area of mains cords according to JIS C 3010 may comply with relevant Japanese wiring regulation.</p> <p>For cables other than those complying with JIS C 3662 series or JIS C 3663 series, the terminals shall be suitable for the size of the intended cables.</p>		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 62368-1 (AUSTRALIA / NEW ZEALAND) NATIONAL DIFFERENCES (Audio/video, information and communication technology equipment)			
Differences according to : AS/NZS 62368.1:2022			
TRF template used:: IECEE OD-2020-F3, Ed. 1.1			
Attachment Form No. : AU_NZ_ND_IEC62368_1E			
Attachment Originator : JAS-ANZ			
Master Attachment : 2022-07-01			
Copyright © 2020 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		P
Appendix ZZ	Variations to IEC 62368-1:2018 (ED. 3.0) for Australia and New Zealand		P
ZZ1 Scope	This Appendix lists the normative variations to IEC 62368-1:2018 (ED. 3.0)		P
ZZ2 Variations	The following modifications are required for Australian/New Zealand conditions:		P
2	<p>After the first paragraph, <i>add</i> the following: The Australian or Australian/New Zealand Standards listed below are modified adoptions of, or not equivalent to, the IEC normative references and are required for the application of this Standard. All references in the source text to those IEC normative references shall be replaced by references to the corresponding Australian or Australian/New Zealand Standards. Australian or Australian/New Zealand Standards that are identical adoptions of international normative references may be used interchangeably</p> <ul style="list-style-type: none"> -AS/NZS 3112, <i>Approval and test specification—Plugs and socket-outlets</i> -AS/NZS 3123, <i>Approval and test specification—Plugs, socket-outlets and couplers for general industrial application</i> -AS/NZS 3191, <i>Electric flexible cords</i> -AS/NZS 60884.1, <i>Plugs and socket-outlets for household and similar purposes, Part 1: General requirements</i> -IEC 60086-2 <i>Primary batteries — Part 2: Physical and electrical specifications</i> -AS/NZS 60065, <i>Audio, video and similar electronic apparatus—Safety requirements (IEC 60065:2015 (ED.8.0) MOD)</i> -AS/NZS 60320.1, <i>Appliance couplers for household and similar general purposes,</i> 		P

IEC62368_1E – ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
	<p><i>Part 1: General requirements (IEC 60320-1, Ed.2.1 (2007) MOD)</i> <i>-AS/NZS 60320.2.2, Appliance couplers for household and similar general purposes</i> <i>Part 2.2: Interconnection couplers for household and similar equipment (IEC 60320-2-2, Ed.2.0 (1998) MOD)</i> <i>-AS/NZS 60695.2.11, Fire hazard testing, Part 2.11: Glowing/hot wire based test methods—Glow-wire flammability test method for end-products</i> <i>-AS/NZS 60695.11.5, Fire hazard testing, Part 11.5: Test flames—Needle-flame test method—Apparatus, confirmatory test arrangement and guidance</i> <i>-AS/NZS 60695.11.10, Fire hazard testing, Part 11.10: Test flames—50 W horizontal and vertical flame test methods</i> <i>-AS/NZS 60884.1, Plugs and socket-outlets for household and similar purposes,</i> <i>Part 1: General requirements</i> <i>-AS/NZS 60950.1, Information technology equipment—Safety, Part 1: General requirements (IEC 60950-1, Ed.2.2 (2013), MOD)</i> <i>IEC 61032:1997, Protection of persons and equipment by enclosures—Probes for verification</i> <i>-AS/NZS 61558.1, Safety of Power Transformers, Power Supplies, Reactors and Similar Products, Part 1: General requirements and tests (IEC 61558-1 Ed 3, MOD)</i> <i>-AS/NZS 61558.2.16, Safety of transformers, reactors, power supply units and similar products for voltages up to 1 100 V, Part 2.16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units.</i></p>		
<p>4.7.2</p>	<p>Requirements Delete the text of the second paragraph and replace with the following: Equipment with a plug portion, suitable for insertion into a 10 A 3-pin flat-pin socket-outlet conforming to AS/NZS 3112, shall conform to the requirements in AS/NZS 3112 for equipment with integral pins for insertion into socket-outlets. Conformity is checked by inspection and, if necessary, by the tests in AS/NZS 3112. NOTE: Equipment with plug portions for use in countries other than Australia and New Zealand will need to conform to other countries' requirements Note Additional AS/NZS 3112 Appendix J,TRF is appended to end of this TRF.</p>		<p>N/A</p>
<p>4.7.3</p>	<p>Compliance Criteria Delete this clause</p>		<p>N/A</p>

IEC62368_1E – ATTACHMENT					
Clause	Requirement + Test			Result - Remark	Verdict
4.8.1	General After second list, <i>add</i> the following: NOTE: Refer to the Consumer Goods (Products Containing Button/Coin Batteries) Safety Standard 2020 and Consumer Goods (Products Containing Button/Coin Batteries) Information Standard 2020 for more information on button cell batteries in Australia..			No coin/button cell batteries used.	N/A
5.4.10.2.1	General <i>Delete</i> the first paragraph and <i>replace</i> with the following: In Australia, the separation is checked by the test given in both Clause 5.4.10.2.2 and Clause 5.4.10.2.3. In New Zealand, the separation is checked by the test given in either 5.4.10.2.2 or 5.4.10.2.3..				N/A
Table 28	<i>Delete</i> Table 28 and <i>replace</i> with the following:				N/A
Parts	Impulse test		Steady state test		
	New Zealand	Australia	New Zealand	Australia	
Parts indicated in Clause 5.4.10.1 a) ^a	2.5 kV	7.0 kV for hand-held telephones and headsets, 2.5 kV for other equipment.	1.5 kV	3 kV	
Parts indicated in Clause 5.4.10.1 b) and c) ^b	1.5 kV ^c		1.0 kV	1.5 kV	
^a Surge suppressors shall not be removed. ^b Surge suppressors may be removed, provided that such devices pass the impulse test of Clause 5.4.10.2.2 when tested as components outside the equipment. ^c During this test, it is allowed for a surge suppressor to operate and for a sparkover to occur in a GDT.					
5.4.10.2.2	<i>Delete</i> "NOTE" and <i>replace</i> with "NOTE 1". After NOTE 1, <i>add</i> the following: NOTE 2: For Australia, the 7 kV impulse simulates lightning surges on typical rural and semi-rural network lines. NOTE 3: For Australia, the value of 2.5 kV for Clause 5.4.10.1 a) was chosen to ensure the adequacy of the insulation concerned and does not necessarily simulate likely overvoltages.				N/A
5.4.10.2.3	<i>Delete</i> "NOTE" and <i>replace</i> with "NOTE 1". After NOTE 1, <i>add</i> the following: NOTE 2: For Australia, where there are capacitors across the insulation under test, it is recommended that d.c. test voltages are used. NOTE 3: The 3 kV and 1.5 kV values for Australia have been determined considering the low frequency induced voltages from the power supply distribution system.				N/A
6	Electrically-caused fire				P

IEC62368_1E – ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
6.6	After Clause 6.6, <i>add</i> the new Clauses 6.201 as follows: 6.201 External power supplies, docking stations and other similar devices (see special national conditions)		P
8.6	Stability of equipment		N/A
Table 36	Footnote ^a , after first sentence, <i>add</i> the following: Equipment having displays with moving images shall include “television sets and display devices”.		N/A
8.6.1	After Clause 8.6.1 <i>add</i> the following new clauses: 8.6.201 Restraining Device fixing point (see special national conditions) 8.6.202 Restraining device (see special national conditions)		N/A
Annex F Paragraph F.3.3.4	Rated Voltage <i>Delete</i> “NOTE” and <i>replace</i> with NOTE1” After NOTE 1, <i>add</i> the following Equipment that is intended for connection to the supply mains in Australia and New Zealand shall be marked with: (a) A rated voltage of: <ul style="list-style-type: none"> • 230 V for single phase equipment • 400 V for poly phase equipment Or (b) A rated voltage range that includes: <ul style="list-style-type: none"> • 230 V for single phase equipment • 400 V for poly phase equipment NOTE 2: equipment that is not rated as above is not suitable for direct connection to the supply mains in Australia or new Zealand.		P
Annex F.3.3.5	After the list, <i>add</i> the following Equipment that is intended for connection to supply mains in Australia or New Zealand shall be marked with a rated frequency of 50 Hz or a rated frequency range or nominal value which includes 50Hz		P
Annex F.3.8	After “The DC output of an external power supply”, insert “or docking stations and other similar external devices”		N/A
Annex G Paragraph G.4.2	Mains connectors 1 After “IEC 60320”, insert “or AS/NZS 60320 series”. 2 After “IEC 60906-1”, insert “or AS/NZS 3123” 3 <i>After</i> first paragraph <i>add</i> the following: 10 A or 15 A 250 V flat pin plugs for the connection of equipment to mains-powered socket-outlets for household or similar general use shall comply with AS/NZS 3112 or AS/NZS 60884.1.		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Paragraph G.5.3.1	<p>Transformers, General</p> <p>1 Third dashed point <i>replace</i> 'IEC 61558-1 and the relevant parts of IEC 61558-2' with 'AS/NZS 61558-1 and the relevant parts of AS/NZS 61558.2'</p> <p>2 Fourth dashed point <i>replace</i> 'IEC 61558-2-16' with 'AS/NZS 61558.2.16'.</p>		N/A
Annex G.7.1	<p>Mains supply cords, General</p> <p>Fourth dashed paragraph, <i>replace</i> 'IEC 60320-1' with 'AS/NZS 60320.1'</p>	No such cord provided	N/A
Table G.7	<p>Sizes of conductors</p> <p>1 First column, second row, <i>delete</i> "6" and <i>replace</i> with "7.5"</p> <p>2 Second column, second row, <i>delete</i> '0,75' and <i>replace</i> with '0.75^b</p> <p>3 <i>Delete</i> NOTE 1.</p> <p>4 <i>Replace</i> 'NOTE 2' with 'NOTE:.'</p> <p>5 <i>Delete</i> 'Footnote b' and <i>replace</i> with the following:</p> <p>^b This nominal cross-sectional area is only allowed for Class II appliances if the length of the power supply cord, measured between the point where the cord, or cord guard, enters the appliance, and the entry to the plug does not exceed 2 m (0.5 mm² three-core supply flexible cords are not permitted; see AS/NZS 3191).</p> <p>6 Footnote c <i>replace</i> 'IEC 60320-1' with 'AS/NZS 60320.1'</p> <p>7 Footnote d <i>replace</i> 'IEC 60320-1' with 'AS/NZS 60320.1'</p>		N/A
Annex M M 2.1	<p><i>Add</i> "IEC 60086-2" to the list</p>		N/A
Annex M Paragraph M.3.2	<p>Test method</p> <p><i>Delete</i>"NOTE" and <i>replace</i> with "NOTE 1"</p> <p>After NOTE 1 <i>add</i> the following:</p> <p>NOTE 2: In cases where the voltage source is provided by power from an unassociated power source, consideration should be given to the effects of possible single fault conditions in the unassociated equipment. If the power source is unknown then it should be assumed that the maximum limit of ES1 may be applied to the source input under assumed single fault conditions in the source when assessing the charging circuit in the equipment under test.</p>		N/A
	Special national conditions (if any)		--

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
6.201	<p>External power supplies, docking stations and other similar devices For external power supplies, docking stations and other similar devices, during and after abnormal operating conditions and during single fault conditions the output voltage—</p> <p>(a) at all ES1 outlets or connectors shall not increase by more than 10 % of the output rated voltage under normal operating conditions, measured after 3 s of introducing a single fault condition and after 3 s of introducing abnormal operating conditions; and</p> <p>(b) of a USB outlet or connector shall not increase by more than 3 V or 10 % of the output rated voltage under normal operating conditions, whichever is higher, measured after 3 seconds of introducing a single fault condition and after 3 s of introducing abnormal operating conditions</p> <p>For equipment with multiple rated voltages at the output, the requirements apply with the equipment configured for each output rated voltage in turn</p> <p>NOTE: This is intended to reduce the possibility of battery fire or explosion in attached equipment or accessories when charging secondary lithium batteries. The 3 s measurement delay is based on IEC document 108/742/INF, <i>TC 108, Standards Interpretation Panel Question 15 — Output voltage</i>, in relation to similar requirements in IEC 62368-3:2017.</p> <p>Conformity shall be checked by measurement, taking into account the abnormal operating conditions of Annex B.3 and the simulated single fault conditions of Annex B.4.</p>	<p>Added. Compliance checked. The output voltage not increase by more than 10% during and after abnormal operating conditions and during single fault conditions.</p>	P
8.6.201	<p>Restraining device fixing point Freestanding-capable MS2 and MS3 television sets and display devices shall be provided with a fixing point to facilitate the anchoring of the equipment from toppling</p> <p>The fixing point shall conform to Clause 8.7 where the fixing point uses a wall, ceiling or other structure mount. Alternatively, the fixing point shall be capable of withstanding a pull equal to the mass of the equipment in all directions without damage</p> <p>Instructions for installation or instructions for use shall be provided to specify correct use of the fixing point</p>		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
8.6.202	<p>Restraining device MS2 and MS3 television sets and display devices shall be provided with a restraining device and associated hardware to attach to the television set or display device.</p> <p>The restraining device shall be capable of withstanding a pull equal to the mass of the equipment in all directions.</p> <p>Instructions for installation or instructions for use shall be provided to specify correct use of the fixing point</p>		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT AS_NZS_3112:2017 +A1:2021 Appendix J AUSTRALIAN / NEW ZEALAND NATIONAL DIFFERENCES (Approval and test specification—Plugs and socket-outlets)			
Differences according to: AS_NZS_3112:2017_Amendment 1:2021_Appendix J			
TRF template used: : IECEE OD-2020-F3, Ed. 1.1			
Attachment Form No.: AS_NZS_3112:2017_Appendix J			
Attachment Originator: JAS-ANZ			
Master Attachment.....: 2022-06			
Copyright © 2020 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	Note: AS/NZS 3112 is NOT covered by IECEE Accreditation for Testing / Reporting		--
	Please State Laboratory Accreditation for this Standard		--
	Accreditation		--
	Accreditation Stamp		--

J1 SCOPE	<p>General: This Appendix specifies additional dimensional and constructional requirements for detachable plug portions, or equipment incorporating integral supply pins or equipment incorporating detachable plug portions.</p> <p>This Appendix shall be read in conjunction with Section 2 of this Standard.</p> <p>For the purposes of this Appendix, where the term 'plug' is used in Section 2 it shall be taken to mean the plug portion of equipment or the detachable plug portion.</p> <p>The equipment shall comply with the relevant product Standard. The tests and requirements specified in this Appendix are in addition to any test and requirements of the relevant product Standard for the equipment. (AS/NZS 3112:2017/A1:2021)</p>	N/A
-------------	---	-----

J2	DEFINITION	N/A
J2.1	Detachable plug portion A plug portion that is detachable from the equipment and with connections including the following standardized outputs and other contacts (a) Type A (see Figure J1):	N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>A detachable plug portion with a connection intended for plugging directly into equipment. The connection being via the equipment group 1 appliance inlet within the scope of AS/NZS 60320.1.</p> <p>(b) Type B (see Figure J2):</p> <p>A detachable plug portion with a non-standardized connection intended for plugging directly into equipment</p> <p>(c) Type C (see Figure J3):</p> <p>A detachable plug portion with a connection intended for use with an adaptor connected to a flexible cord so as to replicate a supply plug and flexible cord configuration. The connection being via a group 1 appliance outlet within scope of AS/NZS 60320.2.2, which is integral with the plug portion (AS/NZS 3112:2017)</p>		
J2.2	<p>Integral plug portion</p> <p>A plug portion that is integral to the equipment enclosure and is not detachable</p> <p>(AS/NZS 3112:2017)</p>		N/A
J2.3	<p>Plug portion</p> <p>A plug portion is that portion of equipment with pins for insertion into a socket-outlet, including the plug pins, terminals of the plug pins, external dimensions of the 'maximum projection' and any connections of a detachable plug portion.</p> <p>(AS/NZS 3112:2017/A1:2021)</p>		N/A

J3	REQUIREMENTS FOR THE PLUG PORTION		N/A
-----------	--	--	-----

J3.1	<p>General</p> <p>The following provisions apply to the dimensional and constructional requirements of plug portions of equipment and any detachable connection between the plug portion and the equipment:</p>		N/A
(a)	<p>For detachable plug portions intended for connection to the equipment in multiple orientations, the relevant tests are performed in the most onerous orientation.</p>		N/A
(b)	<p>For Type A detachable plug portion, the relevant requirements of AS/NZS 3105:2014 are applicable, in addition to conformance with relevant clauses of this Appendix</p>	<p>See</p> <p>Test Report xxx to AS/NZS 3105:2014</p> <p>Test Report xxx to AS/NZS 60320.1 for the Group 1 appliance inlet portion.</p>	N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
(c)	For Type B detachable plug portions, the conformance is shown by the relevant clauses of this Appendix.		N/A
(d)	For Type C detachable plug portions, conformance is shown by assessment to Section 2 of this Standard (plugs) and relevant clauses of this Appendix (AS/NZS 3112:2017)	See also Test Report xxx to AS/NZS 60320.2.2 for the Group 1 appliance outlet portion.	N/A

J3.2	Plug pins of plug portions The requirements of Clause 2.2 are applicable for plug pins.		N/A
------	---	--	-----

2.2	PLUG PINS		N/A
2.2.1	Current carrying parts of plug pins of metal having sufficient mechanical strength, electrical conductivity and resistance to corrosion adequate for the intended use		N/A
	Plug pin material?		N/A

2.2.3	Plug pins adequately proportioned throughout and portion adjacent to the connection designed to not introduce a stress concentration which may lead to a fracture of the pin, and suitably shaped to prevent abrasion or cutting of conductor strands due to flexure in normal use		N/A
	Exposed ends of plug pins have a lead-in, bevel or radius to facilitate entry into socket-outlets and to operate shutters		N/A
	Flat-pins with the following profile are deemed to comply:		N/A
(a)	Flat-pins with a radius on the end with side bevels may have a width and thickness profile as specified in Figure 2.1(h)		N/A
(b)	Flat-pins square on the end with corner and side bevels may have a width and thickness profile as specified in Figure 2.1(i)		N/A
(c)	Flat-pins square on the end with corner bevels and a radius on the sides may have a width and thickness profile as specified in Figure 2.1(j)		N/A
	Contact portion of the pins smooth and free from openings or indentations		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Flat pin plugs having a longitudinal seam or opening in the contact portion of one face; width not exceeding 0.3 mm and		N/A
	Thickness not exceeding 1.58 mm		N/A
	Exposed portion of earthing pins and pins other than insulated pins free from any non-metallic coverings or coatings (AS/NZS 3112:2017)		N/A
2.2.4	Live parts of insulated pin plugs not exposed when plug is partially or fully engaged with associated socket		N/A
	Compliance by measurement to Figure 2.4	(see appended table)	N/A
	Lacquer, enamel or sprayed insulating coating not considered to be insulation material		N/A
	All live pins on low voltage plugs except for those shown in Figure 2.1 (a2), (b) and (g) of the insulated pin type		N/A
	Colour green or green / yellow not used for insulation of insulated pins (AS/NZS 3112:2017)		N/A

J3.3	Ratings and dimensions for low-voltage plug portions Requirements of clauses 2.8.1 and 2.8.4 apply for rating and dimensions	N/A
------	--	-----

2.8	Ratings and Dimensions of Low Voltage Plugs		N/A
2.8.1	Plugs with ratings up to and including 20A; shall conform to the appropriate dimensions shown in Figure 2.1	(see appended results)	N/A
	Rating of plug	___A	N/A
	Nominal dimensions covering disposition of pins checked by gauge of Appendix A		N/A
	Distance between live pin and edge of moulding to not less than 9 mm		N/A
	Measured distance	___mm	N/A
	No point on plug face protrudes more than 0.5 mm		N/A
	Measured protrusion	___mm	N/A
	Dimensional requirements of Figure 2.1(e2) did not applied to plugs with greater than three pins		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	(AS/NZS 3112:2017)		
2.8.4	Low voltage plugs comply with dimensions of Figure 2.1	(see appended table 2.8.1)	N/A
	Disposition of pins checked by gauge complying with Appendix A, B or F as appropriate		N/A
	Low voltage plug having rating up to 15A and of the Figure 2.1 (a1), (c), (d), (f) or (g) type; comply with dimensional requirements of Figure 2.1 (e1 and e2)		N/A
	20A plug of Figure 2.1 (a2) type complies with dimensional requirements of Figure 2.1 (e2)		N/A
	Plugs with insulated pins need not comply with dimension $R20.0 \pm 1$ mm requirement of Figure 2.1 (e3) provided there is at least 9mm from the edge of the live pins to the edge of the plug face Figure 2.1(e3). (AS/NZS 3112:2017)		N/A
J3.4	Internal connections for plug portions Requirements of clause 2.9 apply for internal connections, unless requirements contained in the relevant product standard (AS/NZS 3112:2017)		N/A
2.9	INTERNAL CONNECTIONS		N/A
	Plug provided with earthing connections designed and constructed so that when plug is correctly wired and assembled:		N/A
(a)	Loose terminal screw or conductive material cannot bridge any live or earthed parts		N/A
(b)	Earthing parts effectively isolated from contact with live conductor which may become detached		N/A
(c)	Live parts effectively isolated from contact with any earthing conductor which may become detached		N/A
	Any connections for auxiliary devices comply with above requirements (AS/NZS 3112:2017)		N/A
J3.5	Arrangement of earthing connections for plug portions Requirements of clause 2.10 apply for arrangement of earthing connections		N/A
2.10	Arrangement of earthing connections		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Earthing pin radial to the circle embracing the pins (AS/NZS 3112:2017)		N/A
J3.6	Configuration of plug portions Requirements of clause 2.12.6 apply for configuration of the plug portion (AS/NZS 3112:2017)		N/A
2.12	Marking		N/A
2.12.6	Configuration of plugs		N/A
	Pins disposed so that configuration, as viewed from the pins, is earth, neutral and active in a clockwise direction		N/A
	Where there is no earthing pin; live pins conform to this configuration (AS/NZS 3112:2017)		N/A
J4	Tests		N/A
J4.1	General Plug portions of equipment shall be subjected to the following tests and unless stated otherwise, shall comply with the requirements specified in Section 2 for each test. The number of test samples shall be in accordance with Table J1 For equipment with a detachable plug portion, the assessment(s) of Table J1 tests 2, 3, 5, 10 and 11 shall be conducted on the— (a) assembled equipment with the detachable plug portion connected; and (b) the detachable plug portion after it has been separated from the equipment (AS/NZS 3112:2017/A1:2021)		N/A
J4.2	High voltage test The requirements of Clause 2.13.3 are applicable unless requirements are contained in the relevant product standard (AS/NZS 3112:2017)		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

2.13.3	Test No.1 - High voltage test		N/A
	Plug withstands without failure electric strength test as specified (AS/NZS 3112:2017)	(see appended table)	N/A

J4.3	Mechanical strength		N/A
J4.3.1	Tumbling barrel test The tumbling barrel test is applied to determine the mechanical strength of the plug portions and equipment having integral or detachable plug portions. For equipment with a detachable plug portion, the detachable plug portion may become detached during the test. If this occurs the detachable plug portion shall be reassembled with the equipment when the pins are straightened as per (a) and (b) below. Three samples (Samples BCD in Table J1) that have not been subjected to any previous test are tested as specified in Clause 2.13.7.1 , however the test is modified as follows:		N/A
	They are tested in a tumbling barrel as described in AS 60068.2.32 or test Free fall repeated – Procedure 2 in IEC 60068-2.31. The samples shall be dropped from a height of 500 mm onto a steel plate, 3 mm thick. The barrel shall be turned at a rate of 5 r/min, to yield 10 falls per minute. Only one sample shall be tested at a time. A sample is dropped— (a) 500 times if the mass of the specimen does not exceed 250 g. The pins being straightened after each 100 drops and at the completion of the test to pass through the appropriate gauge of Figure A1 , Figure B1 or Figure F1 ; and (b) 250 times if the mass of the specimen exceeds 250 g. The pins being straightened after each 25 drops and at the completion of the test to pass through the appropriate gauge of Figures A1 , Figure B1 or Figure F1 . (AS/NZS 3112:2017/A1:2021)		N/A
	Mass of sample	_____ Grams	N/A
	Number of drops	500 / 250	N/A
	Compliance shall be checked by Paragraph J4.3.3	(See appended table)	N/A

J4.3.2	Test No.3 Impact test.		N/A
--------	-------------------------------	--	-----

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

	<p>Plug portions and equipment having integral plug portions or detachable plug portions shall withstand lateral impact forces.</p> <p>All samples that were subjected to the tests in Paragraph J4.3.1 (Samples BCD in Table J1) shall be tested as follows:</p>		
	(a) The sample shall be positioned at the centre of a steel plate with a thickness of at least 6 mm. Apertures in the steel plate for the plug pins to pass through shall conform to the corresponding socket Standard. The sample shall be held against the steel plate by clamping all the pins.		N/A
	(b) Samples shall be subjected to blows, with an impact energy of 1.0 ± 0.05 J by any means having the same performance as the spring-operated impact-test apparatus of AS/NZS 3100.		N/A
	(c) Three blows shall be applied to every point that is most likely to directly or indirectly stress the enclosure joints of the sample		N/A
	Compliance shall be checked by Paragraph J4.3.3		N/A

J4.3.3	<p>Specific compliance criteria</p> <p>This Paragraph provides the common compliance assessment criteria for tests specified in Paragraphs J4.3.1 and J4.3.2.</p>		N/A
	Following each test, the samples shall comply with Clause 2.13.7.1		N/A
(a)	assembled equipment with the detachable plug portion connected;		N/A
	After the test, samples show no damage	(See appended table)	N/A
(b)	the detachable plug portion after it has been separated from the equipment.		N/A
	After the test, samples show no damage	(See appended table)	N/A
4.3.4	<p>Pin bending test</p> <p>The pins of the plug portion of three samples (Samples EFG in Table J1) not subjected to any previous tests shall be tested for compliance with the pin bending test of Clause 2.13.7.2 (AS/NZS 3112:2017/A1:2021)</p>		N/A

2.13.7.2	Test No.4 – Pin bending test		N/A
	All flat-pin plugs rated up to and including 15 A shall be subjected to the pin bending test		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Three samples are subjected by clamping the plug in a rigid holding block and applying the bending force as specified		N/A
	After the test the pins shall not be broken off. (AS/NZS 3112:2017)		N/A

J4.8.3	Test No.5 Plug portion detachment requirements		N/A
	For all Type B or C devices and for Type A devices where the outlet of the detachable plug portion is parallel to the plug supply pins, disengagement of the detachable plug portion from the equipment shall require at least two simultaneous independent actions or the use of a tool.		N/A
	The plug portion and the equipment/adaptor shall be connected and disconnected 50 times (100 strokes).		N/A
	Compliance is verified by the plugging test, a force which, over a period of 10 s, shall be increased steadily to 60 ± 0.6 N and held at this value for a further 10 s, shall be applied evenly at the connecting equipment in a direction parallel to the pins. This procedure shall be conducted three times on the same plug portion, at intervals of 5 min, without disturbing the plug portions between tests		N/A
	During the test the plug portion shall not separate		N/A
	The test of AS/NZS 3112 'temperature rise test' for plugs shall be conducted immediately after the above test without disturbing the sample. Test No 6 Temperature Rise test J4.4 (AS/NZS 3112:2017/A1:2021)		N/A

J4.4	Temperature rise test The relevant requirements of Clause 2.13.8 are applicable for the temperature rise test, except that the test current shall be that specified in the relevant product standard		N/A
	The temperature rise of the pins shall not exceed 45 K irrespective of the temperature rise of parts specified in end-product standards.		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

	For detachable plug portions the temperature rise of terminals and contacts shall not exceed 45 K. (AS/NZS 3112:2017)		N/A
--	--	--	-----

2.13.8	Test No.6 – Temperature rise test		N/A
	Plug tested in draught free environment as specified using clamping units as specified in Figure 2.10		N/A
	Test Current Relevant Product Standard	_____ Amps _____ (Standard?)	N/A
	Temperature of terminals and contacts of detachable plug portion not exceeding 45 K (AS/NZS 3112:2017)	(see appended table)	N/A

J4.5	Securement of pins of the plug portion The requirements of Clause 2.13.9 are applicable for the securement of pins. (AS/NZS 3112:2017)		N/A
------	---	--	-----

2.13.9	Test No.7. Securement of pins		N/A
2.13.9.1	Movement of pins		N/A
	Plug pins clamped 5 ± 0.5 mm from pin face; test equipment and sample pre-conditioning for 1 h at $40 \pm 1^\circ\text{C}$		N/A
	Force of 18 ± 1 N applied to pin 14 ± 0.5 mm from plug face; applied gradually over 10 s and maintained for 10 s; applied in four directions		N/A
	Maximum deflection during test not exceeding 2.0 mm	(see appended results)	N/A
	Any distortion 5 minutes after test does not prevent insertion of plug into standard gauge(s) (AS/NZS 3112:2017 + A1:2021)		N/A
2.13.9.2	Fixing of pins		N/A
	Plug heated to $50 \pm 2^\circ\text{C}$ for 1h		N/A
	Force of 60 ± 0.6 N applied to each pin over 10 s and maintained for 10 minutes; applied in two directions along length of pin		N/A
	Maximum displacement during test not exceeding 2.4 mm		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Maximum measured displacement		N/A
	Pin returns to within 0.8 mm of nominal length within 5 minutes of removal of test force (AS/NZS 3112:2017)		N/A

J4.6	Tests on the insulation material of insulated pin-plug portions The requirements of Clause 2.13.13 are applicable for insulating material of insulated plug pins. (AS/NZS 3112:2017)		N/A
------	---	--	-----

2.13.13	Test No.8 Tests for insulation material of insulated pin plugs		N/A
2.13.13.1	Material of pin-insulation resistant to stresses at temperature likely to occur		N/A
2.13.13.2	Pressure test at high temperature		N/A
	Specimen tested as per Figure 2.5 with force of 2.5 N applied as specified; maintained for 2 h at $160 \pm 5^{\circ}\text{C}$; removed and cooled by immersion in water within 10 s		N/A
	Thickness of insulation at point of impression not reduced by more than 50%		N/A
	Initial thickness	mm	N/A
	Thickness after test	mm	N/A
	No visible cracks on insulation material		N/A
	Dimension of insulating material not below minimum size in Figure 2.4 (AS/NZS 3112:2017)		N/A

2.13.13.3	Static damp heat test		N/A
	Specimen subjected to two damp heat cycles in accordance with IEC 60068-2-30; Db (12 + 12h), 95% RH, $25 \pm 3^{\circ}\text{C}$; 40°C		N/A
	After this treatment and recovery to room temperature; specimen subjected to:		N/A
(a)	Insulation resistance test in accordance with clause 2.13.2 (e)	(see appended table)	N/A
(b)	High voltage test in accordance with clause 2.13.3	(see appended table)	N/A
(c)	Abrasion test in accordance with clause 2.13.13.6		N/A
2.13.13.4	Low temperature test		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Plug maintained at $-15 \pm 2^{\circ}\text{C}$ for minimum of 24 h and returned to room temperature; after which specimen subjected to:		N/A
(a)	Insulation resistance test in accordance with clause 2.13.2 (e)	(see appended table)	N/A
(b)	High voltage test in accordance with clause 2.13.3	(see appended table)	N/A
(c)	Abrasion test in accordance with clause 2.13.13.6		N/A
2.13.13.5	Impact test at low temperature		N/A
	Specimen maintained at $-15 \pm 2^{\circ}\text{C}$ for 24 h		N/A
	Specimen placed in position and subjected to impact test as per Figure 2.6; mass of 100 ± 1 g falling through 100 mm		N/A
	Four impacts applied; specimen rotated through 90° between impacts		N/A
	After return to room temperature; no visible cracks of insulating material		N/A
2.13.13.6	Abrasion test		N/A
	Plug held in clamp and tested as per Figure 2.7; pin loaded at 4 N; 20 000 movements		N/A
	After test; pins show no damage affecting safety or impairing further use of the plug		N/A
	Insulating sleeve not punctured or rucked up (AS/NZS 3112:2017)		N/A

J4.7	Test no.9 Equipment with a plug portion intended to be supported by the contacts of a socket-outlet		N/A
	Equipment with pins intended to be introduced into fixed socket-outlets not imposing undue strain on socket-outlet		N/A
	Applied torque not exceeding 0.25 Nm		N/A
	Measured torque (AS/NZS 3112:2017)	____Nm	N/A

J4.8	Additional requirements for detachable plug portions		N/A
J4.8.1	Test no.10 Access to live parts		N/A
	Small test finger of Figure 13 of IEC 61032 was not possible to contact live parts with the force of 20N		N/A
	incorrectly assemble the plug portion was not possible		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	(AS/NZS 3112:2017)		

J4.8.2	Test No.11 Construction of detachable contacts where the input current of the equipment exceeds 0.2 A		N/A
	Contacts of the equipment shall be such that they make and maintain, under normal service conditions, satisfactory electrical and mechanical contact with the corresponding contact of the detachable plug portion.		N/A
	For connections intended to accommodate pins, contact shall be made on two surfaces diametrically opposite, except if a single spring-assisted contact is used. (AS/NZS 3112:2017/A1:2021)		N/A
	Contacts shall not rely exclusively on the resilience of the contact material and shall have an opposite face of material other than thermoplastic or resilient insulating material. (AS/NZS 3112:2017/ A1:2021)		N/A
	The alignment and contact-making properties of contacts shall be independent of terminal screws		N/A
	The effectiveness of the contacts shall be independent of pressure from any thermoplastic or resilient moulding.		N/A
	A visual inspection is conducted to determine the existence of interference between the metal contacts and the thermoplastic or resilient moulding to provide supplementary contact pressure to the metal contacts.		N/A
	Conformance of the effectiveness of the contacts is checked by inspection and by the inspection and tests in J4.8.3 (AS/NZS 3112:2017)		N/A

J4.8.4	Resistance of insulating material to heat and fire		N/A
J4.8.4.1	Test no.12 Resistance to heat For Type B detachable plug portions parts of non-metallic material, parts of insulating material supporting live parts including connections, and parts of thermoplastic material providing supplementary insulation or reinforced insulation, shall be sufficiently resistant to heat if their deterioration could cause the appliance to fail to comply with this Standard.		N/A
	Ball pressure test conducted in accordance with IEC 60695-10-2		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
(a)	75°C ± 2°C, for external parts;		N/A
(b)	125°C ± 2°C, for parts supporting live parts.		N/A

J4.8.4.2	Test no.13 Resistance to fire		N/A
	Plug portions comply with resistance to fire requirements of AS/NZS 3100 Annex A as follows:		N/A
	The glow wire test temperature 'T' for 'retaining parts' of fixed socket outlets shall be 750 C (AS/NZS 3112:2017)		N/A

TABLES OF RESULTS

2.2.4	TABLE: Dimensions of insulation on insulated pin plugs		N/A
	Dimension (Figure 2.1 designation)	Measured (mm)	Allowed (mm)
	Phase pin		8.7 ± 0.5
	Neutral pin		8.7 ± 0.5

2.8.1	TABLE: Dimensions of plugs- 10A (a1)		N/A
	Dimension (Figure 2.1 designation)	Measured (mm)	Allowed (mm)
	Phase and neutral pin width (A)		6.35 ± 0.15
	Earth pin width (B)		6.35 ± 0.15
	Pin thickness (C)		1.63 + 0.15, -0.05
	Pin disposition (D)		checked by test gauge
	Pin disposition (E)		checked by test gauge
	Phase and neutral pin length (F)		17.06 ± 0.4
	Earth pin length (G)		19.94 ± 0.8
	Pin boss radius - maximum		21.0 max
	Pin boss height		8.6 min

2.8.1	TABLE: Dimensions of plugs- 15A (a1)		N/A
	Dimension (Figure 2.1 designation)	Measured (mm)	Allowed (mm)
	Phase and neutral pin width (A)		6.35 ± 0.15

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Earth pin width (B)		9.08 ± 0.15
	Pin thickness (C)		1.63 + 0.15, -0.05
	Pin disposition (D)		checked by test gauge
	Pin disposition (E)		checked by test gauge
	Phase and neutral pin length (F)		17.06 ± 0.4
	Earth pin length (G)		19.94 ± 0.8
	Pin boss radius - maximum		21.0 max
	Pin boss height		8.6 min

2.8.1	TABLE: Dimensions of plugs-20A (a2)	N/A	
Dimension (Figure 2.1 designation)	Measured (mm)	Allowed (mm)	
Phase and neutral pin width (A)		9.08 ± 0.15	
Earth pin width (B)		9.08 ± 0.15	
Pin thickness (C)		1.63 + 0.15, -0.05	
Pin disposition (D)		checked by test gauge	
Pin disposition (E)		checked by test gauge	
Phase and neutral pin length (F)		17.06 ± 0.4	
Earth pin length (G)		19.94 ± 0.8	
Pin boss radius - maximum		21.0 max	
Pin boss height		8.6 min	

2.8.1	TABLE: Projection from plug face centroid	N/A	
Direction of projection	Measured (mm)	Allowed (mm)	
Left		≤ 21.9 or ≥ 27.0	
Right		≤ 21.9 or ≥ 27.0	
Up		≤ 21.9 or ≥ 27.0	
Down		≤ 21.9 or ≥ 27.0	

2.13.3	TABLE: Test No. 1 – High voltage test	N/A	
Test voltage applied between:	Test voltage (V)	Breakdown	
All poles of the plug; taken in pairs	1000	Yes / No	
Live poles of the plug and any external metal	3500	Yes / No	

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Live poles of the plug and the earthing terminal	1000	Yes / No
	Live poles of the plug and a flexible electrode	3500	Yes / No
	Live poles and metal foil applied around insulation on pins	1250	Yes / No

2.13.7.1	Test No.2 – Tumbling barrel test		N/A
	Following the test, the samples shall comply with Clause 2.13.7.1(a..e)		N/A
	(a) Live parts shall not have become exposed to the standard test finger		N/A
	(b) For earth pins, the resistance of the plug/socket-outlet circuit shall be such that conformance with Clause 3.14.7 is maintained. AS/NZS 3100 Cl 8.5 The resistance shall not exceed 0.1 Ω	___ Ω .	N/A
	(c) Any other function affecting safety shall not be impaired		N/A
	(d) No live part shall have become detached or loosened, to the extent that a hazardous situation is created (see Clause 2.9)		N/A
	(e) The pins shall be inspected with normal, or corrected to normal, vision. Insulation may be removed if necessary. Pins shall not be broken or show cracking		N/A

	Test No.3 Impact test for assembled equipment with the detachable plug portion connected and for equipment with an integral plug portion.		N/A
	Following the test, the samples shall comply with Clause 2.13.7.1 (a..e) as follows:		N/A
	(a) Live parts shall not have become exposed to the standard test finger (Figure 8.10 in AS/NZS 3100 or Test Probe B in IEC 61032)		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>(b) For earth pins, the resistance of the plug/socket-outlet circuit shall be such that conformance with Clause 3.14.7 is maintained so that the resistance between the earthing terminal of any socket-outlet provided with an earthing contact and the earthing terminal of the plug used for testing shall be of a low resistance. Compliance is by the test of earthing connection in AS/NZS 3100 Clause 8.5.</p> <p>The resistance shall not exceed 0.1 Ω</p>	___ Ω .	N/A
	(c) Any other function affecting safety shall not be impaired		N/A
	(d) No live part shall have become detached or loosened, to the extent that a hazardous situation is created		N/A
	(e) The pins shall be inspected with normal, or corrected to normal, vision. Insulation may be removed if necessary. Pins shall not be broken or show cracking.		N/A
	Following the test, the samples shall conform to the 'Guarding of live parts' requirements of AS/NZS 3100:2015 cl 5.1 as follows:		N/A
	Except for equipment intended for use only in a position not accessible to unauthorized persons, all equipment shall be so designed and constructed that, when the equipment is standing, supported, or fixed, in a normal manner, no person can inadvertently come into contact with any live part		N/A
	If a hole giving access to preset controls is marked as such on the enclosure or reference made to it in the instructions and the setting of this control requires a screwdriver or other tool, the adjustment of the control shall not allow contact with any live parts. A metal test pin having a diameter of 2 mm and a length of 100 mm shall not become live when it is inserted through the hole in every position with a force of 10 N.		N/A
	In addition, the opening or removal of any cover or component, with or without tools, where such opening or removal is necessary as a normal operation of the equipment as distinct from maintenance, repairs, or adjustment, shall not expose live parts to inadvertent personal contact.		N/A
	Any metal cover or casing enclosing live parts shall be of a strength sufficient to ensure that it cannot be deformed readily so as to come into contact with live parts.		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance is checked by inspection, test and checking that live parts shall not have become exposed to the standard test finger (Figure 8.10 in AS/NZS 3100 or Test Probe B in IEC 61032)		N/A
	Class II equipment and class II constructions shall be constructed and enclosed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only.		N/A
	It shall only be possible to touch parts which are separated from live parts by double insulation or reinforced insulation.		N/A
	Compliance is checked by application of the standard test finger (Figure 8.10 in AS/NZS 3100 or Test Probe B in IEC 61032)		N/A
	Following the test, the samples shall conform to the 'Separation of live parts from non-current-carrying conductive parts' requirements of AS/NZS 3100.CI 5.2.2 as follows:		N/A
	The support and insulation of every live part shall be such as will ensure that no live part can make contact with any non-current-carrying conductive part exposed to personal contact.		N/A
	In respect of terminals of components such as switches, adequate clearances shall be maintained or insulation shall be provided to prevent contact of the terminals, or loose strands of flexible cords intended to be terminated therein, with exposed conductive parts. Where necessary, provision shall be made to ensure that conductors protruding through terminals, when normally connected, will not contact exposed conductive parts.		N/A
	Compliance is checked by inspection.		N/A

	Test No.3 Impact test for the detachable plug portion after it has been separated from the equipment		N/A
	Following the test, the samples shall comply with Clause 2.13.7.1 (a..e)		N/A
	(a) Live parts shall not have become exposed to the standard test finger (Figure 8.10 in AS/NZS 3100 or Test Probe B in IEC 61032)		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	(b) For earth pins, the resistance of the plug/socket-outlet circuit shall be such that conformance with Clause 3.14.7 is maintained so that the resistance between the earthing terminal of any socket-outlet provided with an earthing contact and the earthing terminal of the plug used for testing shall be of a low resistance. Compliance is by the test of earthing connection in AS/NZS 3100 Clause 8.5. The resistance shall not exceed 0.1 Ω	___ Ω .	N/A
	(c) Any other function affecting safety shall not be impaired		N/A
	(d) No live part shall have become detached or loosened, to the extent that a hazardous situation is created		N/A
	(e) The pins shall be inspected with normal, or corrected to normal, vision. Insulation may be removed if necessary. Pins shall not be broken or show cracking.		N/A
	Following the test, the samples shall conform to the 'Guarding of live parts' requirements of AS/NZS 3100:2015 cl 5.1 as follows:		N/A
	Except for equipment intended for use only in a position not accessible to unauthorized persons, all equipment shall be so designed and constructed that, when the equipment is standing, supported, or fixed, in a normal manner, no person can inadvertently come into contact with any live part		N/A
	If a hole giving access to preset controls is marked as such on the enclosure or reference made to it in the instructions and the setting of this control requires a screwdriver or other tool, the adjustment of the control shall not allow contact with any live parts. A metal test pin having a diameter of 2 mm and a length of 100 mm shall not become live when it is inserted through the hole in every position with a force of 10 N.		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	In addition, the opening or removal of any cover or component, with or without tools, where such opening or removal is necessary as a normal operation of the equipment as distinct from maintenance, repairs, or adjustment, shall not expose live parts to inadvertent personal contact.		N/A
	Any metal cover or casing enclosing live parts shall be of a strength sufficient to ensure that it cannot be deformed readily so as to come into contact with live parts.		N/A
	Compliance is checked by inspection, test and checking that live parts shall not have become exposed to the standard test finger (Figure 8.10 in AS/NZS 3100 or Test Probe B in IEC 61032)		N/A
	Class II equipment and class II constructions shall be constructed and enclosed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only.		N/A
	It shall only be possible to touch parts which are separated from live parts by double insulation or reinforced insulation.		N/A
	Compliance is checked by application of the standard test finger (Figure 8.10 in AS/NZS 3100 or Test Probe B in IEC 61032)		N/A
	Following the test, the samples shall conform to the 'Separation of live parts from non-current-carrying conductive parts' requirements of AS/NZS 3100.C1 5.2.2 as follows:		N/A
	The support and insulation of every live part shall be such as will ensure that no live part can make contact with any non-current-carrying conductive part exposed to personal contact.		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	In respect of terminals of components such as switches, adequate clearances shall be maintained or insulation shall be provided to prevent contact of the terminals, or loose strands of flexible cords intended to be terminated therein, with exposed conductive parts. Where necessary, provision shall be made to ensure that conductors protruding through terminals, when normally connected, will not contact exposed conductive parts.		N/A
	Compliance is checked by inspection.		N/A

2.13.8	TABLE: Test No. 6 - Temperature rise test		N/A
	Ambient temperature	°C	--
	Test current	A	--
Measured part		dT measured (K)	dT allowed (K)
Active (phase) terminal			45
Neutral terminal			45
Earthing terminal			45

2.13.9.1	TABLE: Movement of pins		N/A
	Earth and neutral pins clamped – phase pin loaded		--
Force direction		Measured deflection (mm)	Allowed deflection (mm)
Force towards neutral plane parallel to pin plane			2.0
Force from neutral plane parallel to pin plane			2.0
Force outwards at 90° to pin plane			2.0
Force inwards at 90° to pin plane			2.0

2.13.9.1	TABLE: Movement of pins		N/A
	Phase and neutral pins clamped – earth pin loaded		--
Force direction		Measured deflection (mm)	Allowed deflection (mm)
Force inwards parallel to pin plane			2.0
Force outwards parallel to pin plane			2.0
Force towards neutral			2.0
Force towards phase			2.0

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

2.13.9.1	TABLE: Movement of pins		N/A
	Phase and earth pins clamped – neutral pin loaded		--
	Force direction	Measured deflection (mm)	Allowed deflection (mm)
	Force towards phase plane parallel to pin plane		2.0
	Force from phase plane parallel to pin plane		2.0
	Force outwards at 90° to pin plane		2.0
	Force inwards at 90° to pin plane		2.0

2.13.13.3	TABLE: Test No.13(b) – Insulation resistance test after static damp heat test		N/A
	Applied between:	Insulation resistance (MΩ)	Minimum required (MΩ)
	Live poles and metal foil applied around insulation on pins		5

2.13.13.3	TABLE: Test No.1 – High voltage test after static damp heat test		N/A
	Test voltage applied between:	Test voltage (V)	Breakdown
	Live poles and metal foil applied around insulation on pins	1250	Yes / No

2.13.13.4	TABLE: Test No.1 – Insulation resistance test after low temperature test		N/A
	Applied between:	Insulation resistance (MΩ)	Minimum required (MΩ)
	Live poles and metal foil applied around insulation on pins		5

2.13.13.4	TABLE: Test No.1 – High voltage test after low temperature test		N/A
	Test voltage applied between:	Test voltage (V)	Breakdown
	Live poles and metal foil applied around insulation on pins	1250	Yes / No

J4.8.4.1	TABLE: Test no.12 Resistance to heat		N/A
	Component tested	Temperature (°C)	Diameter of impression (mm)

Conformance is checked by subjecting the relevant part to the ball pressure test of IEC 60695-10-2.

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
J4.8.4.2	TABLE: Test no.13 Resistance to Fire		N/A
	Plug portions shall comply with the requirements for resistance to fire in accordance with AS/NZS 3100:2017 Annex A. The glow-wire test temperature 'T' shall be 750°C.		N/A

Glow-wire testing was conducted in accordance with IEC 60695-2-11.

Test specimens arranged so that the surface in contact with the tip of the glow-wire was vertical and glow wire tip applied to surface of the specimen likely to be subjected to thermal stresses in normal use.

A layer of white pine board and wrapping tissue was placed beneath the sample at 200mm ± 5mm distance.

IEC62368_1E – ATTACHMENT

Clause	Requirement + Test							Result - Remark	Verdict
SPECIMEN NUMBER	1	2	3	4	5	6	7	8	
SPECIMEN DESCRIPTION									
Material									
Colour									
Test specimen									
Glow wire tip temperature (°C)	750	750	750	750	750	750	750	750	
Duration of glow wire application (t _a) (s)	30	30	30	30	30	30	30	30	
OBSERVATIONS									
Duration from beginning of glow-wire tip application to ignition of specimen or layer (t _i) (s)									
Duration from beginning of glow-wire tip application to when flames extinguish (t _e) (s)									
Maximum height of flames after initial 1s (to nearest 5 mm) (mm)									

IEC62368_1E – ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
Flame impingement on other parts			
Degree of tip penetration			
Degree of specimen distortion			
Scorching of pinewood board			
EVALUATION CRITERIA			
Visible flame or sustained glowing			
Visible Flame Duration in Seconds during test.			
Duration of flaming or glowing after tip removal (max. allowable 30 s) (s)			
Surrounding parts burned away completely (not permitted)			
Ignition of wrapping tissue layer (not permitted)			

IEC62368_1E – ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
RESULTS If parts tested withstand the glow-wire test, but during the test produce a flame that persists for longer than 2 s, then the consequent needle flame test of AS/NZS 3100:2017 Annex A 6.1.5 applies.			

- LEGEND:
- | | | |
|------------------------------|-----------------------------------|--------------------------------------|
| CE Complete Equipment | SA Sub Assembly | SE Self Extinguished |
| EBD Emitted Burning Droplets | SBD Specimen Burned and Distorted | SMD Specimen Melted and Distorted |
| ME Manually Extinguished | SC Separate Component | SS Specimen Scorched |
| NA Not Applicable | SCC Specimen Completely Consumed | WPNI Wall Penetrated but no Ignition |
| NI No Ignition | X Flame Appeared for an Instant | |

TABLE: Needle- flame test (NFT)					
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict

Supplementary information:
 - NFT not relevant (or applicable) for Parts of material classified as V-0 or V-1
 - NFT not relevant (or applicable) for Base material of PCBs classified as V-0 or if relevant VTM-0

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 62368-1:2018 Republic of Korea NATIONAL DIFFERENCES Audio/video, information and communication technology equipment - Part 1: Safety requirements			
Differences according to: KC 62368-1(2021-08)			
TRF template used:: IECEE OD-2020-F3, Ed. 1.2			
Attachment Form No.: KR_ND_IEC62368_1E			
Attachment Originator: KTL			
Master Attachment: 2024-09-02			

Copyright © 2024 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

National Differences		--
4.1.1	As of January 1, 2023, internal and external components and subassemblies that comply with IEC 60950-1 or IEC 60065 are not acceptable if those components and subassemblies mandates KC certification.	P
G.4.2	Plugs for the connection of the apparatus to the supply main shall comply with the Korean requirement (KS C 8305 or KC 60884-1 or KC 60799).	P
Special national conditions (if any)		P
Voltage	The marking of rated voltage or rated voltage range, for appliances intended to be connected to the supply mains, shall include 110 V, 220 V or 380 V.	P
Frequency	Only appliances having supply frequency of 60 Hz or a frequency range including 60 Hz are accepted.	P
Instruction	Instruction manuals and appliance marking related safety, including nameplate shall be in Korean	P

-----End-----

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 62368-1:2018 CHINA NATIONAL DIFFERENCES (Audio/video, information and communication technology equipment -Part 1: Safety requirements)			
Differences according to.....: GB 4943.1-2022			
TRF template used:..... : IECEE OD-2020-F3, Ed. 1.1			
Attachment Form No.: CN_ND_IEC62368_1E			
Attachment Originator: CQC			
Master Attachment: Dated 2022-12-01			
Copyright © 2020 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		
4.1.2	Use of components Add a paragraph: A component used shall comply with related requirements corresponding altitude of the equipment.	See appendix table 4.1.2	P
4.11	Add clause 4.11,as follows: Protection in PRIMARY CIRCUITS against overcurrent short-circuits and earth faults shall be provided as an integral part of the equipment except the device shall meet the all requirement of Fault conditions. If pluggable equipment type B or permanently connected equipment depends on protective devices outside the equipment for protection, this shall be stated in the installation instructions of the equipment, with requirements for short-circuit protection, over-current protection ,or both if necessary.		P
5.3.2.2	Contact requirements Amend the 2 nd paragraph of table 8 to be: For equipment intended to be used at altitude of 2000m to 5000m, the values in this table are multiplied by the multiplication factor corresponding altitude of 5000m.	Multiplied by 1.0	N/A
5.4.2.5	Multiplication factors for altitudes higher than 2 000 m above sea level Amend the 1 st paragraph to be: For equipment to be operated at more than 2000 m above sea level and up to 5000m above sea level, the minimum CLEARANCE in tables 10,11 and		N/A

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>14, and resistance test voltages required in table 15, shall meet the requirements of 5000 m above sea level, This is multiplied by the multiplication factor corresponding altitude of 5000m in table 16.</p> <p>For equipment to be used at equal or less than 2000 m above sea level, the minimum CLEARANCE in tables 10, 11 and 14, and resistance test voltages required in table 15, shall meet the requirements of 2000 m above sea level. This is multiplied by the multiplication factor corresponding altitude of 2000m in table 16.</p> <p>Delete note 2 of Clause 5.4.2.5.</p>		
5.4.5.1	<p>General</p> <p>Delete the 2nd paragraph of Clause 5.4.5.1: This test does not apply to equipment where one antenna terminal on the equipment is connected to earth in accordance with 5.6.7.</p> <p>Add the following:</p> <p>The Insulation resistance between CATV antenna coaxial sockets and protective earth of apparatus shall comply with BASIC INSULATION. If it's possible that CLASS II apparatus with CATV antenna coaxial sockets connect with protective earth of another CLASS I apparatus by other terminals, the insulation resistance between them shall comply with BASIC INSULATION as well.</p> <p>If antenna cable separated from the protective earth before connection to the apparatus, there is no requirements of Insulation resistance between them but F.4 requirements shall be meet.</p> <p>Delete "NOTE" of Clause 5.4.5.1</p>		N/A
5.4.8	<p>Humidity conditioning</p> <p>Amend clause 5.4.8 as follows :</p> <p>The humidity conditioning is conducted for 120 h in a cabinet or room containing air with ambient temperature (40±2) °C and a relative humidity of (93±3)%. During this conditioning, the component or subassembly is not energized.</p> <p>For equipment not to be operated at tropical climatic conditions, humidity conditioning is conducted for 48 h in a cabinet or room containing air with a relative humidity of (93±3) %. The temperature of the air, at all places where samples can be located, is maintained within 2 °C of any convenient value between 20 °C and 30 °C such that condensation does not occur.</p> <p>Add note: For equipment to be operated at 2000 m - 5000m above sea level, assessment and</p>		P

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>requirement of humidity conditioning for Insulation material properties are considered.</p> <p>Pre-processing conditions and requirements below 2000m can be used until additional data is available.</p>		
6.4.9 Y.4.3	Delete references to ASTM and NEMA.		N/A
6.5.1	<p>General requirements</p> <p>Delete the text of the Note “Wire complying with UL 2556 VW-1 is considered to comply with these requirements”.</p>		P
F.1	Amend the second paragraph of annex F.1 to be: Unless symbols are used or otherwise specified, safety related equipment markings, instructions, and instructional safeguards shall be in normative Chinese.		P
F.2.2	<p>After the first paragraph of annex F.2.2 ,add the following:</p> <p>For apparatus intended to be used at altitude not exceeding 2000m, a warning label containing the following or a similar appropriate wording or a symbol shown below shall fixed to the equipment at readily visible place.</p> <p>"Only  used at altitude not exceeding 2000m."</p> <p>For apparatus intended to be used in not-tropical climate regions, a warning label containing the following or a similar appropriate wording or a symbol shown below shall fixed to the equipment at readily visible place.</p> <p>"Only  used in not-tropical climate regions."</p> <p>If only symbol used, the explanation of the symbol shall be contained in the instruction manual.</p> <p>The statements above shall be given in a language acceptable to the regions where the apparatus is intended to be used.</p>		N/A
F.3.3.4	<p>After the last paragraph, Added:</p> <p>…for single rated voltage, “220 V” or three-phase “380V” shall be marked only. For a rating voltage range, 220 V or three-phase 380V shall be covered. For multiple rated voltages, one of them shall be 220 V or three-phase 380V and which default setting from manufacture shall be 220 V or three-phase 380V as well.</p>		P
F.3.3.5	<p>After the last paragraph, Added:</p> <p>Rated frequency shall be 50Hz or frequency range shall cover 50Hz.</p>		P

IEC62368_1E – ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
F.4	<p>Instructions</p> <p>Added:</p> <ul style="list-style-type: none"> - For apparatus incorporating antenna coaxial sockets which is non-separated with CATV network, a warning wording or a similar shall be given in the instruction manual: "A CATV cable intended to be connected to apparatus shall be separated with the protective earth of the apparatus, otherwise fire hazard might be caused." 		N/A
F.5	<p>Instructional safeguards</p> <p>In table F.2 , change 230V to 220V, change 400Y/230V 3Ø to 380 Y/220 V 3Ø</p>		P
G.4.2	<p>Amend clause G.4.2 as follows :</p> <p>Plugs connected to the MAINS in apparatus shall comply with GB/T 1002,GB/T 1003,GB/T 2099.1 or GB/T11918 (All parts) series.</p> <p>Appliance coupler shall comply with GB/T 17465 (All parts) series or GB/T 11918 (All parts) series.</p>	Should be evaluated in national difference approval	N/A
	Special national conditions (if any)		--
0.12	<p>Add clause 0.12</p> <p>Description of relevant information.</p>		P
1	<p>GB 4943.1-2022 applies to equipment used at altitudes not exceeding 5000m above sea level, For apparatus intended to be used at altitude not exceeding 2000m, The requirements can be appropriately reduced, but warning instructions shall be provided..</p> <p>Revise the sixth paragraph of 1 as:</p> <p>In addition to specified by the manufacturer, this document assumes a maximum altitude of 5000m</p>		P
B.2.6.1	<p>Amend T_{ma} as follows:</p> <p>T_{ma} is the maximum ambient temperature permitted by the manufacturer's specification, or 35 °C, whichever is greater.</p> <p>Add note 1: For equipment not to be operated at tropical climatic conditions, T_{ma} is the maximum ambient temperature permitted by the manufacturer's specification, or 25 °C, whichever is greater.</p> <p>Add note 2: For equipment to be operated at 2000m-5000m above sea leave, its temperature test conditions and temperature limits are under consideration. temperature test conditions and temperature limits below 2000m can be used until additional data is available.</p>		P
Annex Z	Added annex Z:		N/A

IEC62368_1E – ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
(normative)	Instructions of the new safety warning labels.		
Annex AA (informative)	Added annex AA: Illustration relative to safety explanation in normative Chinese, Tibetan, Mongolian, Zhuang Language and Uighur.		N/A

-----End-----

Construction of transformer			
Clause	Requirement + Test	Result - Remark	Verdict

G.5.3	TABLE: transformers (T1)						P
Loc.	Tested insulation	Working voltage peak / V (5.4.1.8)	Working voltage rms / V (5.4.1.8)	Required electric strength (5.4.9)	Required clearance / mm (5.4.2.2)	Required creepage distance / mm (5.4.3)	Required distance thr. insul. (5.4.4.6)
T1 Primary winding to secondary pins (RI)	RI	632	250	4000Vdc	3.0	5.0	2 layers or 0.4mm
T1 core to primary pins (BI)	BI	632	250	2500Vdc	1.5	2.5	--
T1 core to secondary pins (SI)	BI	632	250	2500Vdc	1.5	2.5	--
Loc.	Tested insulation			Test voltage/ V	Measured clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers
T1 Primary winding to secondary pins (RI)	RI			4000Vdc	6.2	6.2	2 layers or 0.4mm
T1 core to primary pins (BI)	BI			2500Vdc	2.8	2.8	--
T1 core to secondary pins (SI)	BI			2500Vdc	3.7	3.7	--


Supplementary information:

Concentric windings on core. Core of transformer was considered as intermeddle part. See below table for details.

Construction of transformer			
Clause	Requirement + Test	Result - Remark	Verdict



G.5.3	TABLE: transformers	P	
-------	---------------------	---	--

一、外观图（单位：mm）/DIMENSION

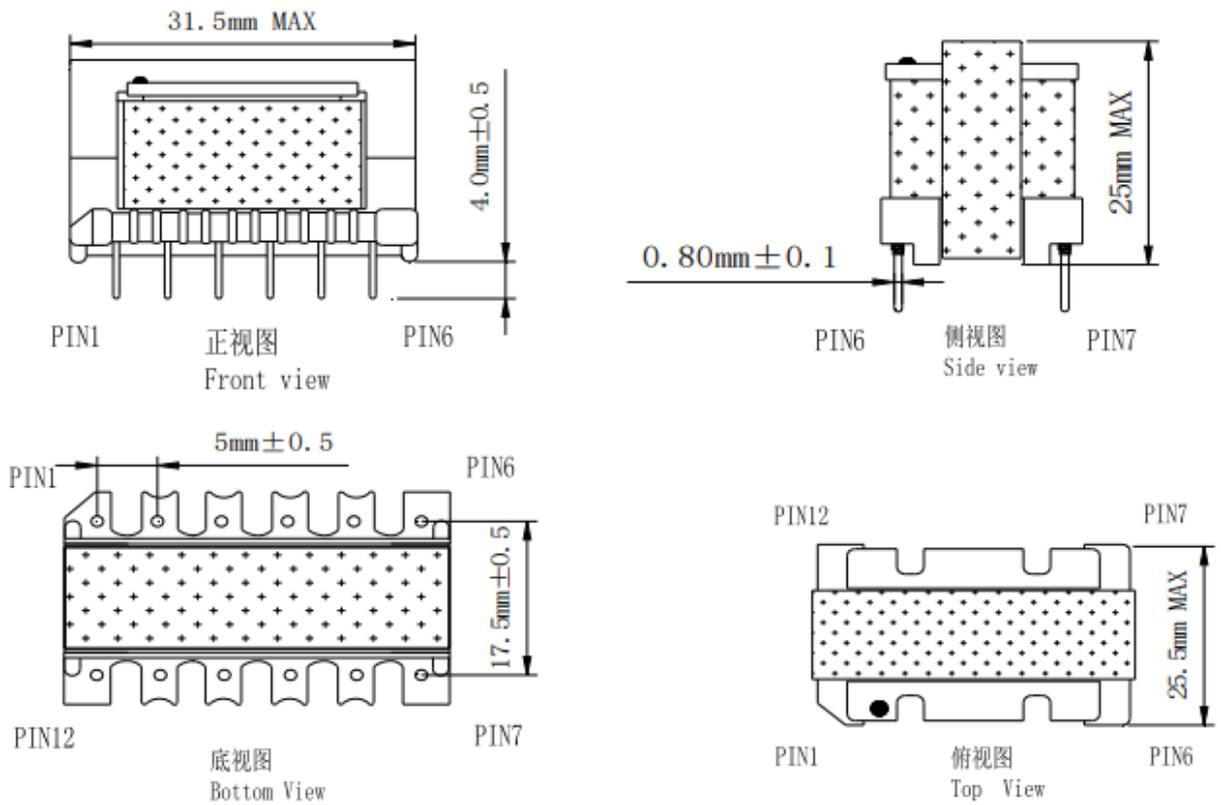

二、绕组结构图/CONSTRUCTION DIAGRAM

三、电原理图/CIRCUIT DIAGRAM

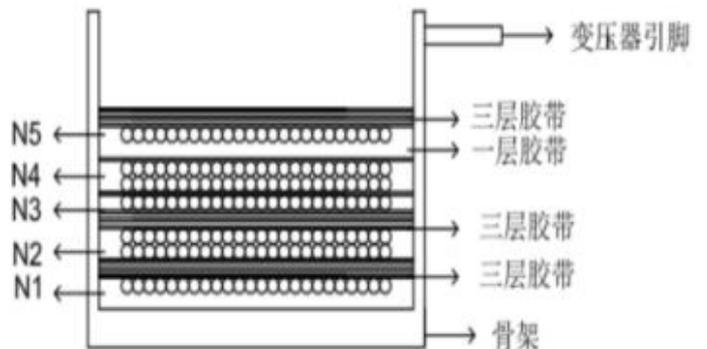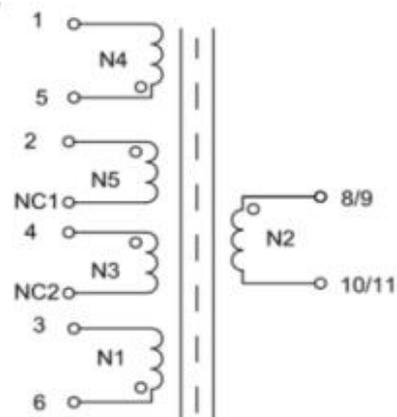

Construction of transformer			
Clause	Requirement + Test	Result - Remark	Verdict

四、绕线表/WINDING:

序号 NO.	起头 STAR	收尾 FINISH	圈数 TURNS	漆包线WIRE	胶带 TAPE	挡墙MARGIN		套管TUBE		绕制方式 WINDING CONDITION
						PIN	TOP	S	F	
N1	6	3	8	TEX-BS, , \varnothing 0.20*1P						密绕
N2	8.9	10.11	25	TEX-BS, \varnothing 0.35*1P						密绕
N3	4	NC2	20	TEX-BS, , \varnothing 0.20*1P						密绕
N4	5	1	45	TEX-BS, , \varnothing 0.30*1P						密绕
N5	2	NC1	20	TEX-BS, , \varnothing 0.20*1P						密绕

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B



Figure 1. External view



Figure 2. External view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B



Figure 3. External view



Figure 4. External view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B



Figure 5. External view

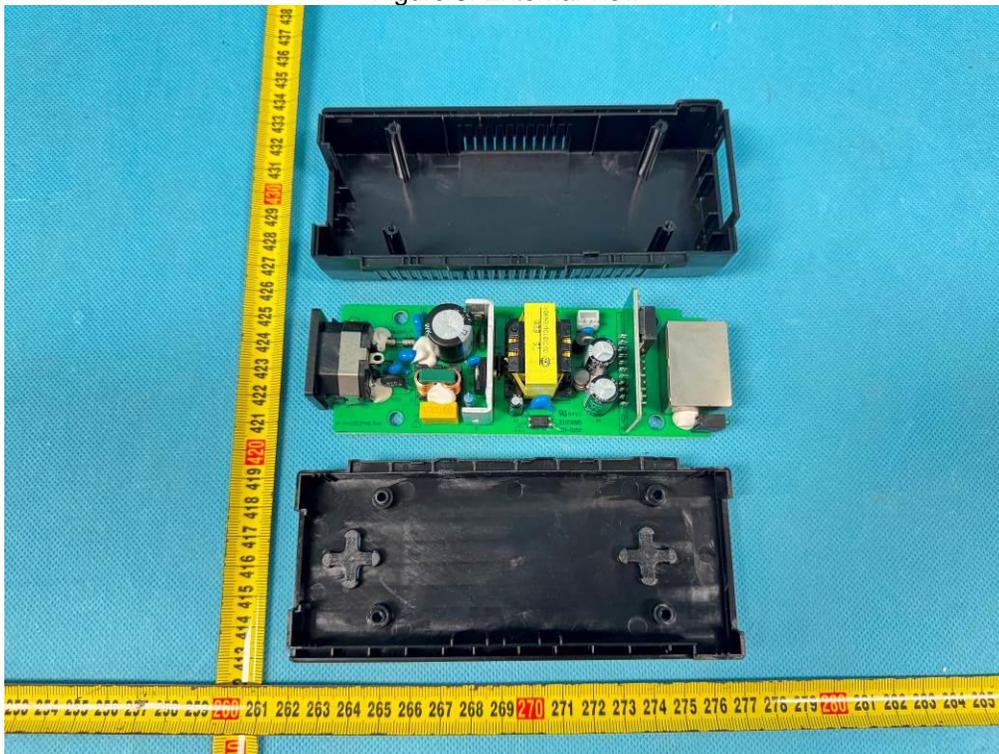


Figure 6. Internal view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B

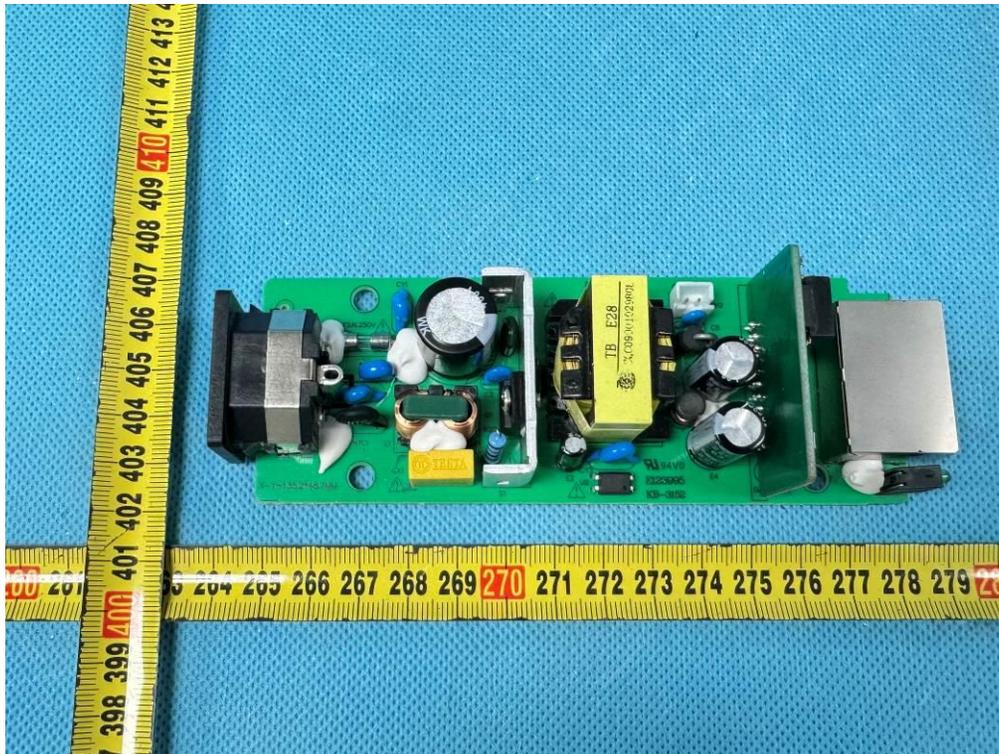


Figure 7. PCB side view

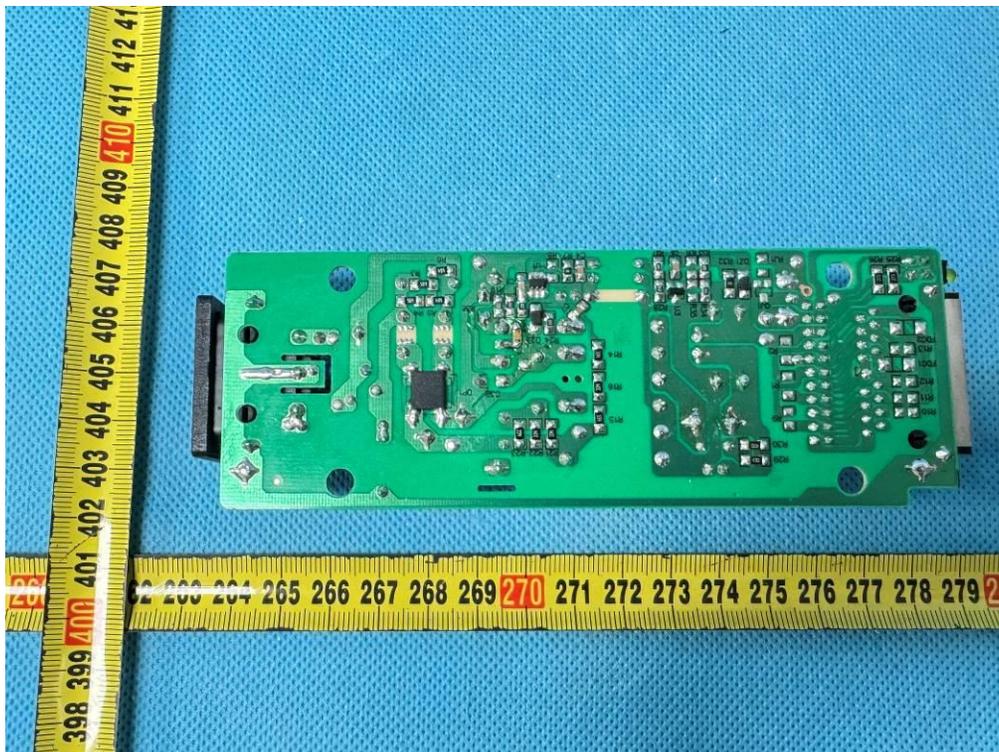


Figure 8. PCB side view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B

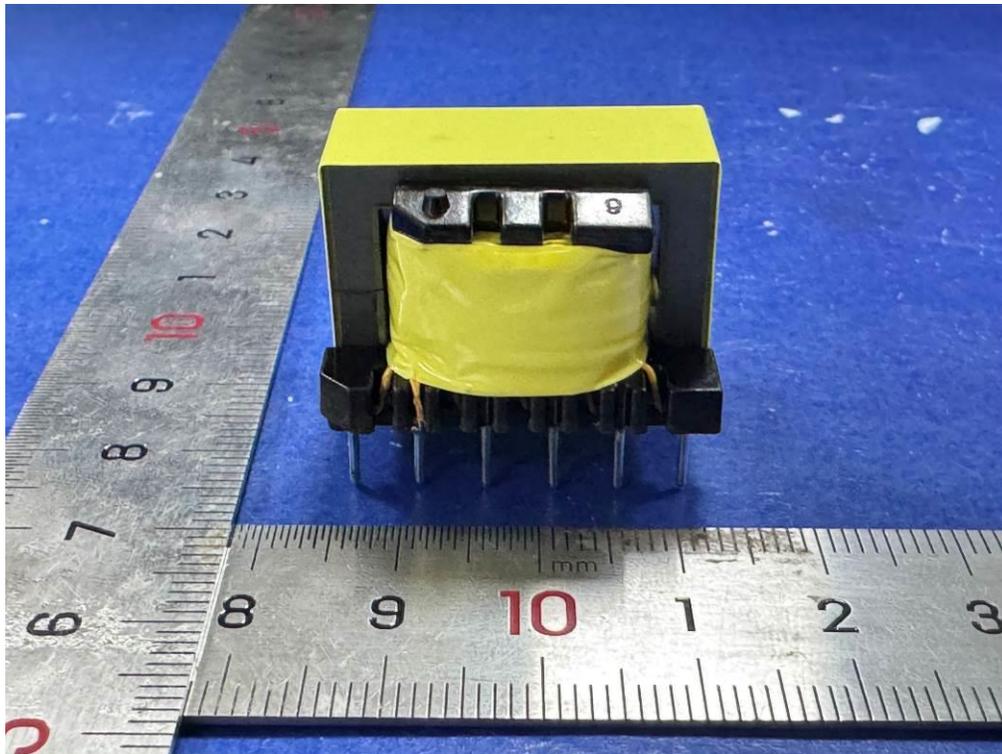


Figure 9. Transformer T1 view

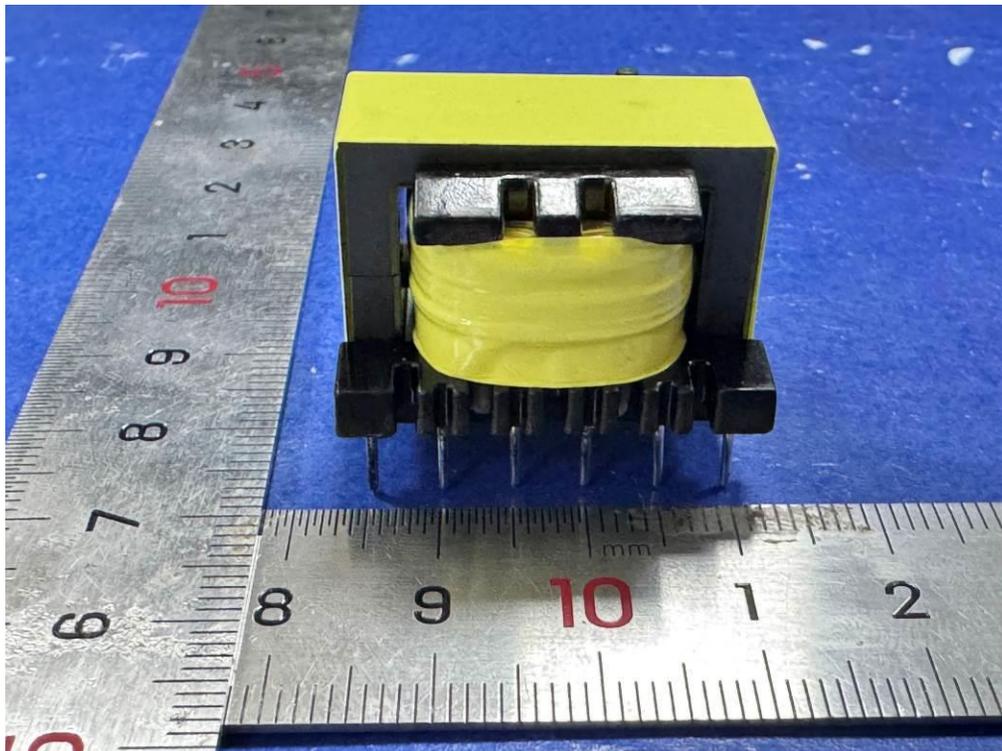


Figure 10. Transformer T1 view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B

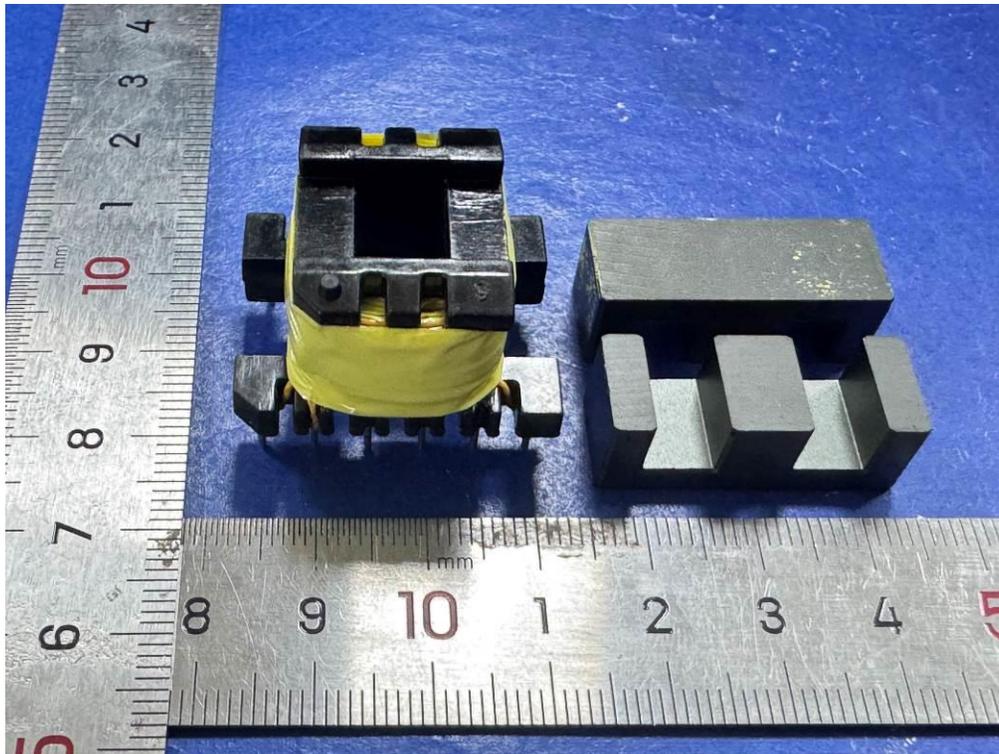


Figure 11. Transformer T1 view

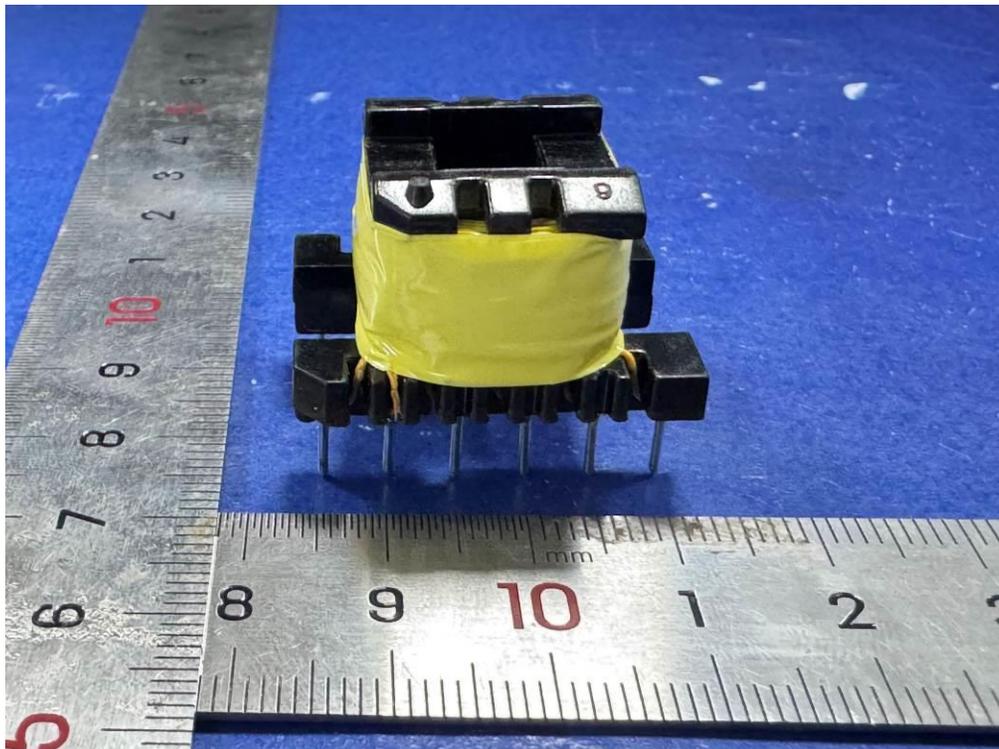


Figure 12. Transformer T1 view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B

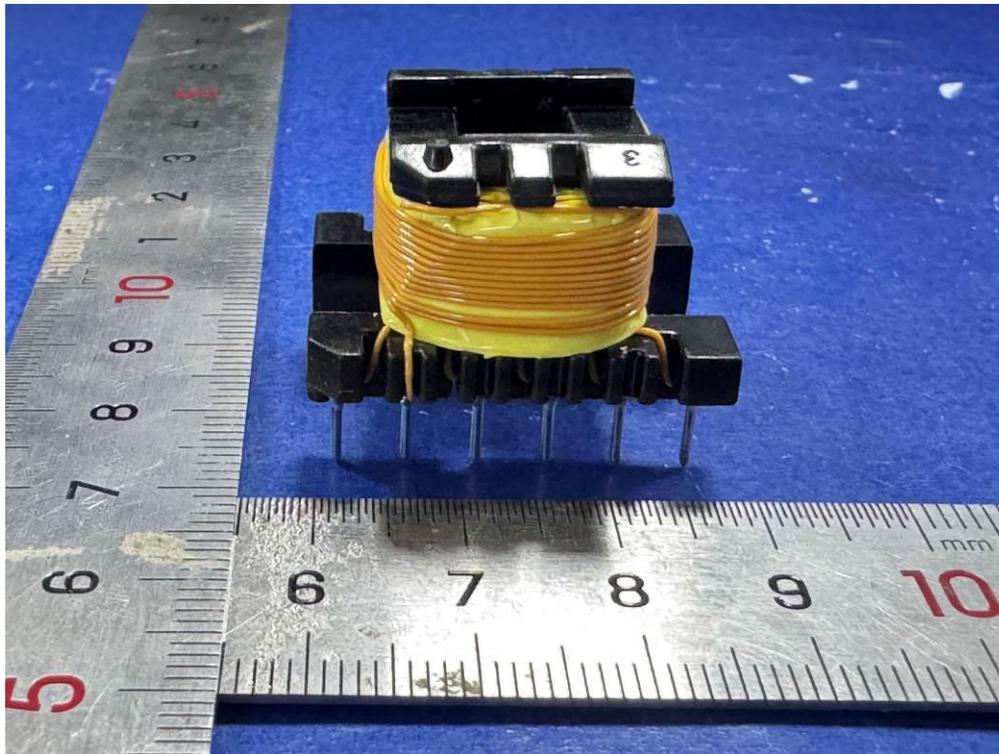


Figure 13. Transformer T1 view

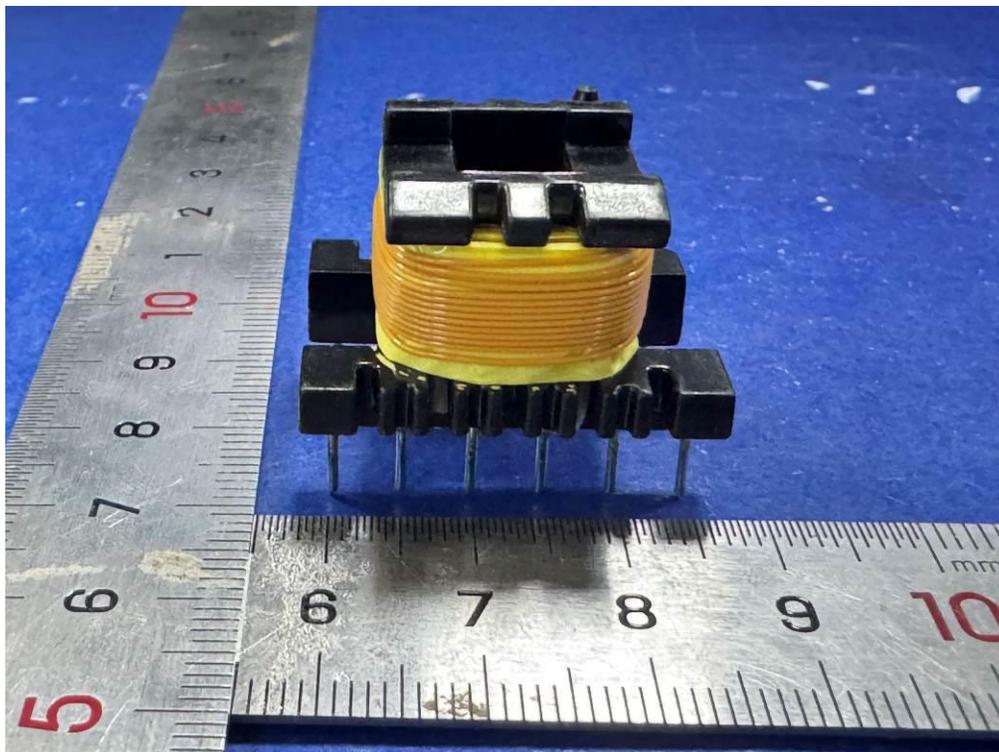


Figure 14. Transformer T1 view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B

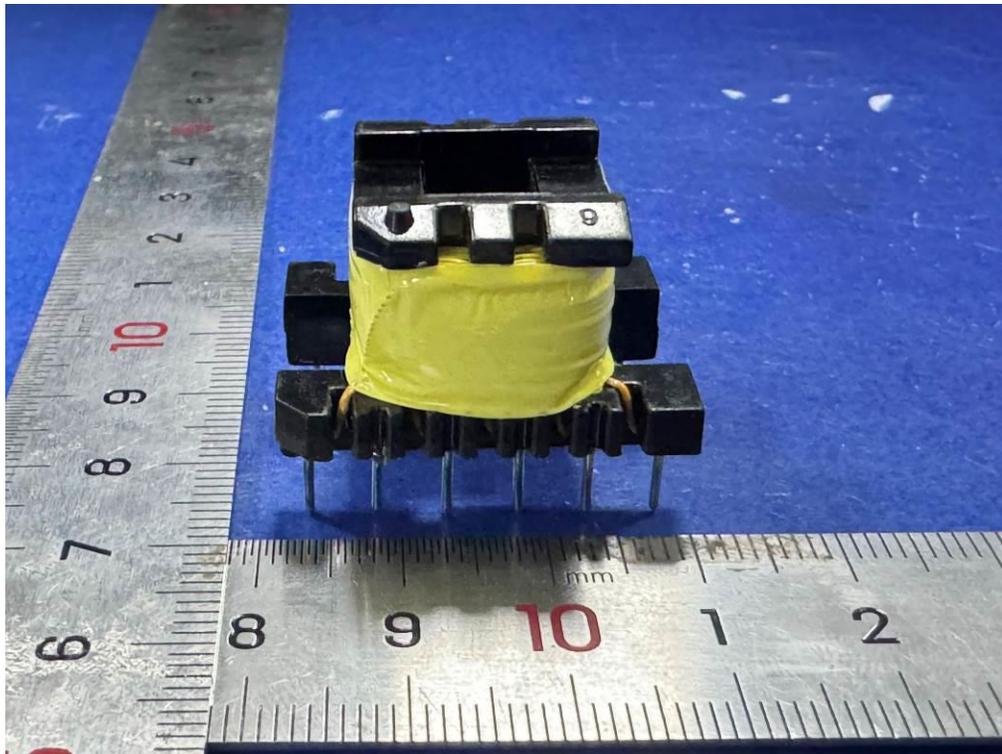


Figure 15. Transformer T1 view

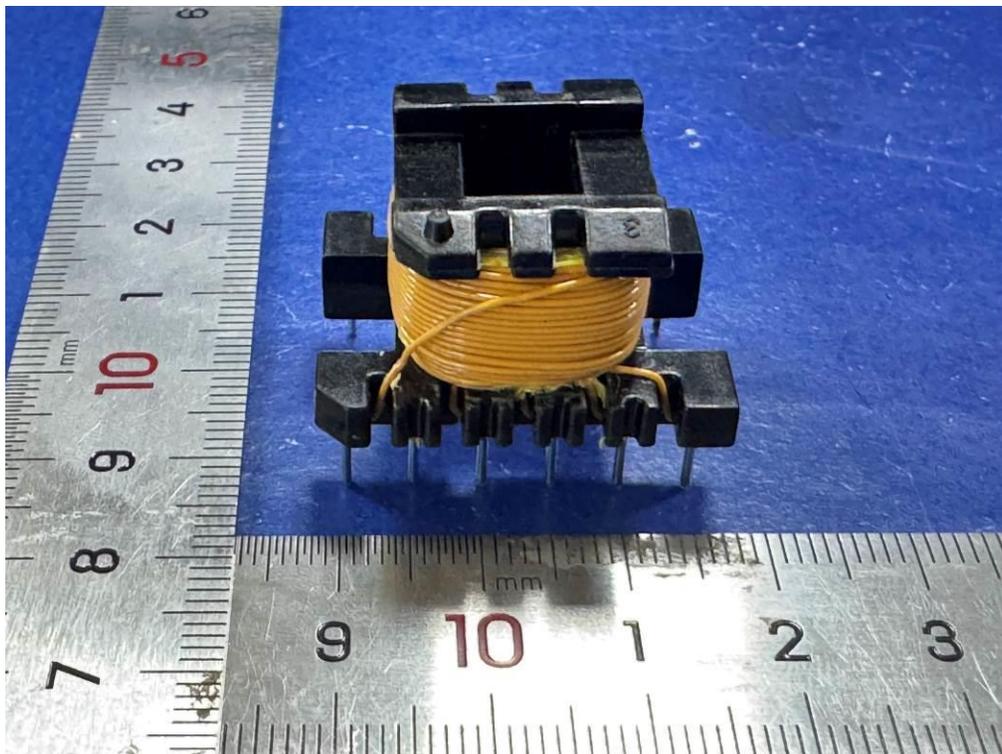


Figure 16. Transformer T1 view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B

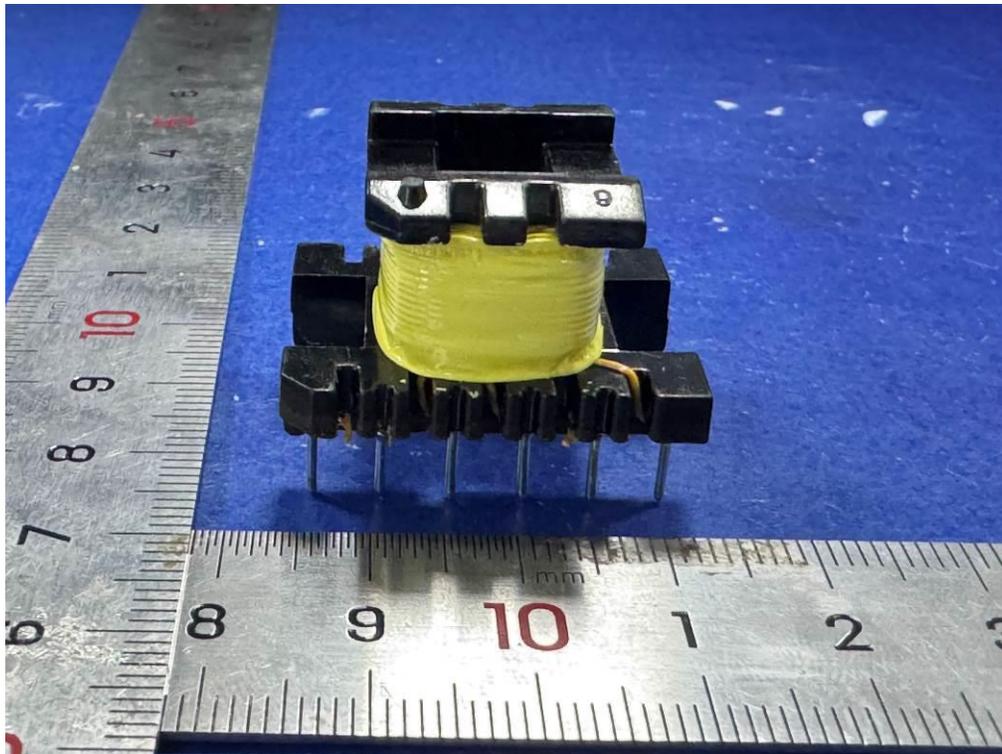


Figure 17. Transformer T1 view

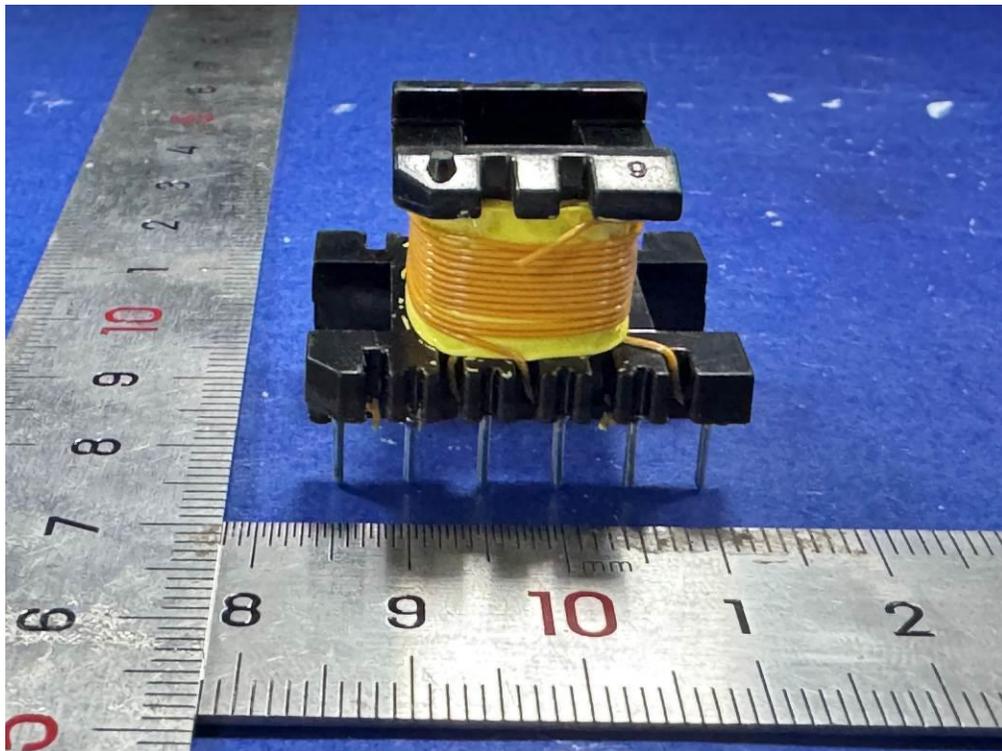


Figure 18. Transformer T1 view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B

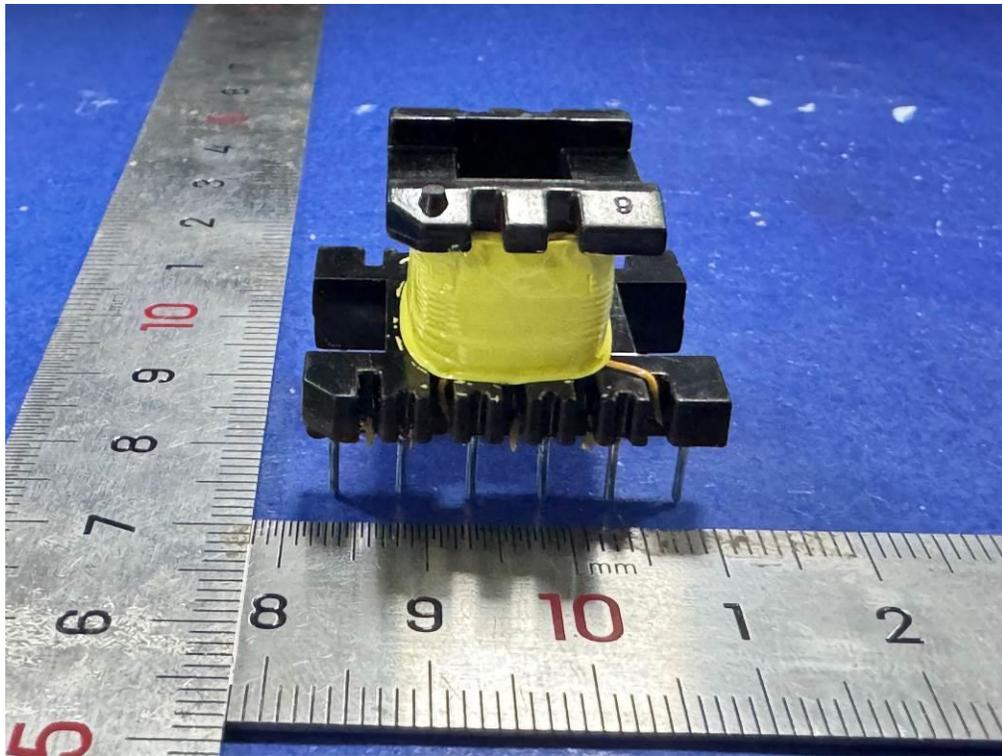


Figure 19. Transformer T1 view

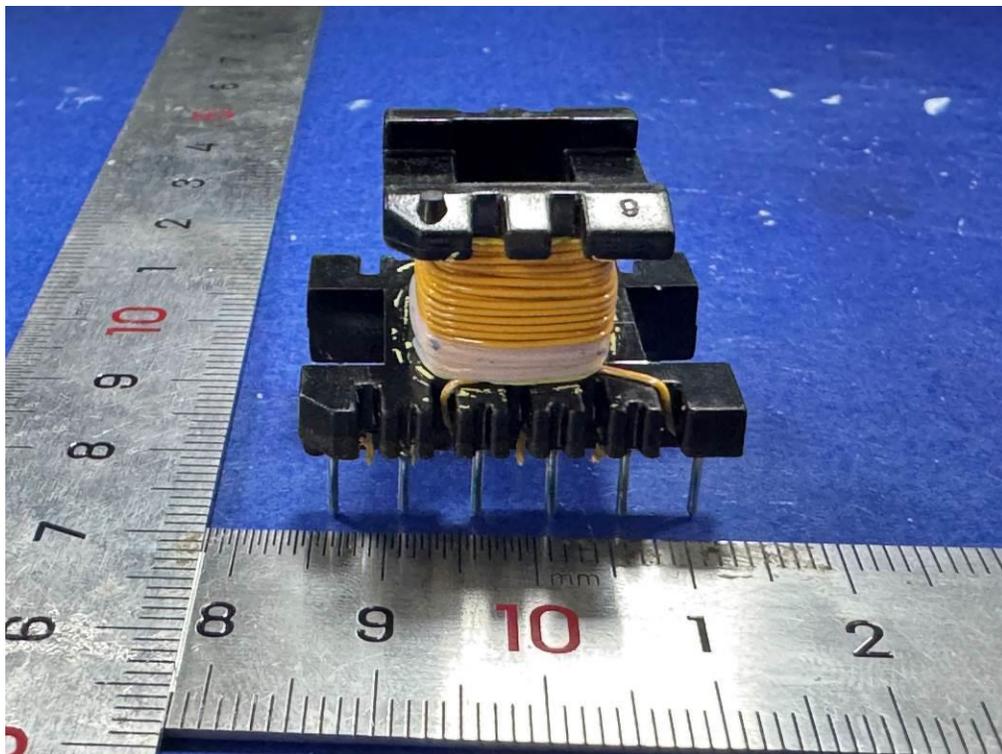


Figure 20. Transformer T1 view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B

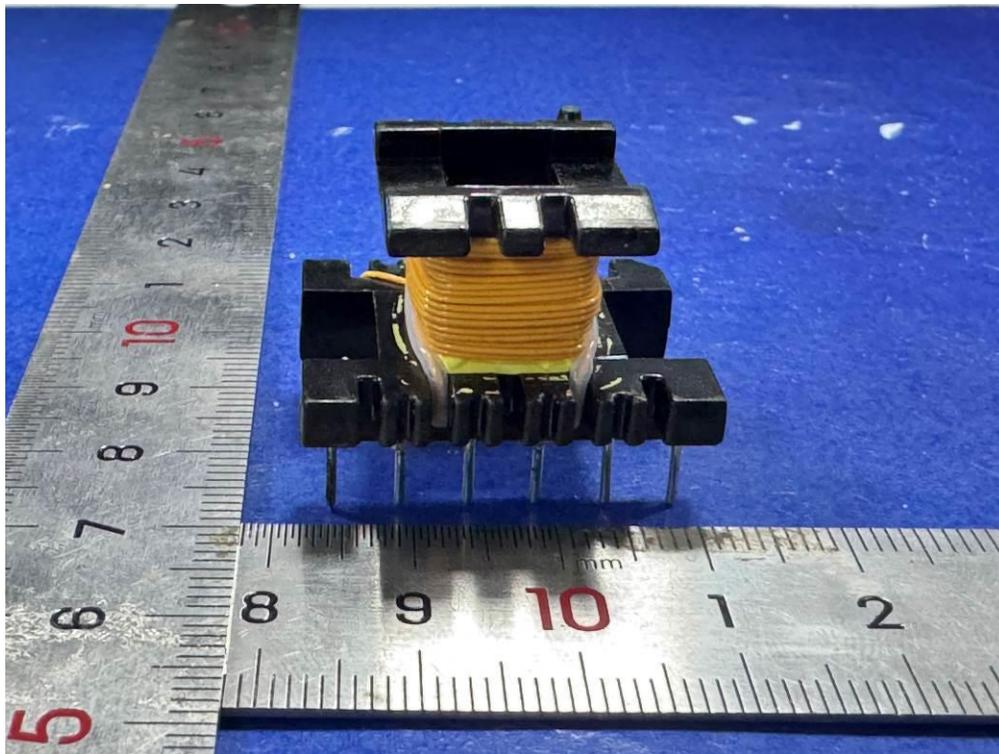


Figure 21. Transformer T1 view

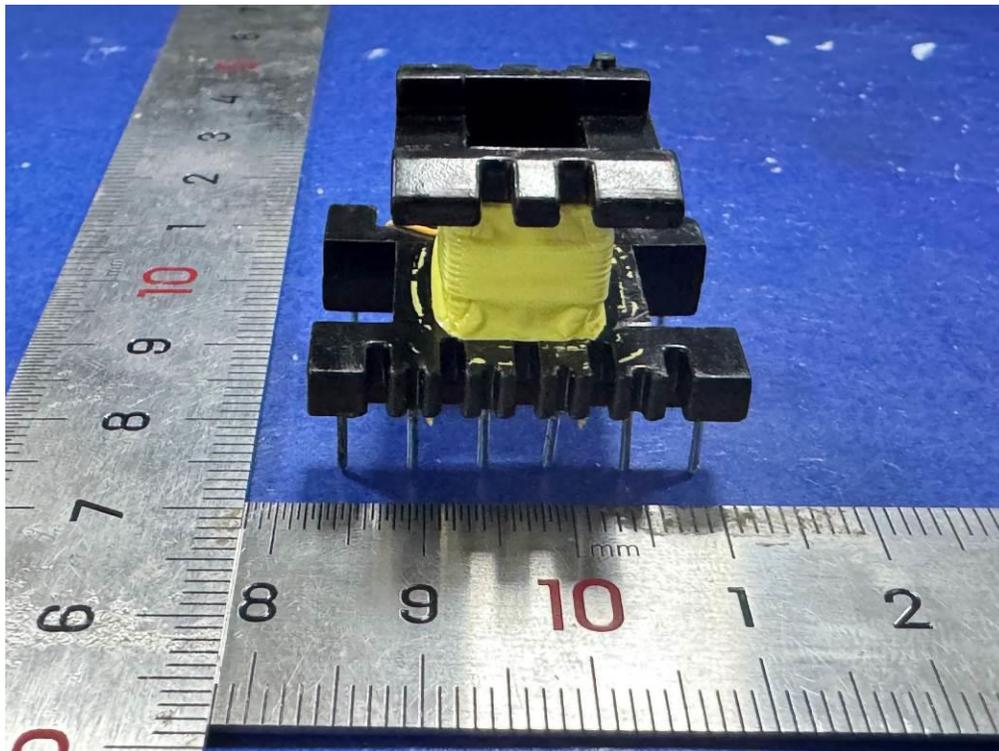


Figure 22. Transformer T1 view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B

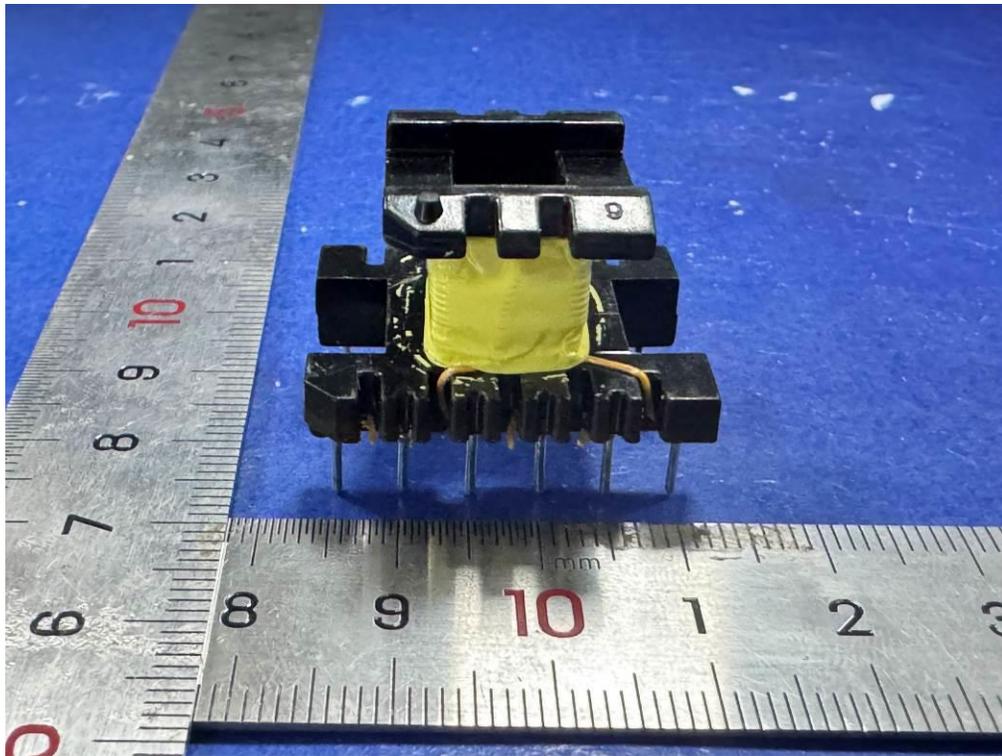


Figure 23. Transformer T1 view

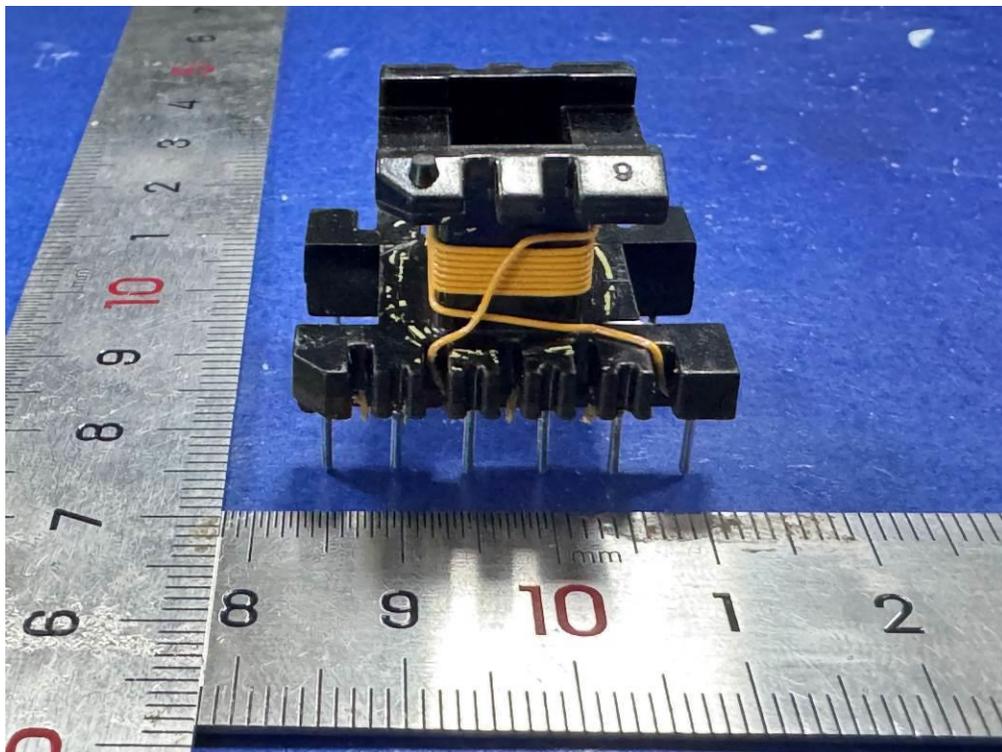


Figure 24. Transformer T1 view

Product: POE Injector

Type Designation: PSE802G, PSE801, PSE30, NX-POE151N, PSE801G, PSE30G, NX-1G30W2, PSE802G, PSE30TG, NX-1G30WS, PSE156G, PSE60G, NX-1G60W, PSE90G, NX-1G90W, PSE30WG-B, NX-POE30WG-B

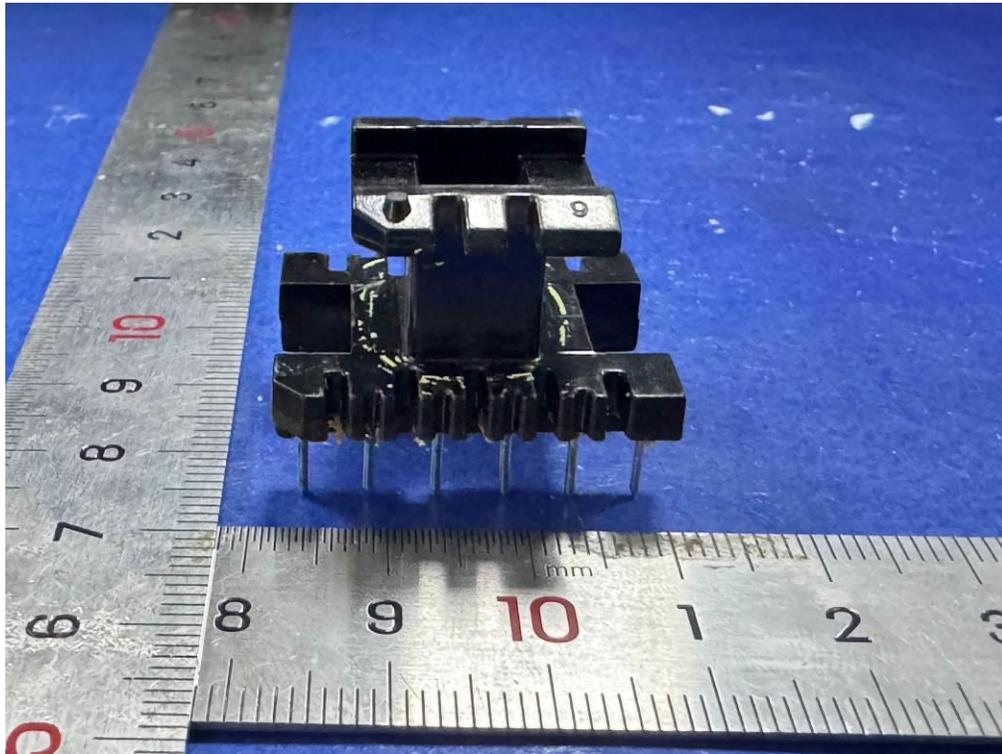


Figure 25. Transformer T1 view



Figure 26. Power cord set view